

OZ-FGL-BL-G2G Black Glass to Glass OZ-FGL-BL-G2W Black Glass to Wall



Fingerprint digital glass door lock with 4-in-1 access.

ACCESS MODES

- Finger print
- RFID card
- User PIN code
- Remote control (optional)

USER ACCESS RIGHTS

- Admin
- User

ALARMS

- Low battery notification
- Auto secure

SMART FEATURES

- Dual combination mode
- Anti-theft password
- Audit trail
- Smart freeze
- Door bell
- USB for power supply

DOOR THICKNESS

- 10-12mm

FINISH

- Silver


Optional Accessory – Remote Control to Unlock




A stylish range of latching lever handles with locks



GLASS CUT-OUT FOR ALL LEVER HANDLE STYLES

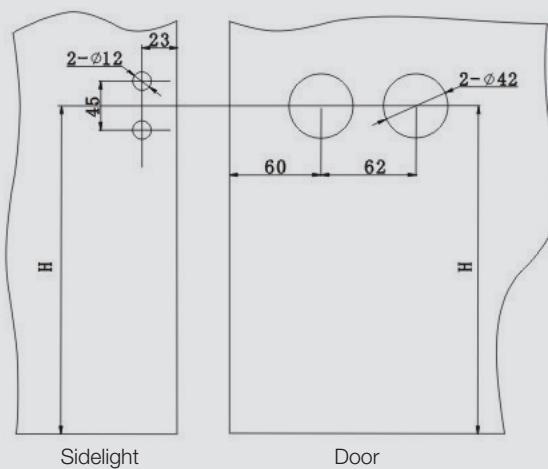

LEVER HANDLE TECHNICAL DIAGRAM

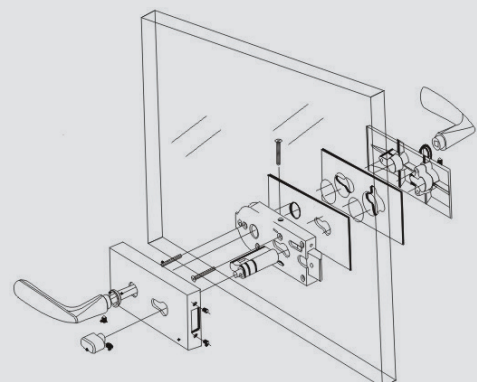

LL-01K / LL-01-R2-CC



AVAILABLE FINISHES

- Satin

LL-19K / LL-19-S1



AVAILABLE FINISHES

- Satin

LL-21SP / LL-19-S1-CC



AVAILABLE FINISHES

- Satin

LL-05K / LL-05-R1



AVAILABLE FINISHES

- Satin

LL-05-R1-CC



AVAILABLE FINISHES

- Satin

LA-301 / LA-312K Patch Lock and Patch Keeper



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- LA-301: Patch lock, 210 x 64 series 590 mortice lock with 36mm throw c/w oval cylinders
- LA-312k: Patch keeper, 210 x 64 for LA-301

FT-40 Overpanel to Side Panel Patch Fitting



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Overpanel to side panel patch fitting
- 15mm pivot

LT-25 / LT-26K Patch Lock and Patch Keeper




AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch lock series T-25
- Patch keeper for LT-25

LT-50 Patch Lock - Corner Fix



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch lock - corner fix, euro cylinder.
- Rectangular bolt and keeper

LT-51 Patch Lock - Corner Fix



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch lock - corner fix series Tc51
- Euro cylinder
- 15mm bolt

LT-52 / LT-53K Patch Lock and Patch Keeper



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- LT-52: Patch lock, centre fix, c/w euro style cylinder
- LT-53K: Keeper for LT-52 centre fix

LT-54 / LT-54K Patch Lock and Patch Keeper



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch turn bolt lock series T-54
- Patch Keeper for LT-54

LT-55 / LT-55k Patch Lock and Patch Keeper



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch Lock series T-55
- Patch Keeper for LT-55

LT-56 / LT-57K Patch Lock and Patch Keeper



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch lock series T-56
- Patch keeper for LT-56 & 57

LT-58 Patch Lock



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch lock series T-58

LT-70 / LT-70K Patch Lock and Patch Keeper



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch lock series T-70
- Patch keeper for LT-70

LT-81 / LT-81K Slide On Patch Lock and Patch Keeper





AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Slide on patch lock, single sided LT-81
- Slide on patch keeper for LT-81

LT-82 / LT-82K Slide On Patch Lock and Patch Keeper**AVAILABLE FINISHES**

- Mirror
- Satin

TECHNICAL DETAILS

- Slide on patch lock, double sided LT-82
- Slide on patch keeper for LT-82

LR-20 / LR-20L / LR-21K Patch Lock and Patch Keeper - Series R



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch lock series R-10
- Patch keeper series R-20
- Patch keeper series R-21

LR-25 Patch lock - Series R



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch lock series R-25

LR-51 / LR-53K Patch Lock and Patch Keeper - Series R



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch lock series R-51
- Patch keeper series R-53

LR-54 Patch lock - Series R



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch lock series R-54

LS-13 / LS-13K Sliding Patch Lock and Patch Keeper




AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Sliding patch lock S-13
- Sliding patch keeper S-13

LS-14K Patch Keeper - S



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch keeper S-14

LS-15K Sliding Patch Keeper



AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Patch keeper sliding S-15

LS-20 / LS-21 Sliding Patch Lock and Patch Keeper




AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Sliding lock, S-10, c/w cylinder, glass to glass
- Sliding lock, S-21, c/w cylinder, glass to wall

IL700C Indicator Lock - Door to Wall




AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Indicator lock
- Door to wall
- Glass cut out required

IL701C Indicator Lock - Door to Sidepanel




AVAILABLE FINISHES

- Mirror
- Satin

TECHNICAL DETAILS

- Indicator lock
- Door to sidepanel
- Glass cut out required

IL600C Indicator Lock - Door to Wall





AVAILABLE FINISHES


- Mirror
- Satin

TECHNICAL DETAILS

- Indicator lock
- Door to wall
- NO glass cut out required

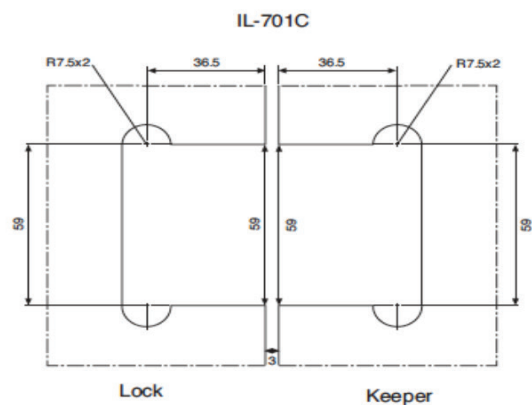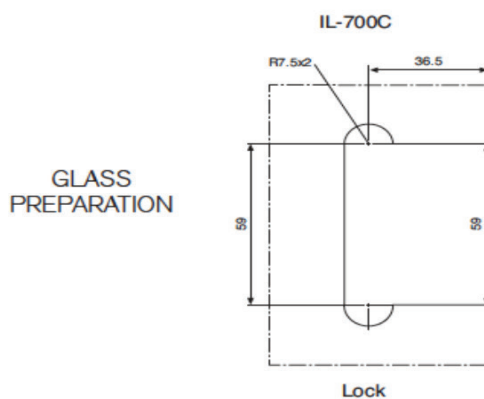

342.1 Patch Lock with Covers

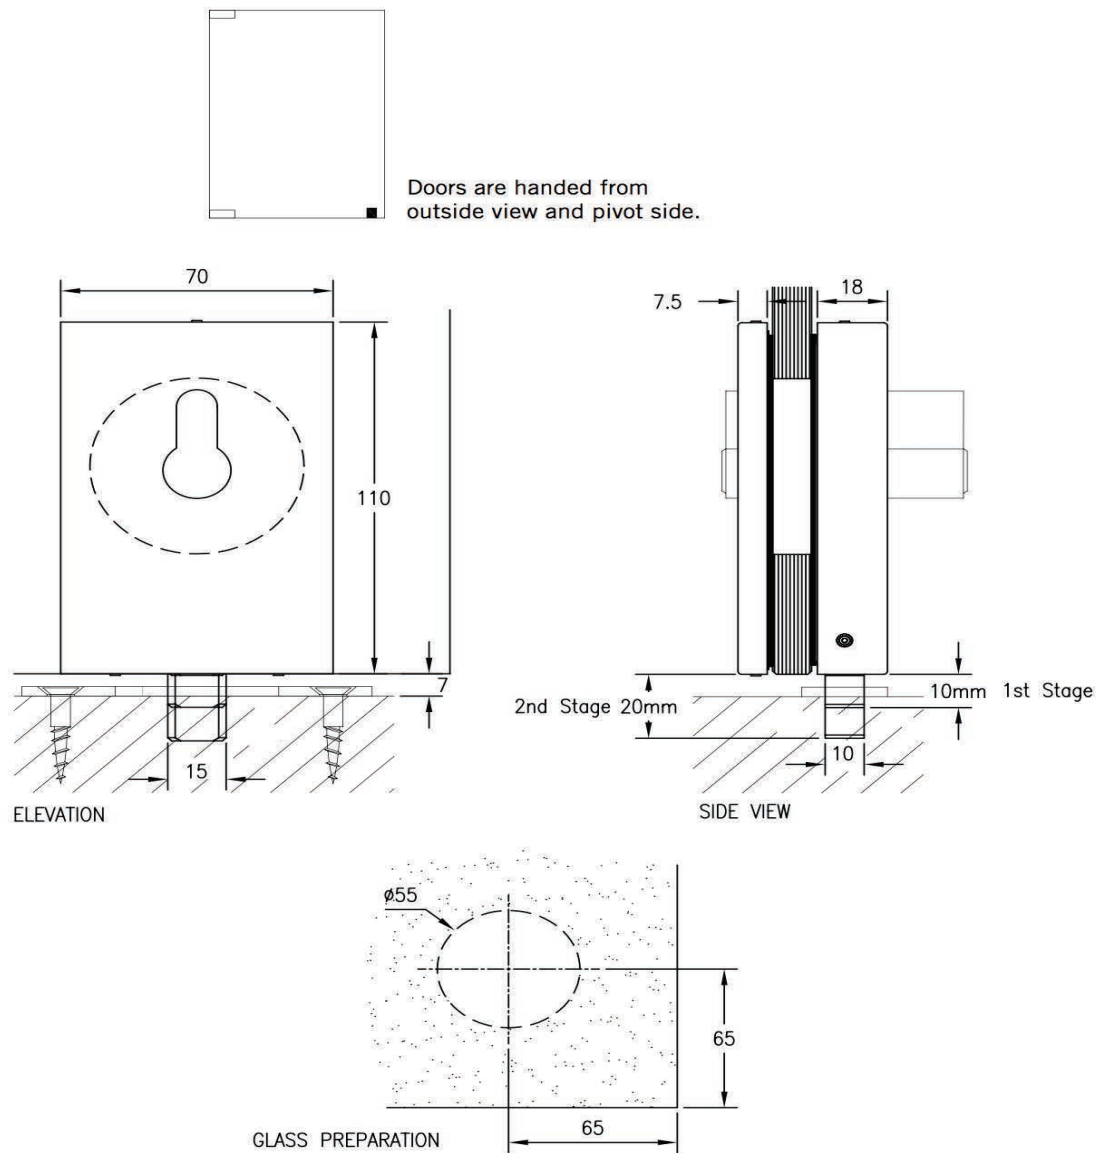


AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless



TECHNICAL DETAILS

- Universal 110mm x 70mm
- Lower pin throw patch lock with covers
- Specify glass thickness 10, 12 or 15mm
- Illustrated with 345 Keeper Plate
- Optional: CD 68 Cylinder

343.1 Patch Lock



Doors are handed from outside view and pivot side.

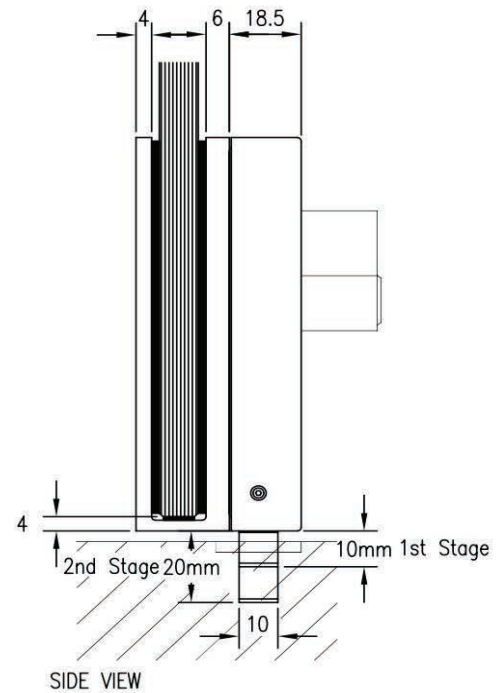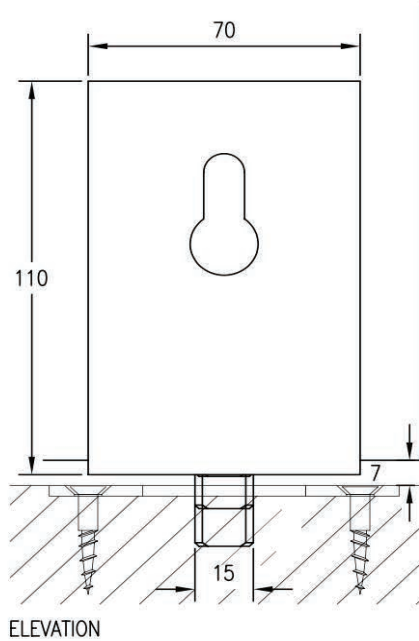


AVAILABLE FINISHES

- Aluminium: SAA

TECHNICAL DETAILS

- Universal 110mm x 70mm
- Lower pin throw slide over patch lock
- Specify glass thickness 10 or 12mm
- Illustrated with 345 Keeper Plate
- Optional: CD 68 Cylinder

M14.400 Patch Lock

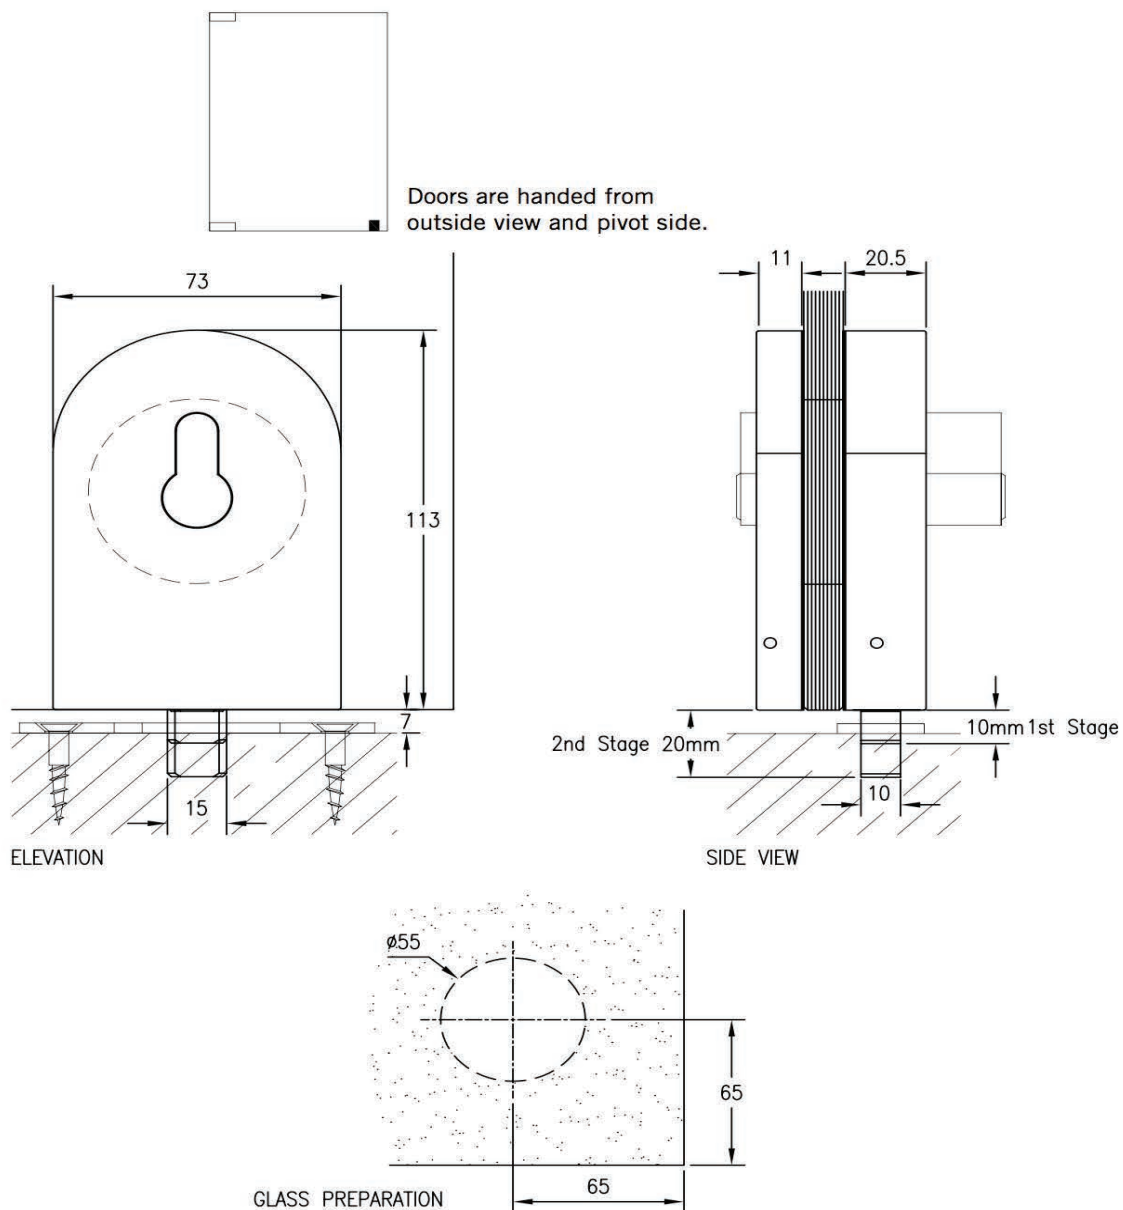


AVAILABLE FINISHES

- Stainless: SSS, PSS

TECHNICAL DETAILS




- Universal 110mm x 70mm
- Lower pin throw patch lock with covers
- Specify glass thickness 10, 12 or 15mm
- Illustrated with 345 Keeper Plate
- Optional: CD 68 Cylinder

US10 Patch Lock

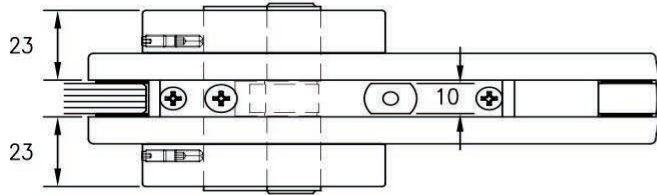

Doors are handed from outside view and pivot side.

REFLECTED PLAN

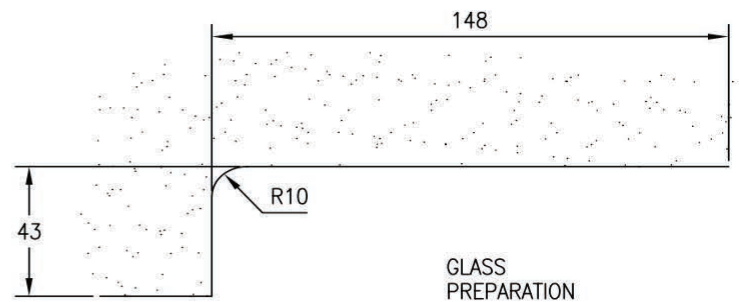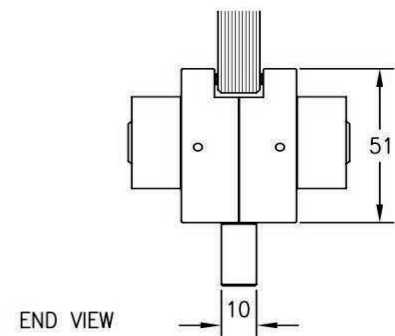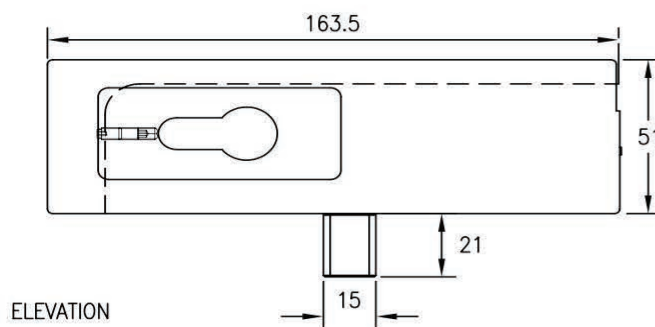


AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS


TECHNICAL DETAILS

- Universal 164mm x 51mm
- Lower pin throw patch lock
- Specify glass thickness 10, 12 or 15mm
- Optional: CD 68 Cylinder


US20 / GK50 Patch Lock




Doors are handed from outside view and pivot side.

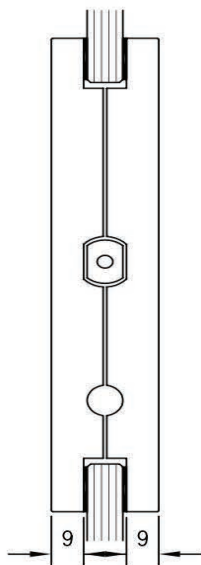


US 20 SIDE VIEW

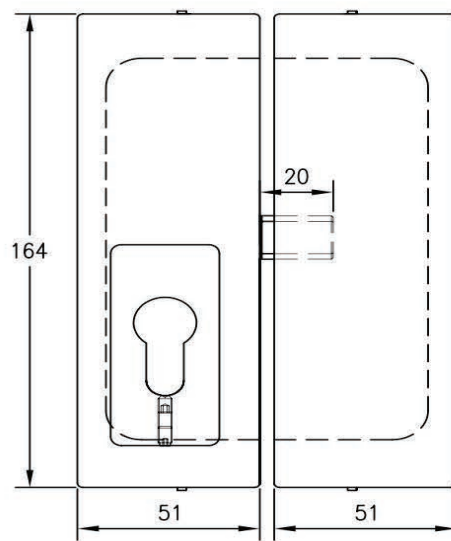


ELEVATION

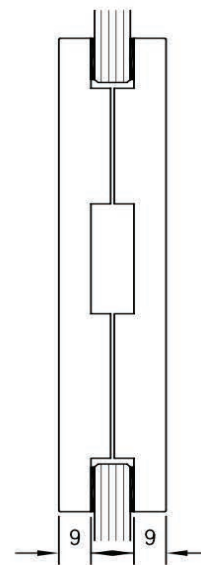

GK50 SIDE VIEW

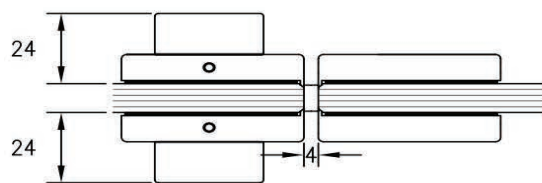

PLAN



GLASS PREPARATION US 20 & GK 50




AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS


TECHNICAL DETAILS

- Universal 164mm x 51mm
- Side mount pin throw patch lock and GK50 side mount patch keeper to suit US20
- Specify glass thickness 10, 12 or 15mm
- Optional: CD 68 Cylinder

CD351A Patch Lock

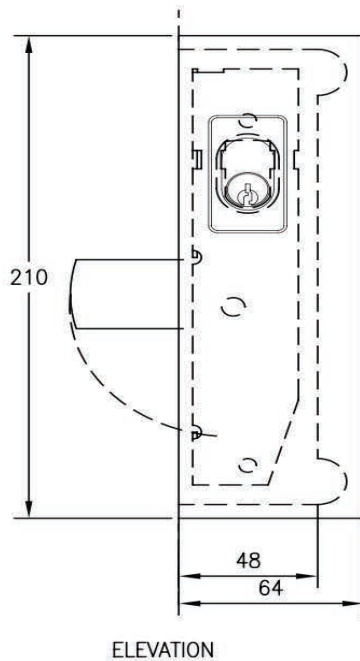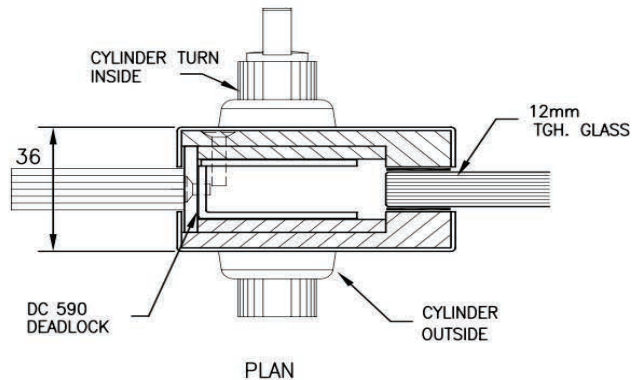

Doors are handed from outside view and pivot side.

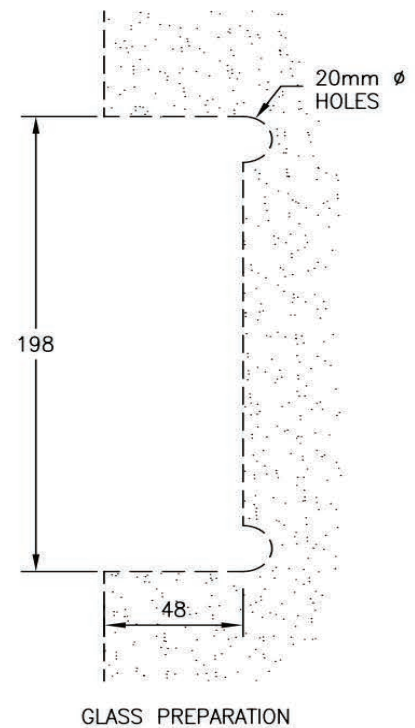


AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS



TECHNICAL DETAILS

- ON-EAZI side fix patch lock complete with door lock (DC 590)
- Specify lock operation cylinder, double cylinder or cylinder and turn
- Note: Add CD351K if matching patch keeper is required.
- Specify glass thickness 10, 12 or 15mm


CD351K Patch Lock



Doors are handed from outside view and pivot side.

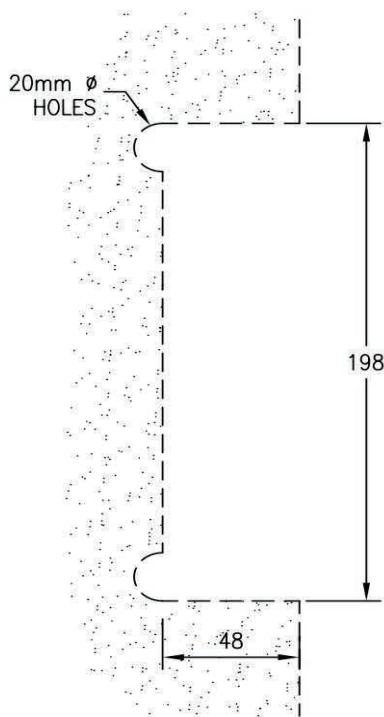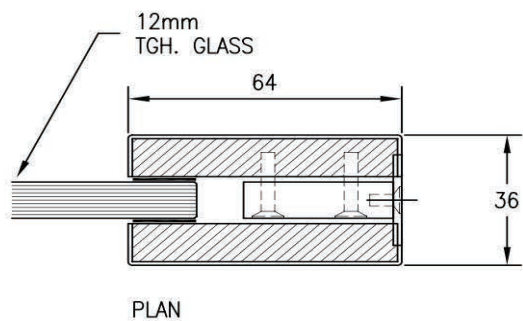

GLASS PREPARATION

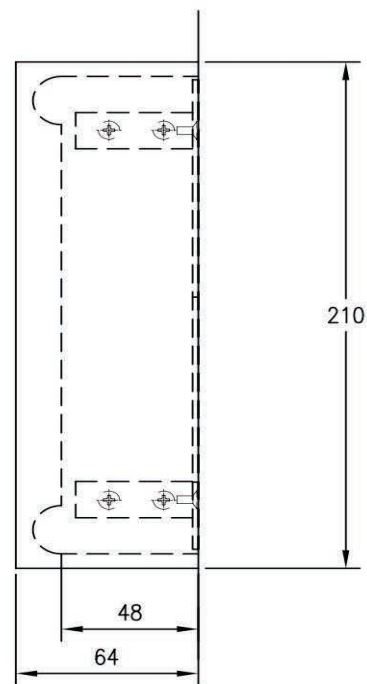

ELEVATION


AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

TECHNICAL DETAILS

- ON-EAZI side fix patch keeper to suit CD351A with door lock
- Specify glass thickness 10, 12 or 15mm

CD351B Patch Lock

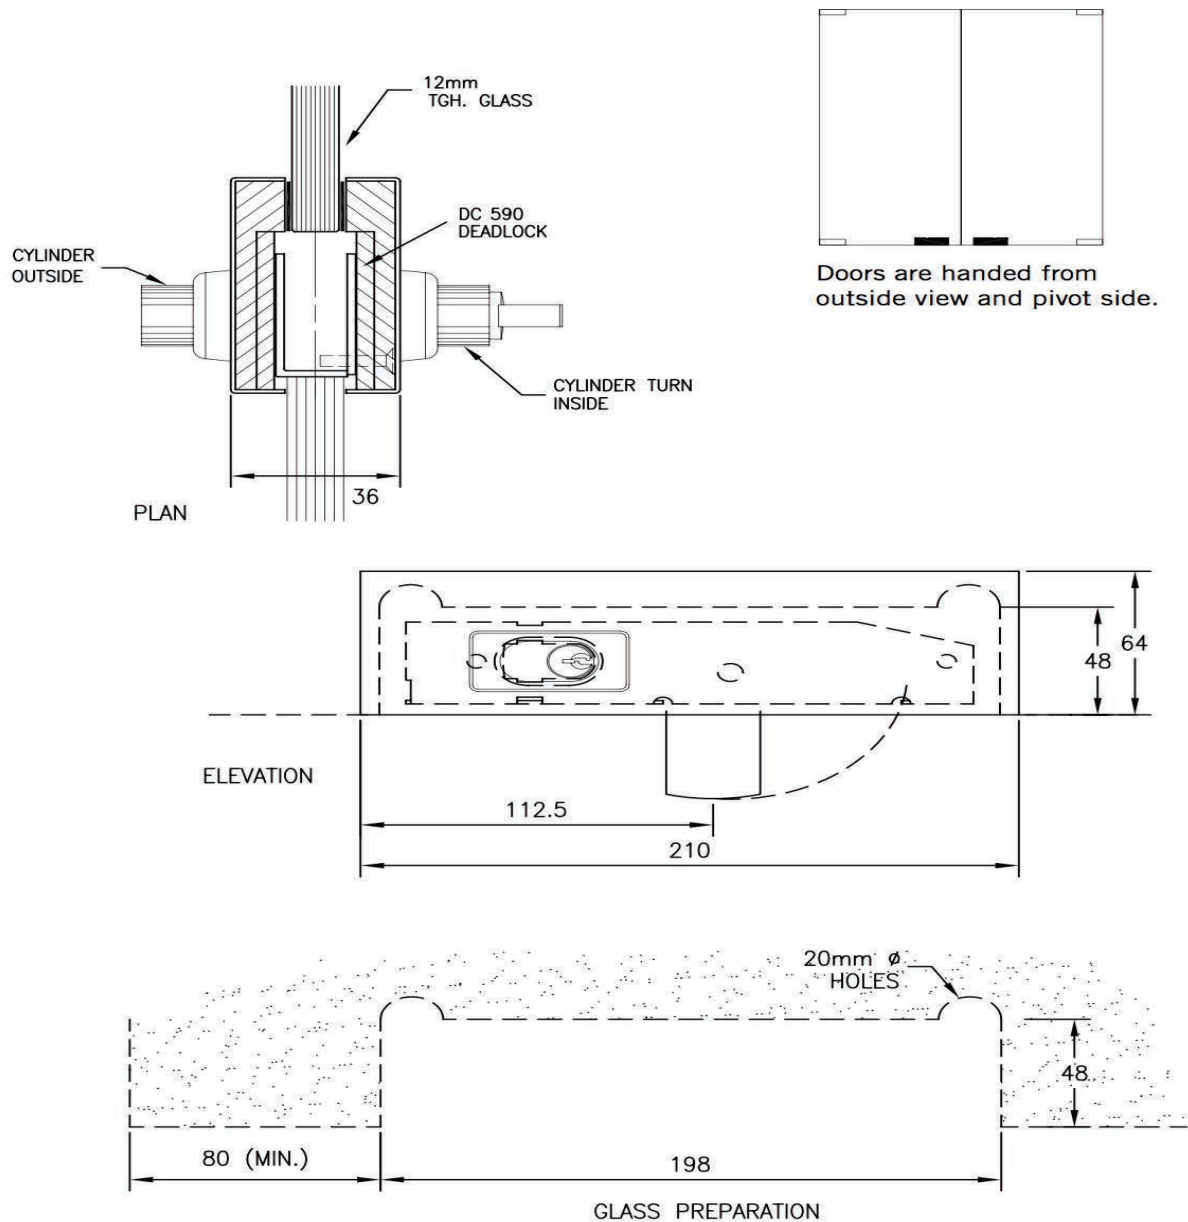


AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS



TECHNICAL DETAILS

- ON-EAZI bottom fix patch lock complete with door lock
- Specify lock operation single cylinder, double cylinder or cylinder and turn
- Add CD353 lock trough floor keeper if required
- Specify glass thickness 10, 12 or 15mm


CD351S Patch Lock



Doors are handed from outside view and pivot side.

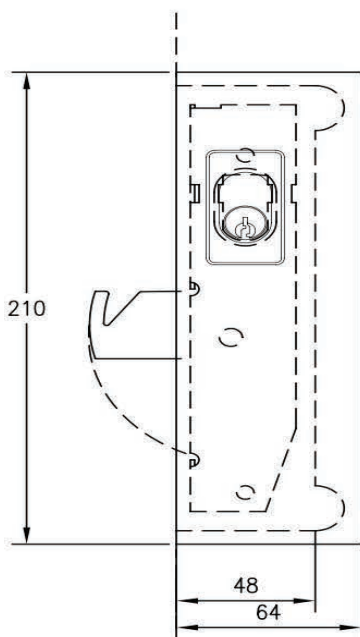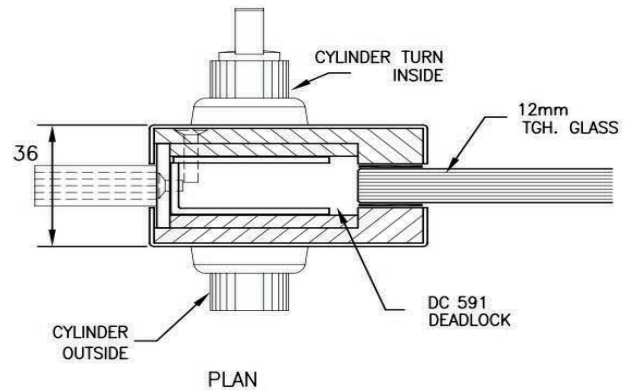

ELEVATION

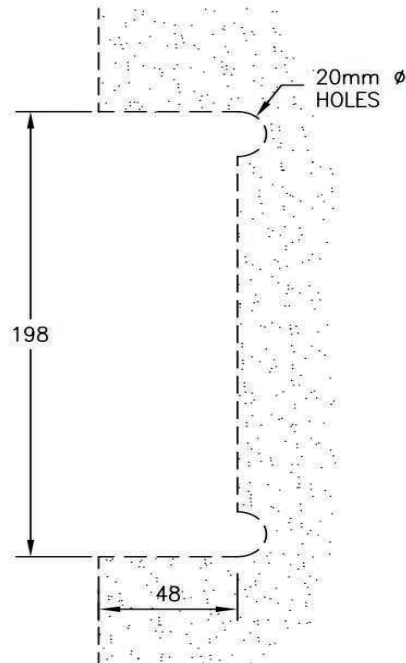

GLASS PREPARATION



AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS



TECHNICAL DETAILS

- ON-EAZI sliding door side fix patch
- Lock complete with door lock
- Specify lock operation single cylinder, double cylinder or cylinder and turn
- Add CD351KS if matching patch keeper if required
- Specify glass thickness 10, 12 or 15mm

CD351KS Patch Lock

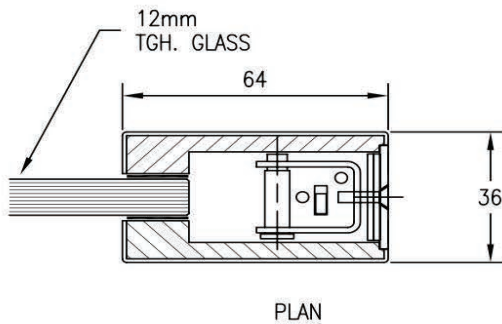

Doors are handed from outside view and pivot side.

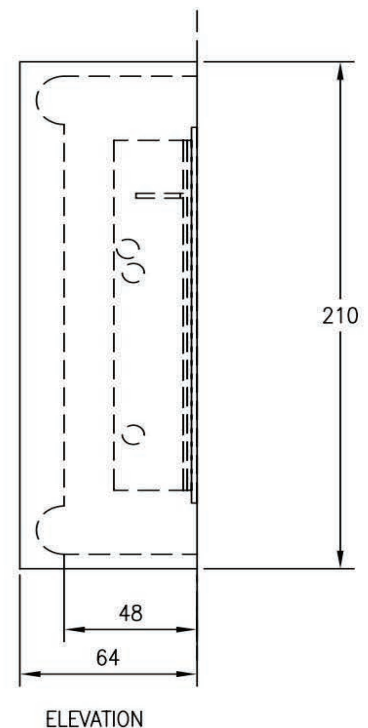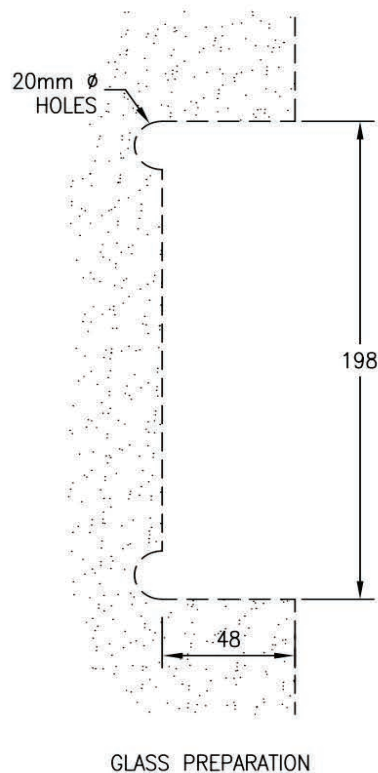



AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS



TECHNICAL DETAILS

- ON-EAZI sliding door side fix patch keeper to suit CD351S with door lock
- Specify glass thickness 10, 12 or 15mm

CD451 Patch Lock

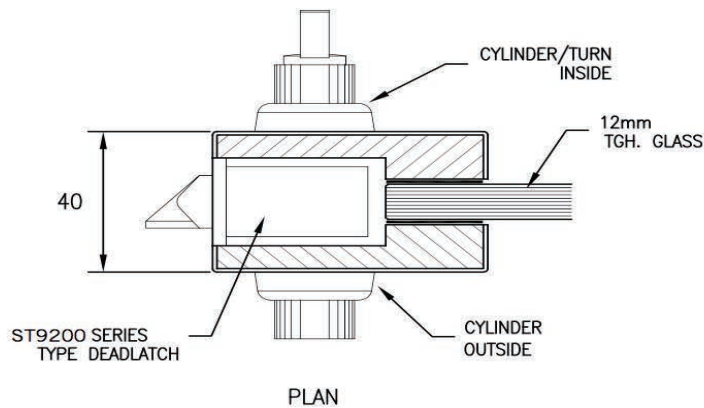

Doors are handed from outside view and pivot side.

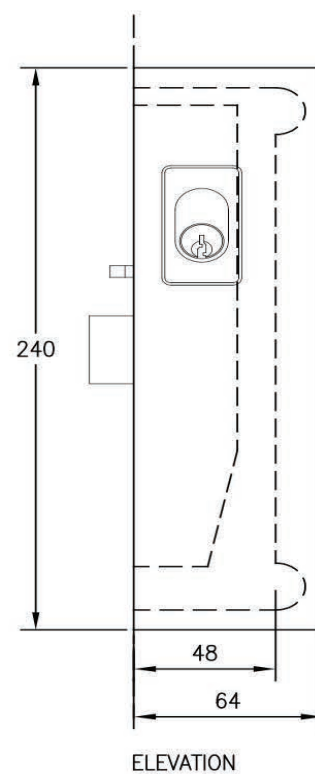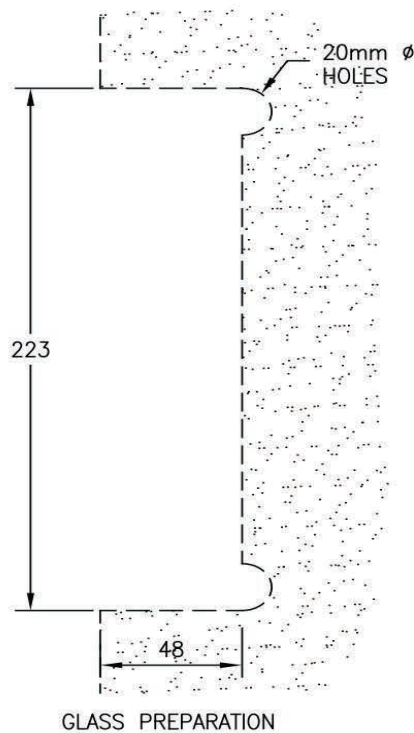


AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

TECHNICAL DETAILS

- ON-EAZI side fix patch lock complete with ST9210 lock
- Specify lock operation single cylinder, double cylinder or cylinder and turn. Specify hand of door.
- Add CD451K if matching keeper if required
- Specify glass thickness 10, 12 or 15mm

CD451E Patch Lock

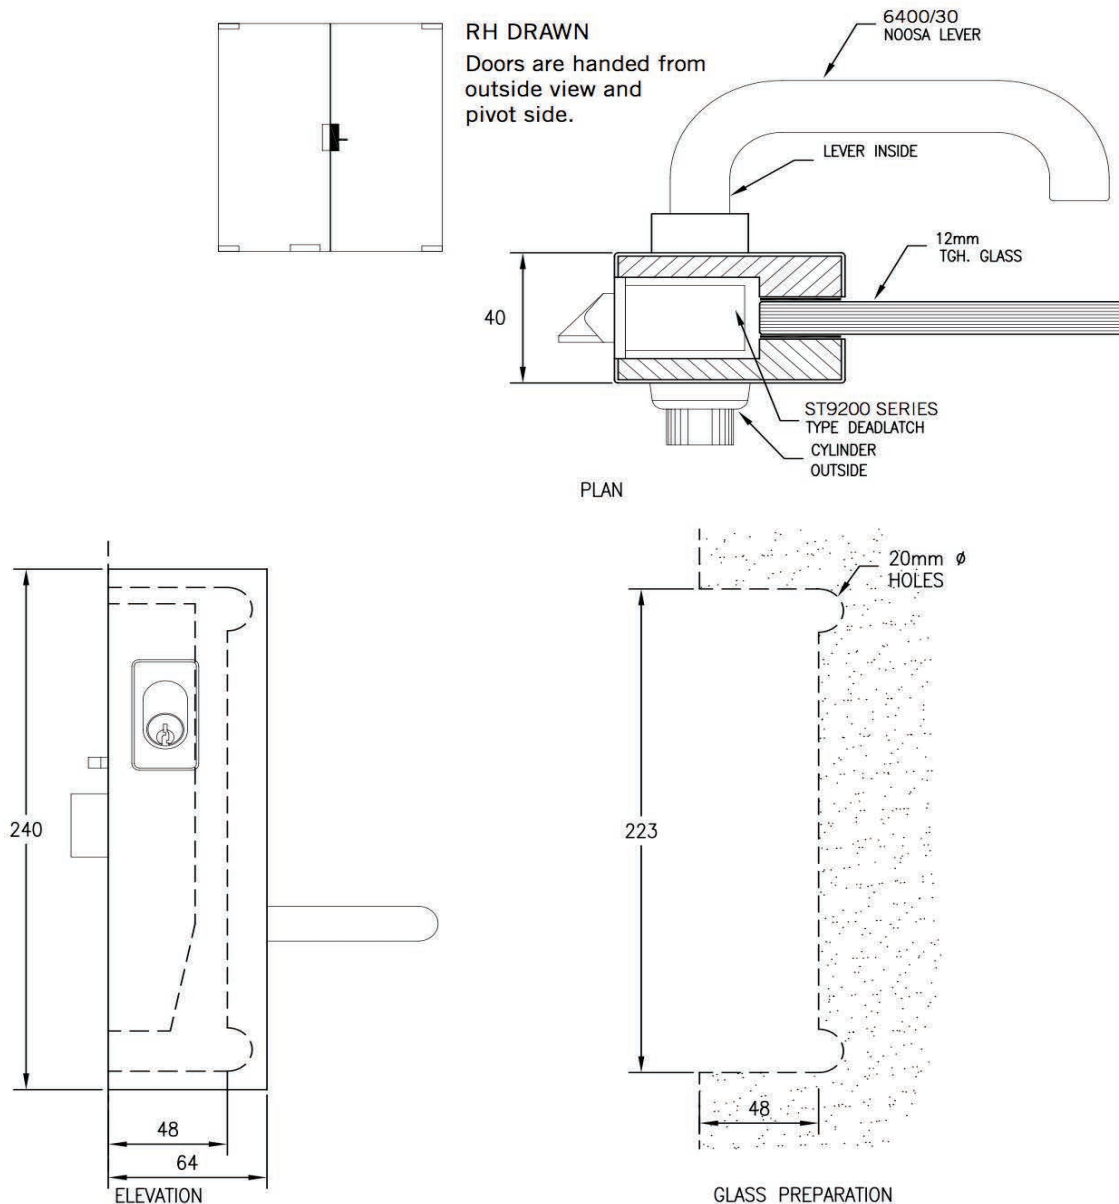




AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS


TECHNICAL DETAILS

- ON-EAZI side fix EGRESS patch lock complete with ST9212 lock and series lever furniture
- Specify lock operation, free lever inside only, cylinder or blank outside
- Specify hand of door
- Add CD451K if matching patch keeper is required
- Specify glass thickness 10, 12 or 15mm

CD451F Patch Lock

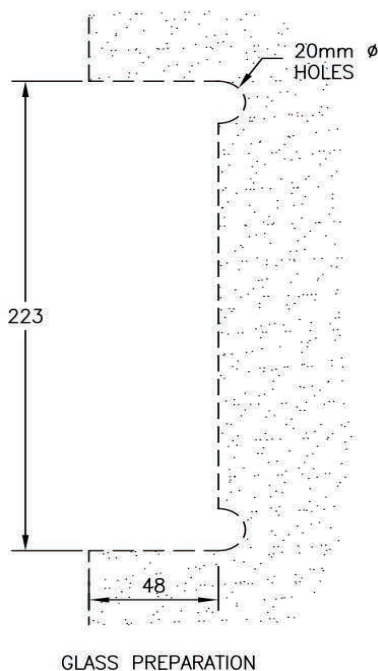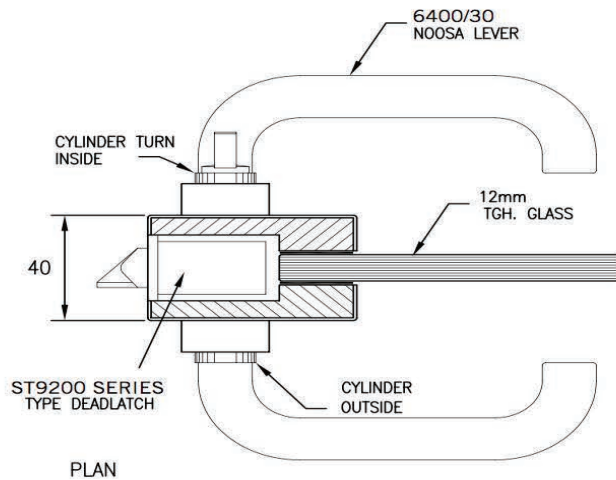

RH DRAWN
Doors are handed from outside view and pivot side.

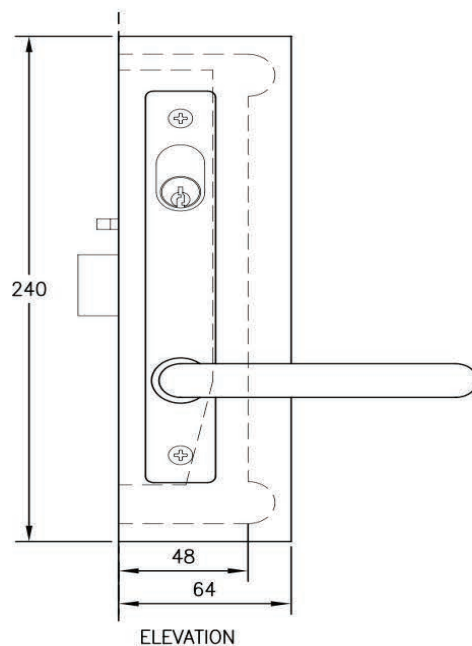
**AVAILABLE FINISHES**

- Aluminium: Mill, SAA
- Stainless: SSS, PSS




TECHNICAL DETAILS

- ON-EAZI side fix patch lock complete with ST9212 lock and 6400 series lever furniture
- Specify lock operation single cylinder, double cylinder or cylinder and turn with double levers
- Specify hand of door
- Add 451K if matching patch keeper is required
- Specify glass thickness 10, 12 or 15mm

CD451K Patch Lock



Doors are handed from outside view and pivot side.

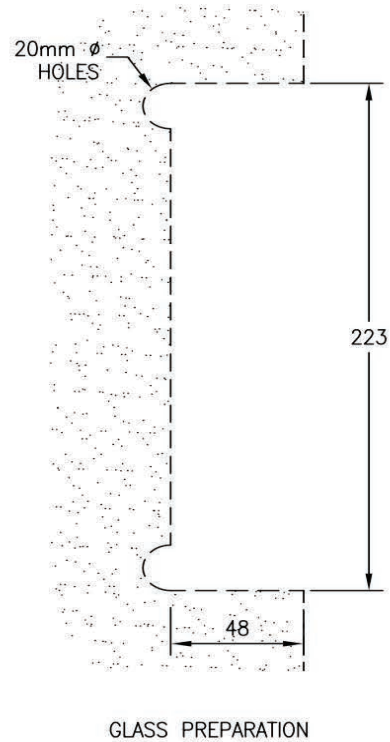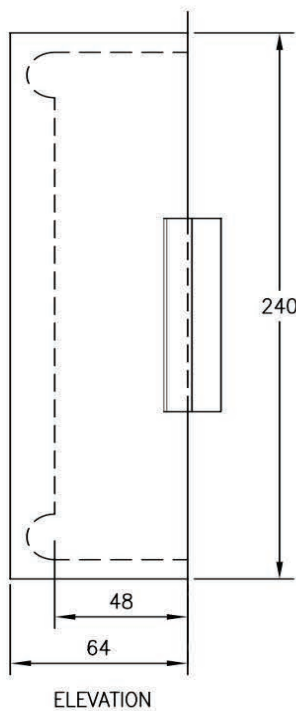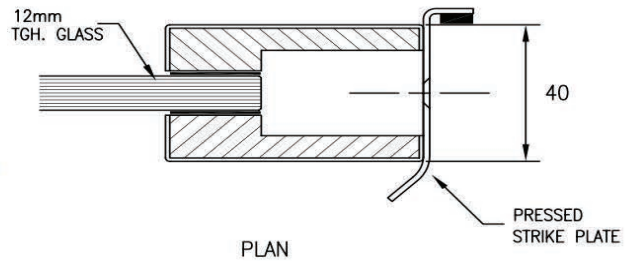



AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

TECHNICAL DETAILS

- ON-EAZI side fix patch lock keeper to suit CD451
- CD451E and CD451F with ST9200 series locks
- Specify glass thickness 10, 12 or 15mm



CD451KE Patch Lock

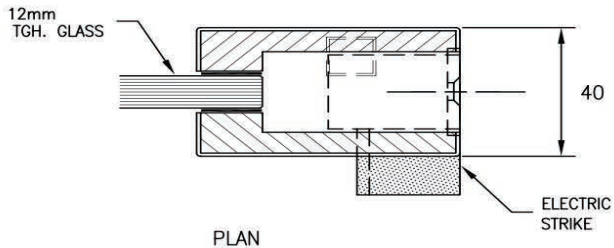

LH DRAWN

Note: state open in or open out at the time of order

Doors are handed from outside view and pivot side.

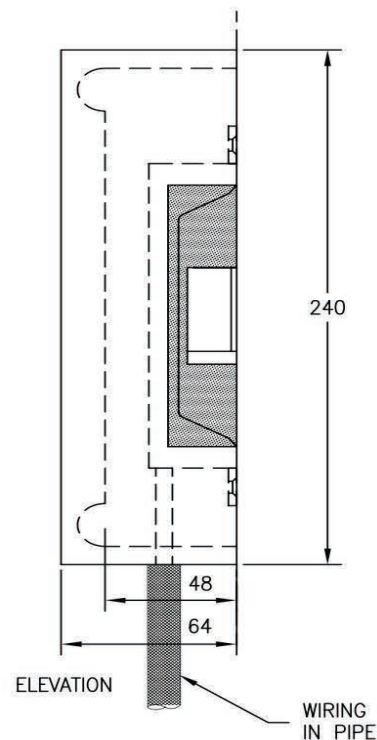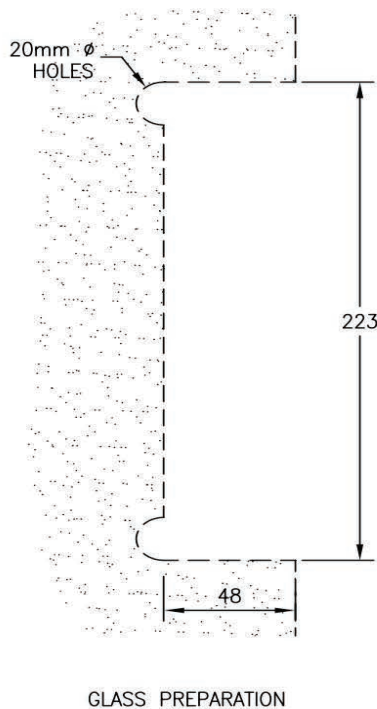


AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

TECHNICAL DETAILS



- ON-EAZI side fix patch keeper incorporating FSH FES20M electric strike to suit CD451, CD451E and CD451F with ST9200 series locks
- Note: wiring possibilities include surface pipe, edge channel or horizontal silicone joint
- Note: wiring by surface pipe indicated on drawing
- Specify glass thickness 10, 12 or 15mm
- Specify handing

CD451/3540 Patch Lock

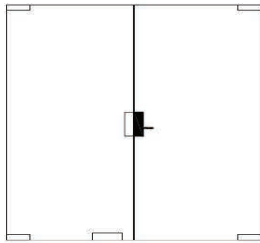


RH DRAWN

Doors are handed from outside view and pivot side.

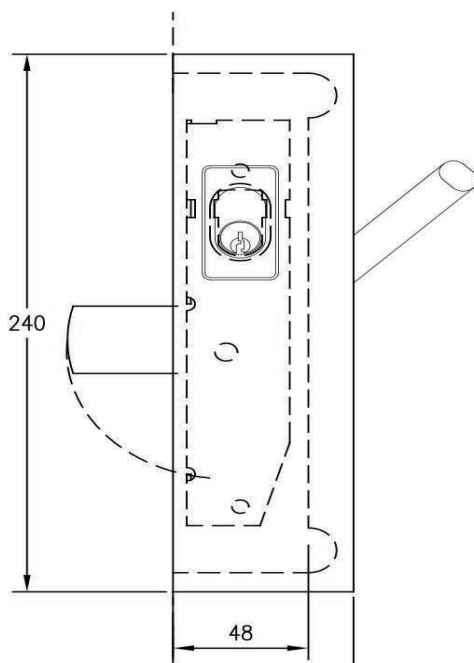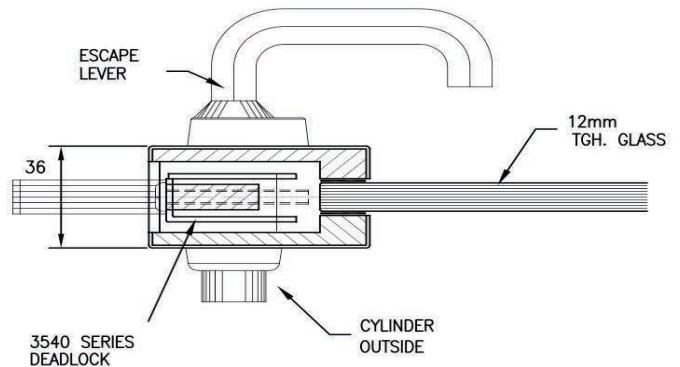

ELEVATION

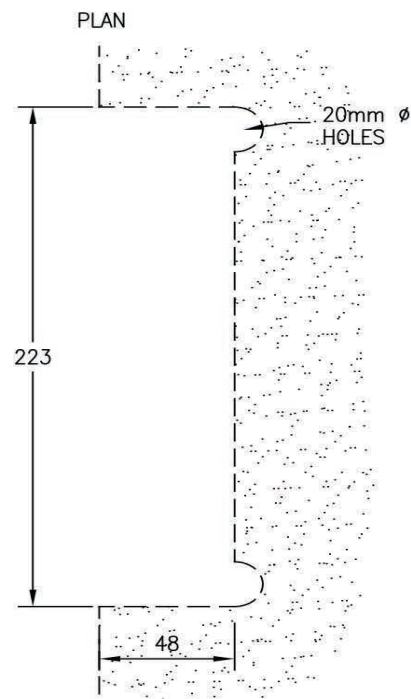

GLASS PREPARATION


AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

TECHNICAL DETAILS




- ON-EAZI side fix patch lock complete with door lock (3542 long throw) or (3542 short throw)
- Specify lock operation cylinder outside and lever inside or lever inside only
- Specify hand of door
- Specify CD451/3542 for long throw or CD451/3540 for short throw or CD451/3541 for sliding lock
- Note: Add CD451 K/3540 if matching patch keeper is required.
- Specify glass thickness 10, 12 or 15mm

CD451K/3540 Patch Lock



NON HANDED

Doors are handed from outside view and pivot side.

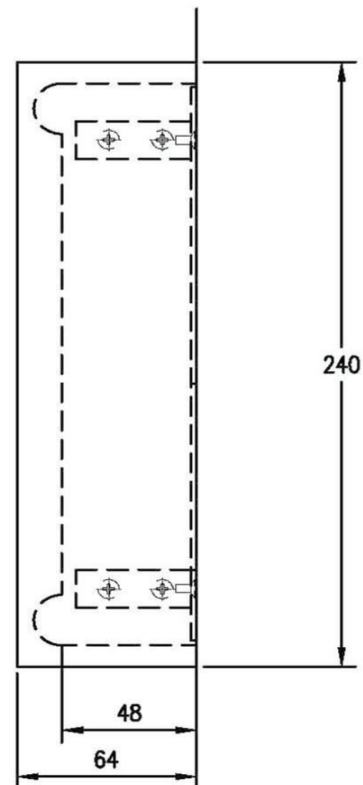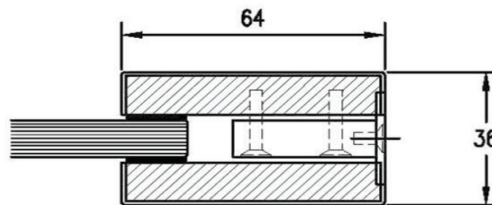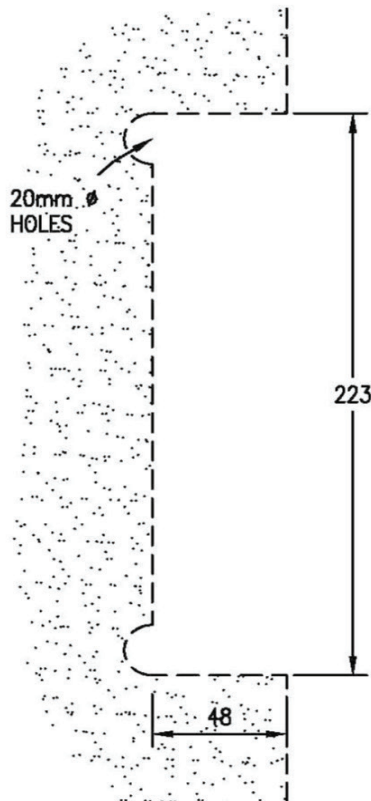


AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

TECHNICAL DETAILS


- ON-EAZI side fix patch keeper to suit CD451/3540 door lock
- Specify glass thickness 10, 12 or 15mm

CD1050 Patch Lock




NON HANDED


Doors are handed from outside view and pivot side.

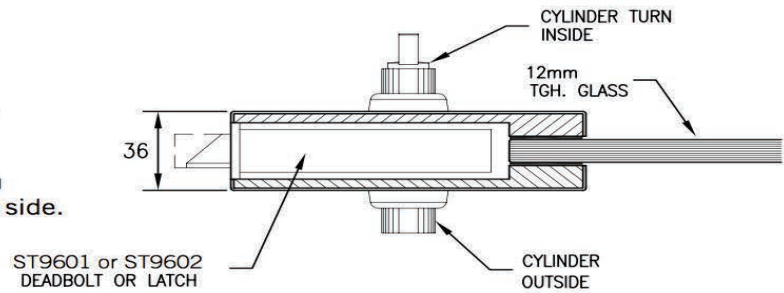

PLAN

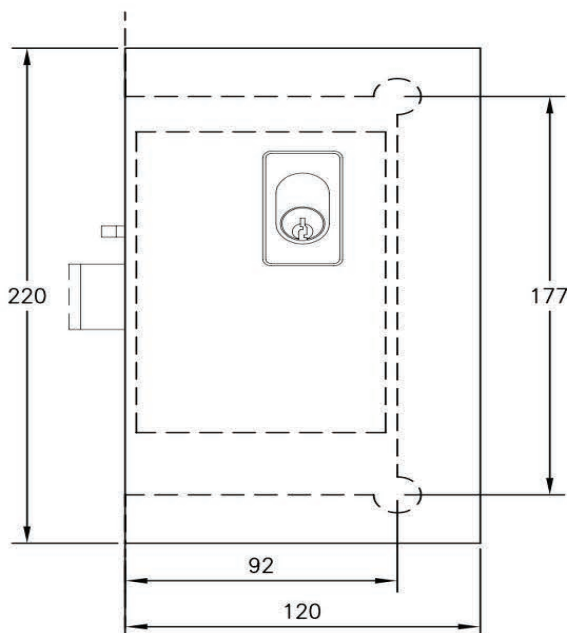

ELEVATION

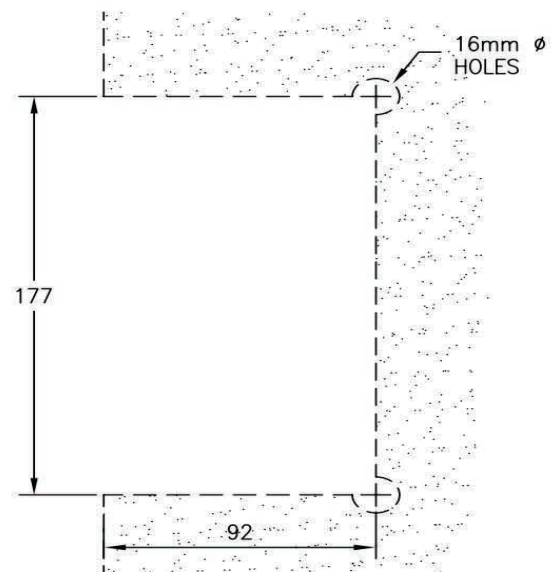

GLASS PREPARATION



AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

TECHNICAL DETAILS


- ON-EAZI side fix patch lock complete with wide backset door lock (ST9601 or ST9602)
- Specify lock operation single cylinder, double cylinder or cylinder and turn
- Specify hand of door
- Note: Add CD1051K or CD1050K if matching patch keeper required
- Specify glass thickness 10, 12 or 15mm
- Specify lock type ST9601, Deadbolt/ST9602 or Deadlatch

CD1050E Patch Lock

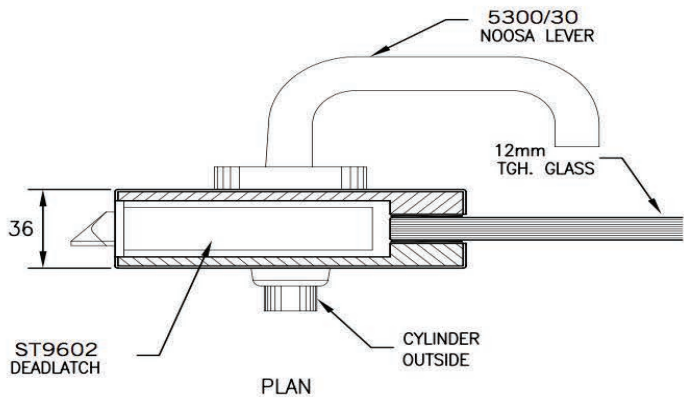


RH DRAWN

Doors are handed from outside view and pivot side.

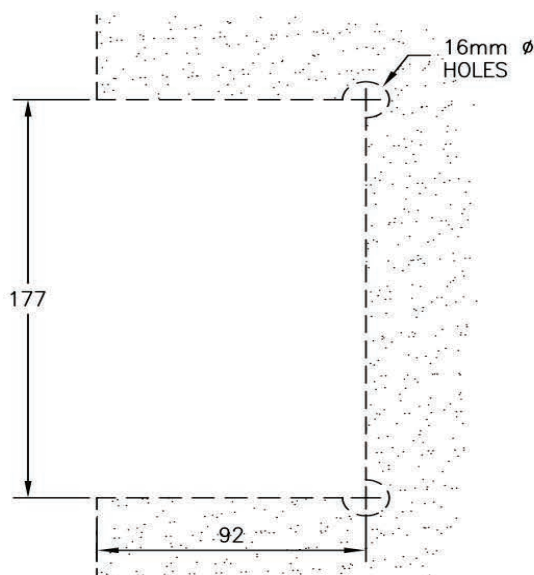

GLASS PREPARATION

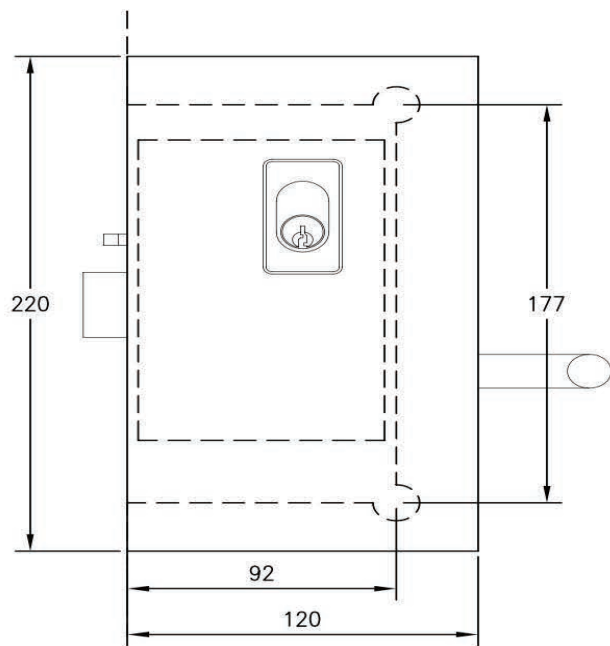

ELEVATION


AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

TECHNICAL DETAILS


- ON-EAZI side fix EGRESS latch lock complete with wide backset door lock (ST9602) and lever furniture inside only.
- Specify lock operation free lever inside always, cylinder or blank outside
- Specify hand of door
- Note: Add CD1051K or CD1050K if matching patch keeper required
- Specify glass thickness 10, 12 or 15mm

CD1050F Patch Lock




RH DRAWN


Doors are handed from outside view and pivot side.

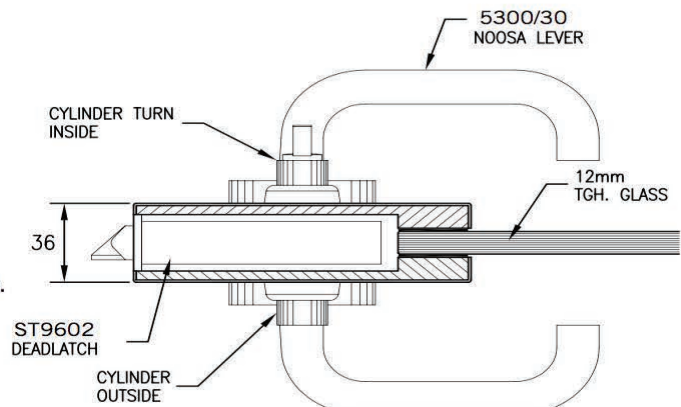

PLAN

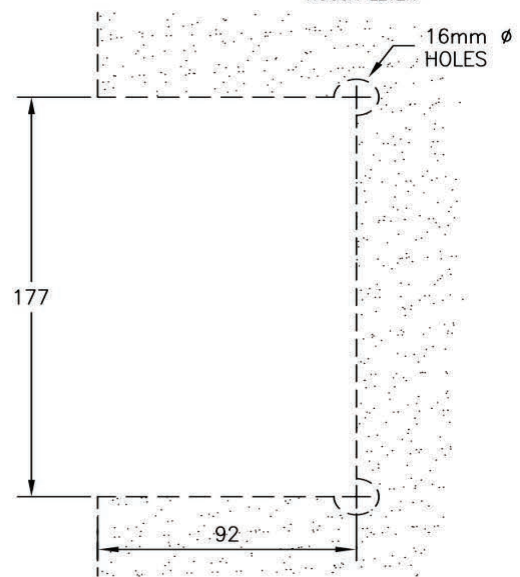

GLASS PREPARATION

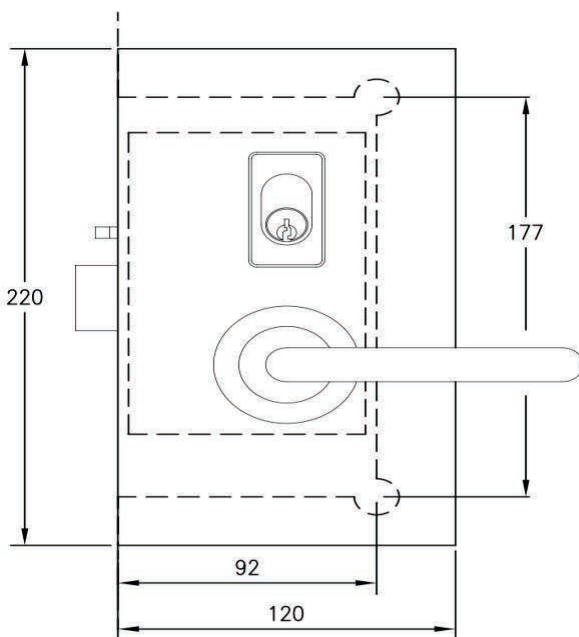

ELEVATION



AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

TECHNICAL DETAILS


- ON-EAZI side fix patchlock complete with wide backset door lock (ST9602) and lever furniture
- Specify lock operation single cylinder, double cylinder or cylinder and turn with double levers.
- Specify hand of door
- Note: Add 1051K or CD1050K if matching patch keeper required
- Specify glass thickness 10, 12 or 15mm

1050K Patch Lock

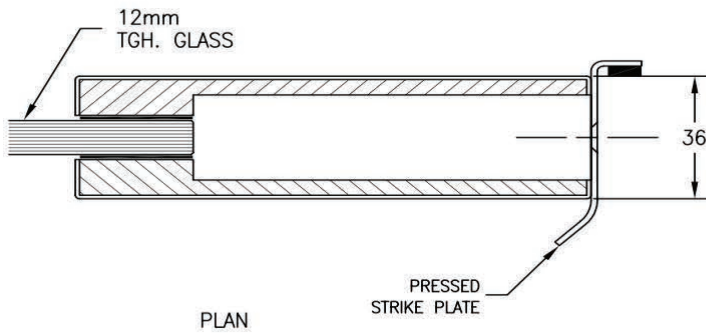


NON HANDED

Doors are handed from outside view and pivot side.

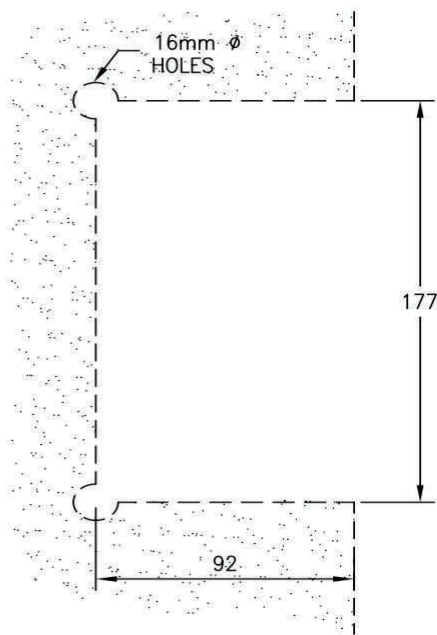

GLASS PREPARATION

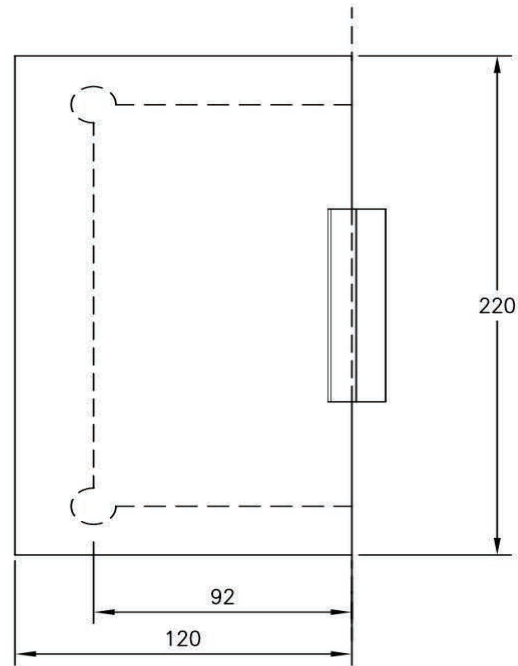

ELEVATION


AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

TECHNICAL DETAILS



- ON-EAZI side fix patch keeper to suit CD1050, CD1050E and CD1050F with door lock (ST9601 or ST9602)
- Note: This patch fitting is used generally on pairs of doors to match patch lock
- Specify glass thickness 10, 12 or 15mm

1051K Patch Lock



NON HANDED

Doors are handed from outside view and pivot side.

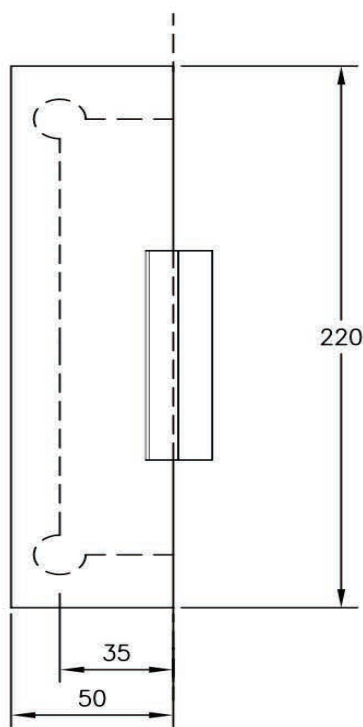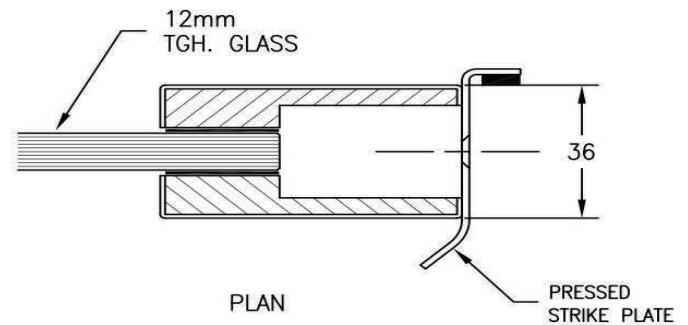

ELEVATION



GLASS PREPARATION



AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

TECHNICAL DETAILS



- ON-EAZI side fix patch keeper to suit CD1050, CD1050E and CD1050F with door lock (ST9601 or ST9602)
- Note: This patch fitting is used generally on side panels
- Specify glass thickness 10, 12 or 15mm

CD1050KE Patch Lock

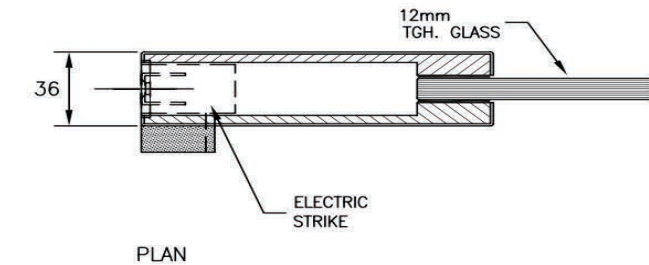

Note: state open in or open out at the time of order

Doors are handed from outside view and pivot side.

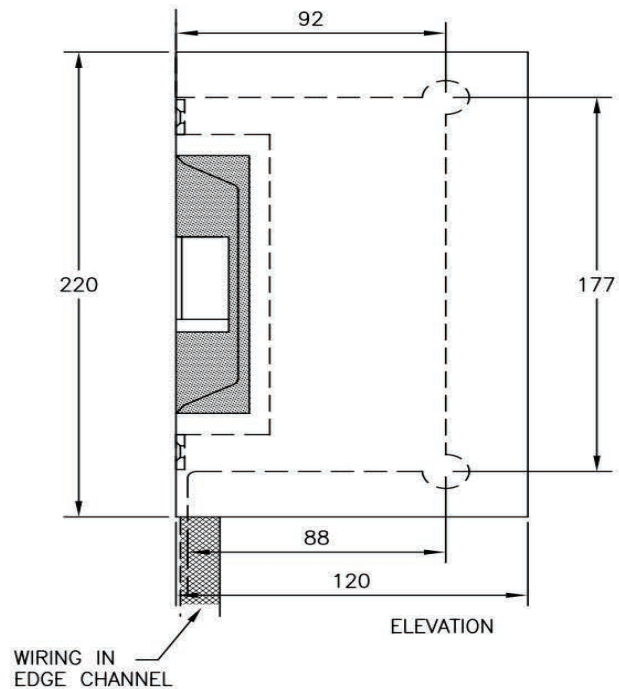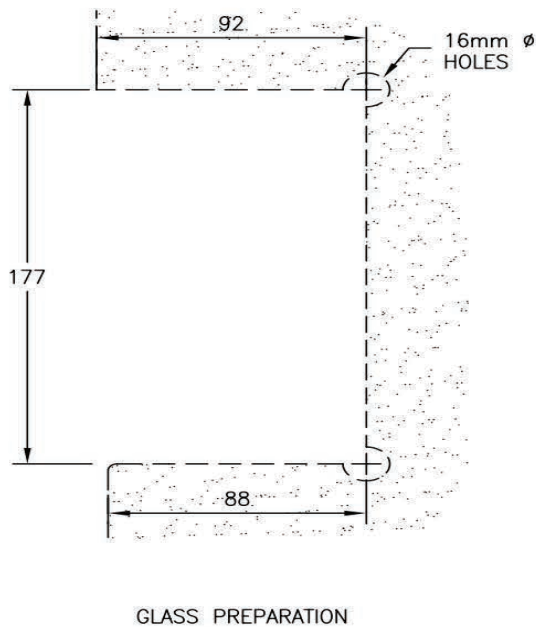


AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

TECHNICAL DETAILS

- ON-EAZI side fix electric strike patch keeper to suit CD1050, CD1050E and CD1050F, incorporating FSH FES20M electric strike
- Note: Wiring possibilities include surface pipe, edge channel or horizontal silicone joint
- Note: wiring by edge channel indicated on drawing
- Specify glass thickness 10, 12 or 15mm
- Specify hand of door




CD1051KE Patch Lock



NON HANDED

Note: state open in or open out at the time of order

Doors are handed from outside view and pivot side.

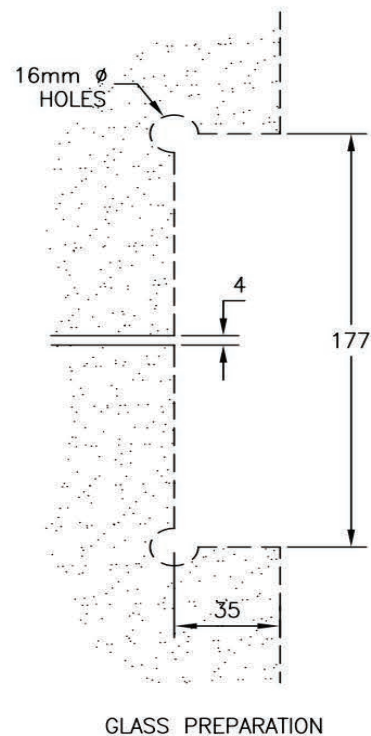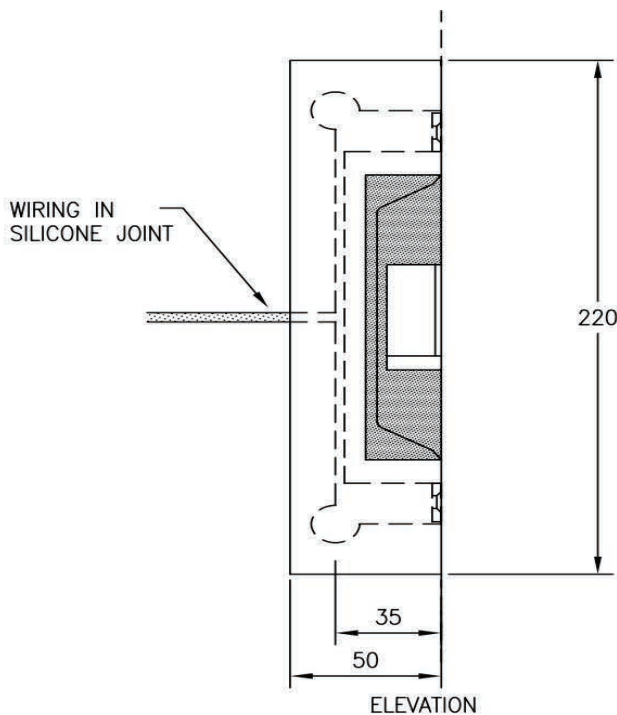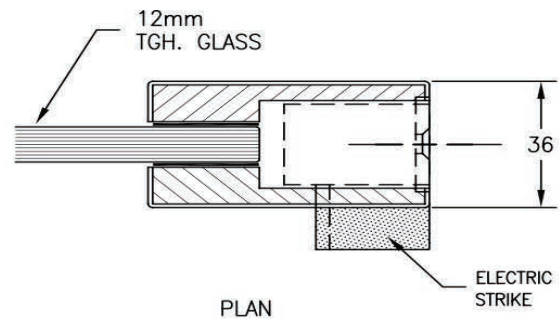


AVAILABLE FINISHES


- Aluminium: Mill, SAA
- Stainless: SSS, PSS

TECHNICAL DETAILS


- ON-EAZI side fix electric strike patch keeper to suit CD1050, CD1050E and CD1050F, incorporating FSH FES20M electric strike
- Note: Wiring possibilities include surface pipe, edge channel or horizontal silicone joint
- Note: wiring in silicone joint indicated on drawing
- Specify glass thickness 10, 12 or 15mm
- Specify hand of door

AL8700A-49 Magnetic Door Lock Satin Anodised


LH DRAWN
Doors are handed from
outside view and pivot side

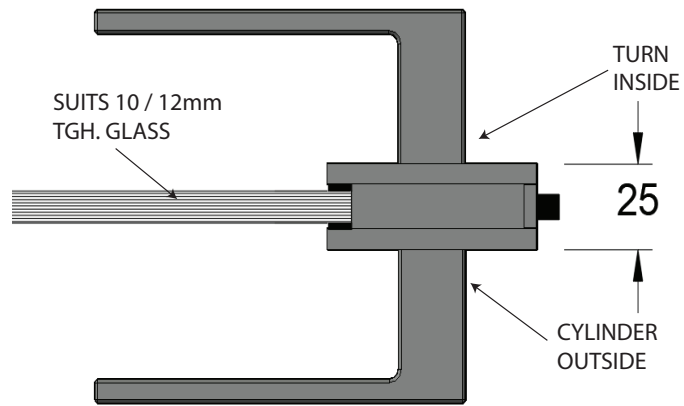

PLAN

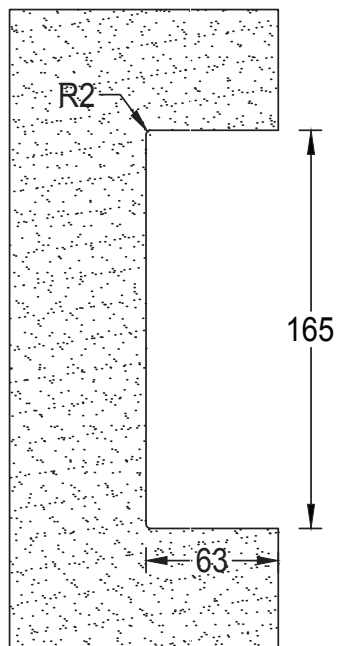

GLASS PREPARATION

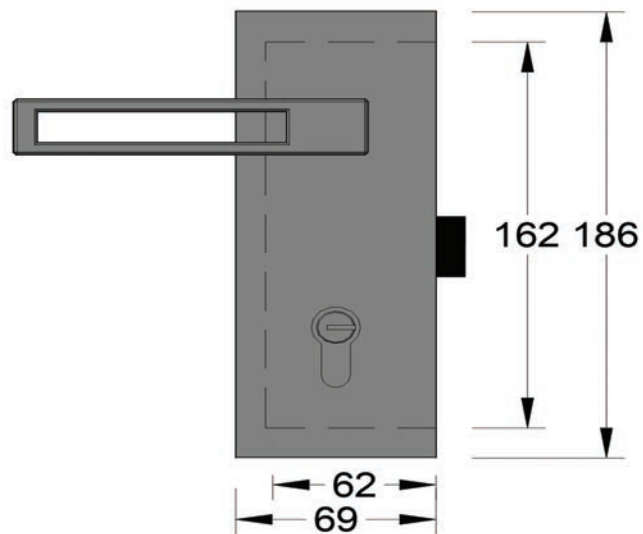

ELEVATION


AVAILABLE FINISHES

- Anodised Satin Stainless

TECHNICAL DETAILS

- Aluminium
- 10 mm or 12 mm Glass

AL8700A-49B Magnetic Lock Keeper Satin Anodised

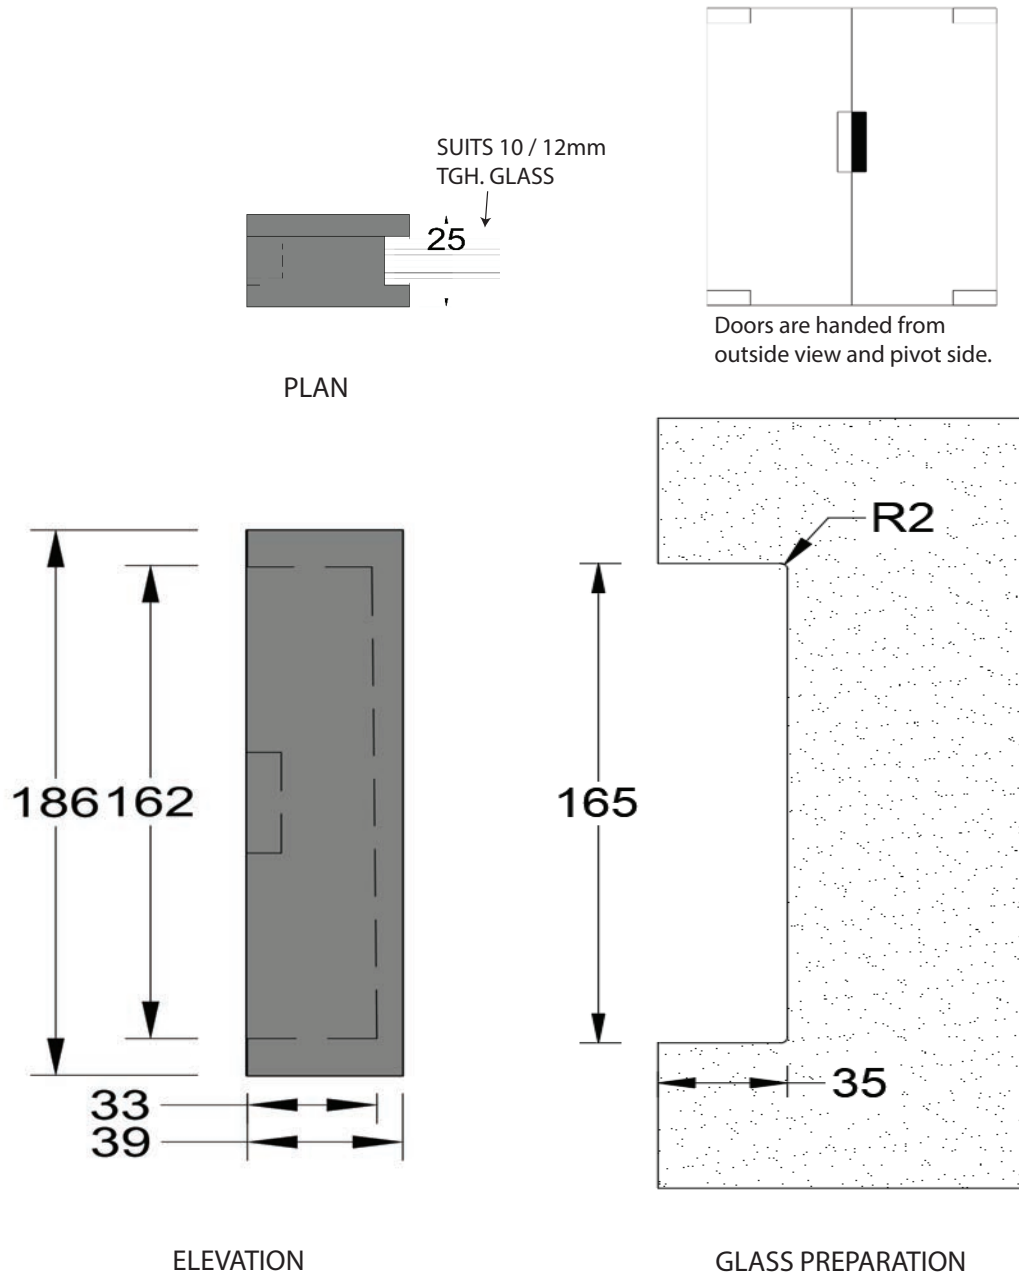


AVAILABLE FINISHES

- Anodised Satin Stainless

TECHNICAL DETAILS

- Aluminium
- 10 mm or 12 mm Glass

AL8700A-49D Magnetic Wall Mount Keeper

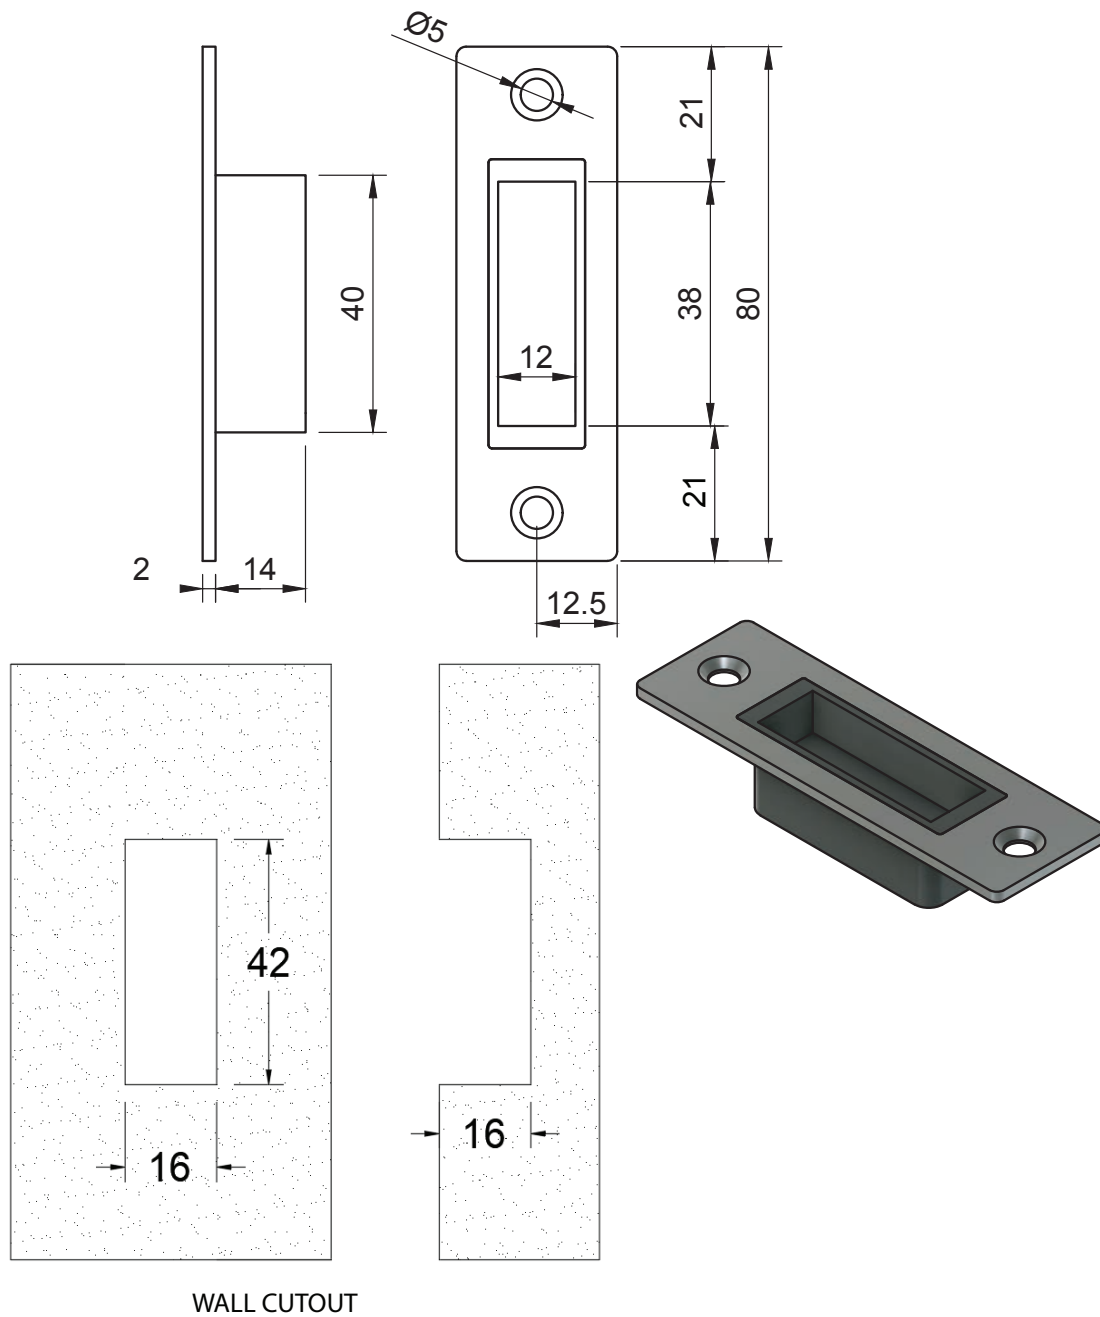



AVAILABLE FINISHES

- Anodised Satin Stainless


TECHNICAL DETAILS

- Aluminium
- 10 mm or 12 mm Glass


CD353 / CD353C / CD353C/S Patch Lock

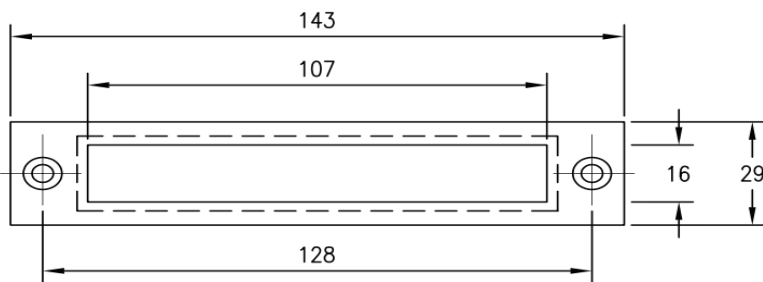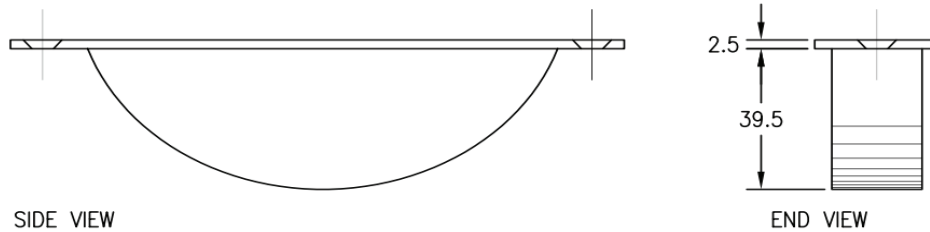



CD 353
LOCK TROUGH

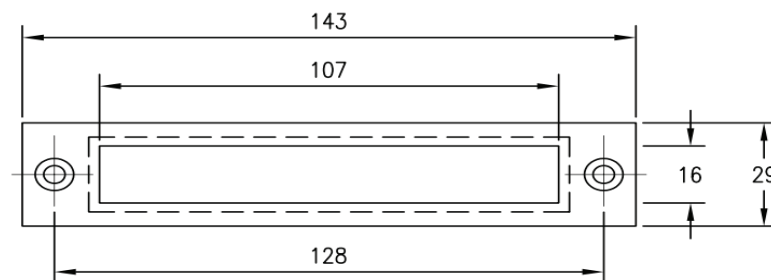

CD 353C
PLAN, FOR SWING DOOR



CD 353C/S
PLAN, FOR SLIDING DOOR

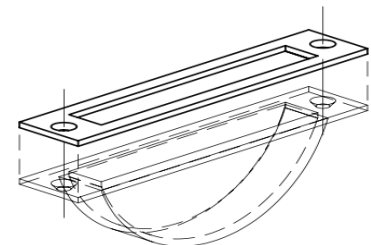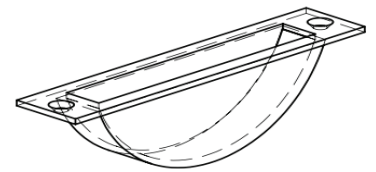

AVAILABLE FINISHES

- Stainless: SSS, PSS





TECHNICAL DETAILS

- CD353: Cast lock trough floor keeper to suit DC590 long throw dead lock, finished in SCP
- CD353C: Lock trough cover plate to provide special finishes for CD353 lock trough
- CD353C/S: Lock trough cover plate to provide restricted trough opening for sliding door application

KEEPERS


CD 60

TOP HAT KEEPER

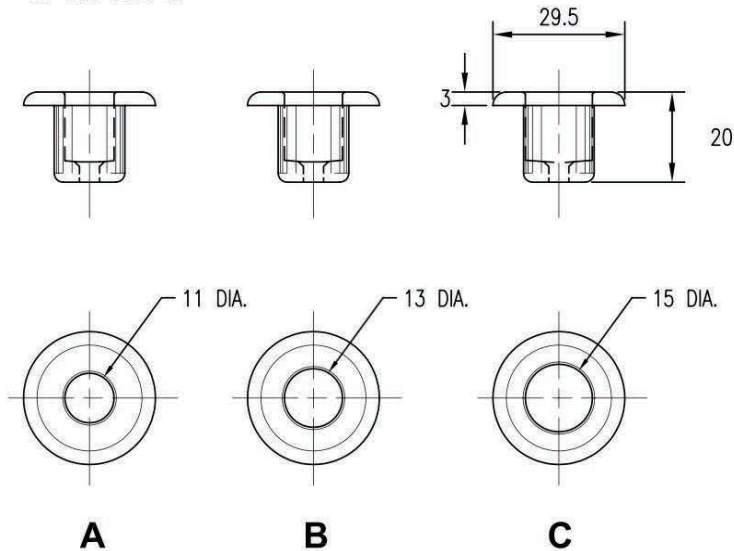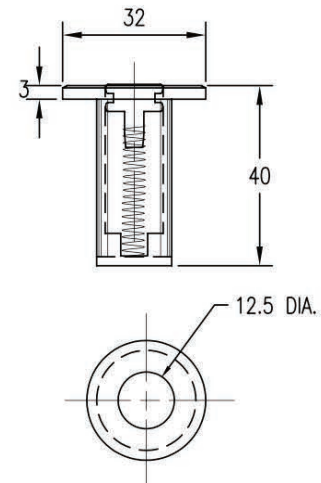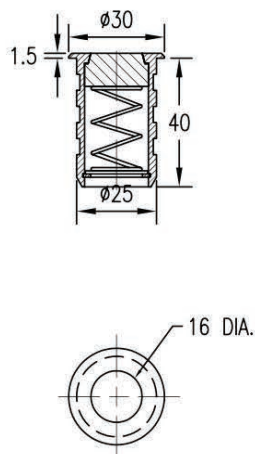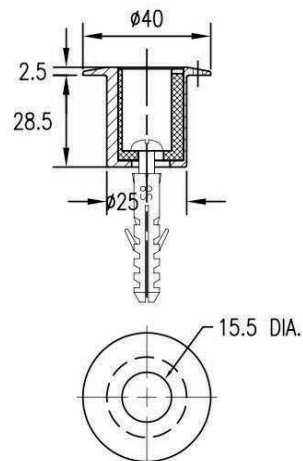
**CD 60S**TOP HAT KEEPER
WITH DUST COVER**H80519300099**TOP HAT KEEPER WITH
SPRING LOADED COVER**M05.194**UNIVERSAL ECCENTRIC
BUSH KEEPER**AVAILABLE FINISHES**

- CD60 - Aluminium: Mill, SAA
- CD60S - Brass: SCP
- M05.193 - Aluminium: SAA
- M05.194 - Stainless: SSS


48700 Corner Lock

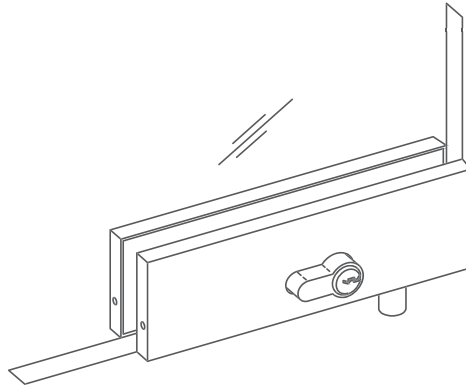

DETAIL

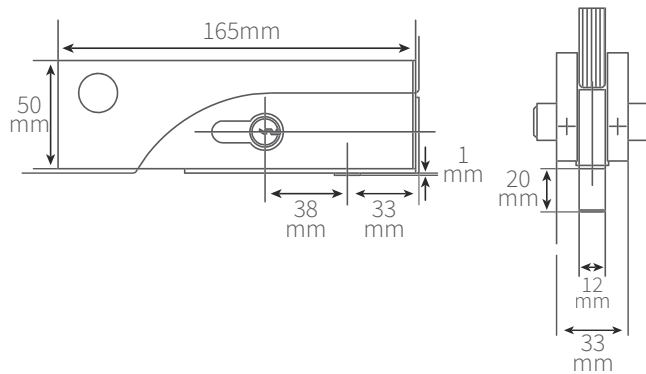

INSITU APPLICATION

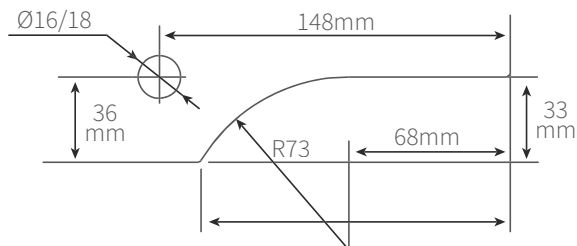


AVAILABLE FINISHES

- Satin silver anodised
- Polished stainless steel
- Satin stainless steel
- Polished brass

TECHNICAL DETAILS

- Corner pin lock – CASMA
- Maximum glass hold 150kg
- Recommended torque for fixing screws Nm 14-16
- Euro style cylinder

14600 /14700 Internal cylinder / snib lock

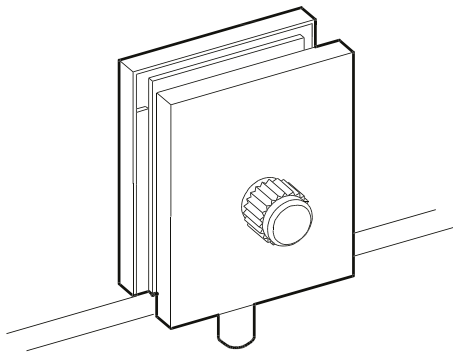





AVAILABLE FINISHES

- Polished stainless steel
- Satin stainless steel




TECHNICAL DETAILS

- Bottom pin lock with thumbturn (14700) or lock (14600)
- Internal single snib lock
- Maximum glass hold 90kg


DETAIL

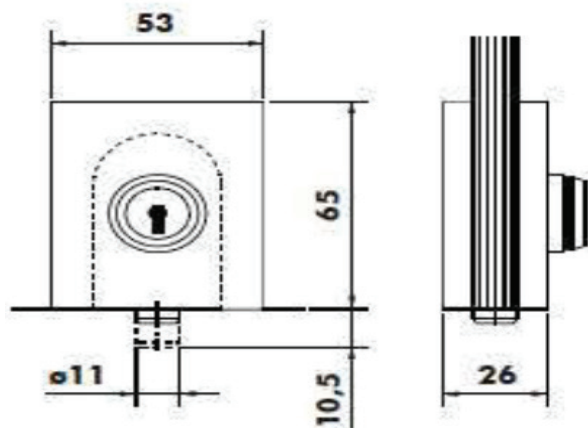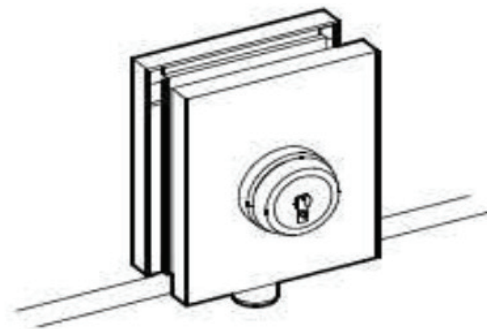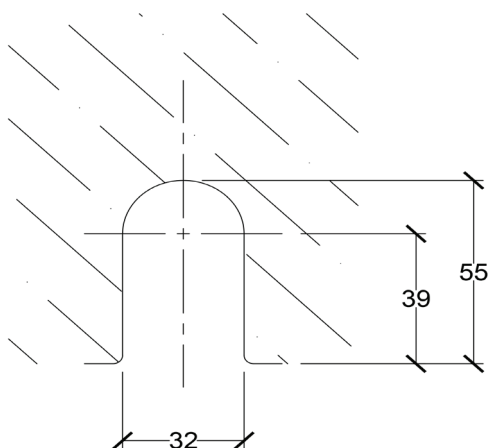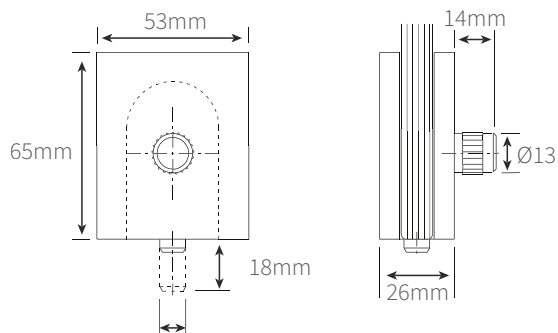

15501 / 15502 Floor Ferule

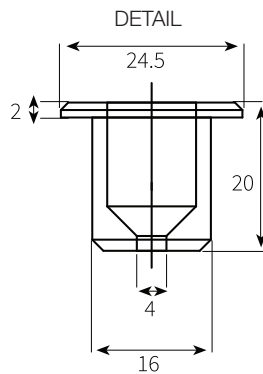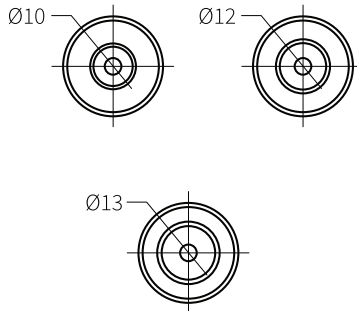

INSITU APPLICATION




AVAILABLE FINISHES

- Natural anodised

TECHNICAL DETAILS

- To be used in flooring or structure with pin locks
- Use with 10, 12 and 13 diameter pin style locks in show cases

15519 Floor Ferule Elongated Hole




DETAIL

AVAILABLE FINISHES

- Satin stainless steel

TECHNICAL DETAILS

- To be used in flooring or structure with pin locks
- Elongated hole for adjustment with lock on site
- Suitable for eurostyle pin locks in floor

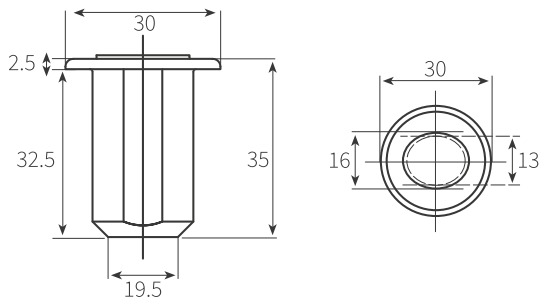

INSITU APPLICATION

