Milano Folding Door System

The edge hung Milano folding door system incorporates elegantly crafted cast stainless steel fittings

Rollers mounted at the glass corners allow the panels to fold clear of one end and be stacked either inside or outside of the room. Designed for glass panel thickness of 8/10/12mm with a gap between the glass panels of less than 3mm. Several different handle and locking arrangements are available for various layouts. We would be pleased to discuss these with you.

LS-13-CC Milano Stainless Steel Sliding Door Lock






AVAILABLE FINISHES


Satin stainless steel



DT-215 Milano Stainless Steel Floor Guide







AVAILABLE FINISHES

Satin stainless steel

TECHNICAL DETAILS

- Rollers mounted at the glass corners allow the panels to fold clear of one end and be stacked either inside or outside of the room
- Designed for glass panel thickness' of 8mm, 10mm or 12mm with a gap between the glass panels of less than 3mm
- Several different handle and locking arrangements are available

Specify glass thickness when ordering

DF-216



AVAILABLE FINISHES

Satin stainless steel

TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Top track stock length 4m with a clear anodised finish as standard
- Bottom track is 4m pressed stainless steel with satin finish
- All glass is to be monolithic and fully toughened in accordance with AS 2208

Specify glass thickness when ordering

DF-206



AVAILABLE FINISHES

Satin stainless steel

TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Top track stock length 4m with a clear anodised finish as standard
- Bottom track is 4m pressed stainless steel with satin finish
- All glass is to be monolithic and fully toughened in accordance with AS 2208

Specify glass thickness when ordering



FOLDING DOOR SYSTEM

DF-210





AVAILABLE FINISHES

• Satin stainless steel


TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Top track stock length 4m with a clear anodised finish as standard
- Bottom track is 4m pressed stainless steel with satin finish
- All glass is to be monolithic and fully toughened in accordance with AS 2208

Specify glass thickness when ordering

DF-211





AVAILABLE FINISHES

Satin stainless steel


TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Top track stock length 4m with a clear anodised finish as standard
- Bottom track is 4m pressed stainless steel with satin finish
- All glass is to be monolithic and fully toughened in accordance with AS 2208

Specify glass thickness when ordering

DF-217





AVAILABLE FINISHES

• Satin stainless steel

TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Top track stock length 4m with a clear anodised finish as standard
- Bottom track is 4m pressed stainless steel with satin finish
- All glass is to be monolithic and fully toughened in accordance with AS 2208

Specify glass thickness when ordering



DF-213



AVAILABLE FINISHES

• Satin stainless steel

TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Top track stock length 4m with a clear anodised finish as standard
- Bottom track is 4m pressed stainless steel with satin finish
- All glass is to be monolithic and fully toughened in accordance with AS 2208

Specify glass thickness when ordering

DF-212





AVAILABLE FINISHES

Satin stainless steel


TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Top track stock length 4m with a clear anodised finish as standard
- Bottom track is 4m pressed stainless steel with satin finish
- All glass is to be monolithic and fully toughened in accordance with AS 2208

Specify glass thickness when ordering

DF-214





AVAILABLE FINISHES

Satin stainless steel


TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Top track stock length 4m with a clear anodised finish as standard
- Bottom track is 4m pressed stainless steel with satin finish
- All glass is to be monolithic and fully toughened in accordance with AS 2208

Specify glass thickness when ordering



Napoli Folding Door System

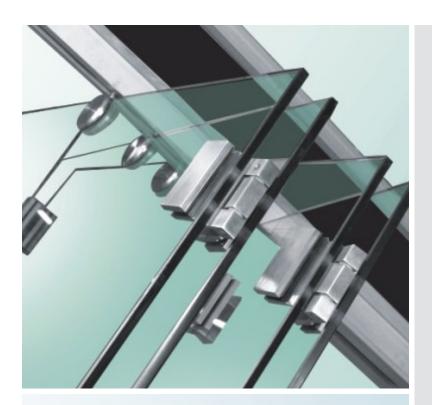



Perfect design and elegant style


Panels of NAPOLI series of movable glass partitions can form a continuous transparent partition without the requirement for any frame. Rollers mounted at the top centre of the glass panels provide balanced support, and together with the screw fixed hinges in the first panel, eliminate the requirement for a bottom guide track.

Hinges are mounted onto the glass with no visible fixings providing a sleek and stylish appearance.

Overhead track can be either surface mounted or recessed into the ceiling.



Napoli Folding Door System Diagram

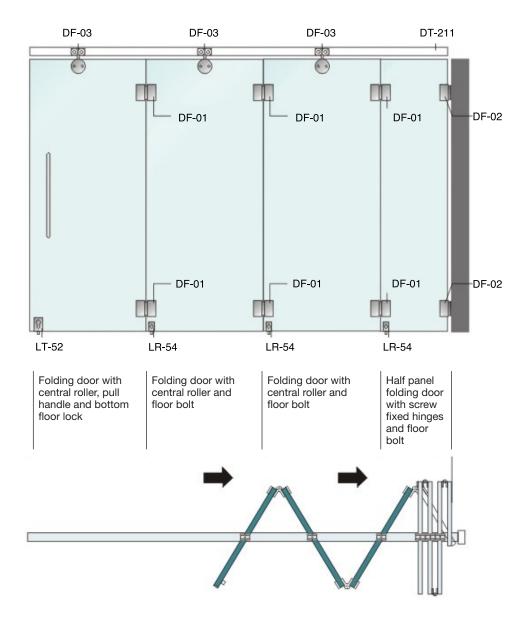

FOLDING DOOR SYSTEM

DT-211



AVAILABLE FINISHES

Satin stainless steel

Specify glass thickness when ordering

TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Handles to be ordered separately
- Top track stock length 4m with a clear anodised finish as standard
- All glass is to be monolithic and fully toughened in accordance with AS 2208

DF-03



AVAILABLE FINISHES

Satin stainless steel

Specify glass thickness when ordering

TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Handles to be ordered separately
- Top track stock length 4m with a clear anodised finish as standard
- All glass is to be monolithic and fully toughened in accordance with AS 2208

DF-01



AVAILABLE FINISHES

Satin stainless steel

Specify glass thickness when ordering

TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Handles to be ordered separately
- Top track stock length 4m with a clear anodised finish as standard
- All glass is to be monolithic and fully toughened in accordance with AS 2208

DF-02



AVAILABLE FINISHES

Satin stainless steel

Specify glass thickness when ordering

TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Handles to be ordered separately
- Top track stock length 4m with a clear anodised finish as standard
- All glass is to be monolithic and fully toughened in accordance with AS 2208



DLT-52



AVAILABLE FINISHES

Satin stainless steel

Specify glass thickness when ordering

TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Handles to be ordered separately
- Top track stock length 4m with a clear anodised finish as standard
- All glass is to be monolithic and fully toughened in accordance with AS 2208

DLT-54



AVAILABLE FINISHES

Satin stainless steel

Specify glass thickness when ordering

TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Handles to be ordered separately
- Top track stock length 4m with a clear anodised finish as standard
- All glass is to be monolithic and fully toughened in accordance with AS 2208

AK-100



AVAILABLE FINISHES

Satin stainless steel

Specify glass thickness when ordering

TECHNICAL DETAILS

- Available either as a 4 or 5 panel kit, or individual components
- Handles to be ordered separately
- Top track stock length 4m with a clear anodised finish as standard
- All glass is to be monolithic and fully toughened in accordance with AS 2208



8900B Stacking Door System






DOORS MOVE SEPERATLY GLIDE SMOOTHLY



8900B Stacking Door System

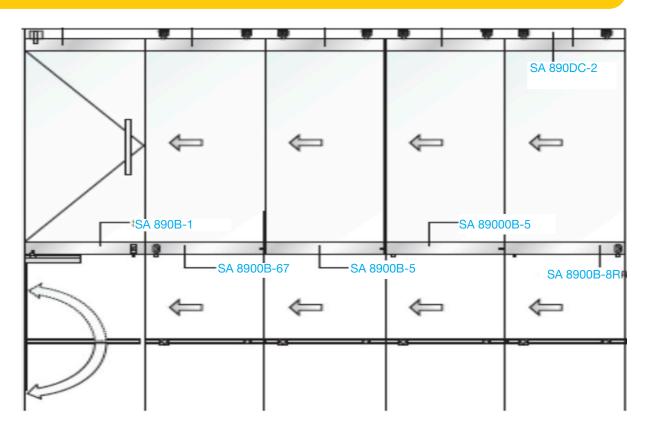


Upper and lower door clips are provided at the end foor leaf, in match of the floor- spring driven double- acting door, not movable	Movable door leaf, movable door hanging pully and bottom bolt	Movable door leaf, movable door hanging pully and bottom bolt	Movable door leaf, movable door hanging pully and bottom bolt	Movable door leaf, movable door hanging pully and bottom bolt
3500mm	3500mm	3500mm	3500mm	3500mm
1000mm	1000mm	1000mm	1000mm	1000mm
120kg	120kg	120kg	120kg	120kg






8900B Components

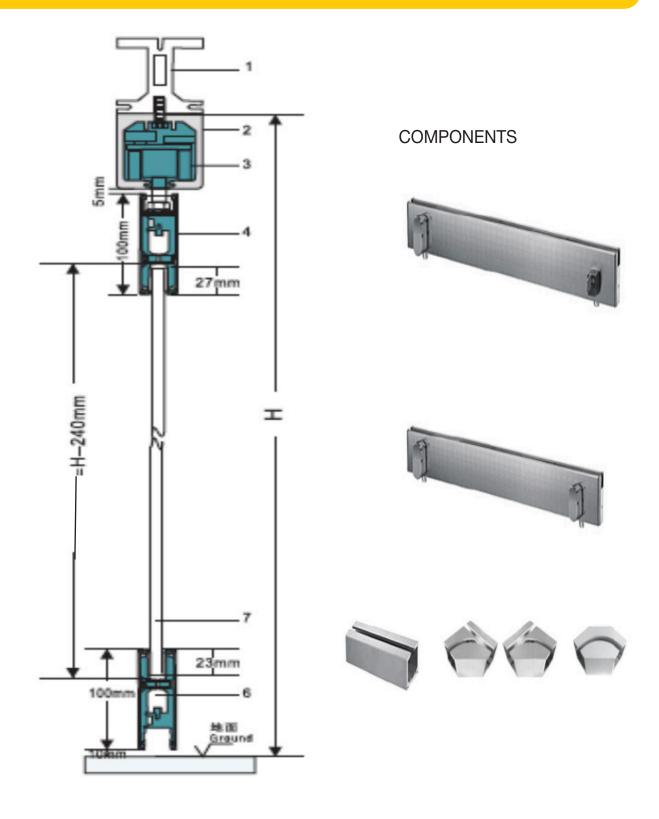



8900W Bifold Door System




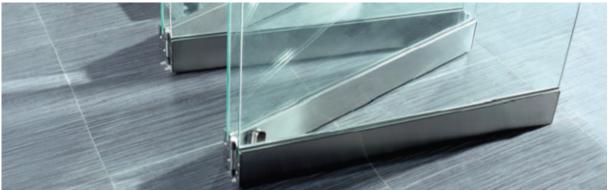



USE OPENING DOORS
AND BIFOLDING
TOGETHER CAN COMBINE
AND BIFOLD BOTH LEFT
AND RIGHT OPENING

8900W Bifold Door System

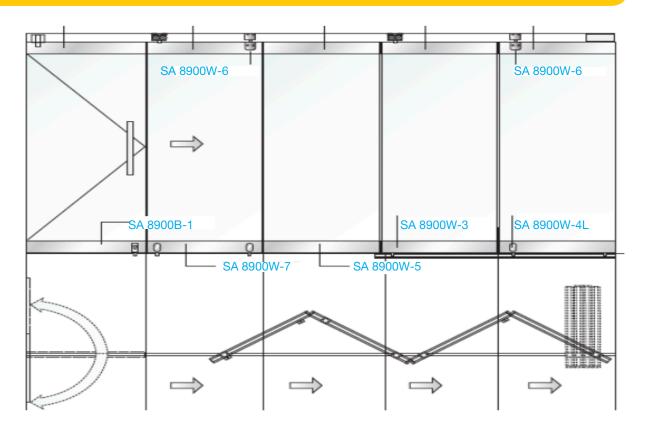

End door leaf,
equipped with upper
and lower fixing door
strips, matching floor
spring, double-acting
type, non-folding

Folding door leaf,
folding door hanging
pulley and bottom bolt

Upper and lower folding door leafs

Folding door leaf, folding door hanging pulley and bottom bolt Beginning door leaf, quipped with upper and lower fixing door strips and bottom bolt

3000mm	3000mm	3000mm	3000mm	3000mm
1000mm	1000mm	1000mm	1000mm	1000mm
90kg	90kg	90kg	90kg	90kg



8900Z Using 1/2 Panels to Have Complete Opening






Simple and Easy

Folding glass partition panels are of streamlined design without any obstruction therein; in addition, the glass curtain walls are more transparent; both upper and lower door strips are connected into integrity, to ensure stability and smoothness; easy operation ensures only one person completes the whole partitioning process, satisfactory for the partitioning of various spaces and shops.



8900Z Bifold Door System

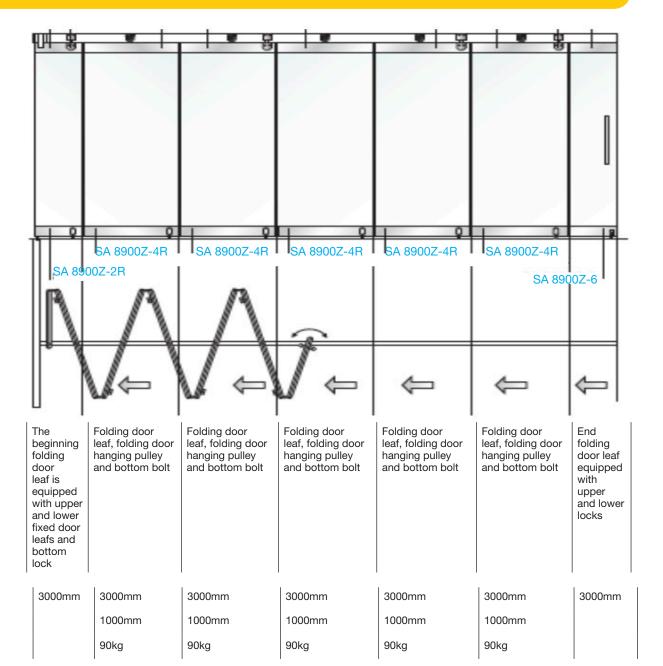







ALSO AVAILABLE USING PATCH FITTINGS - 8900A



8300H Bottom Sliding Door System



8300H Patch Fittings



8300H.1 - ROLLERS



8300H.3 - TOP TRACK



8300H.2 - TRACK



8300H.5 - STOP



SK90 - HANDLE



8300H.4 - CLAMP



8300H.6 - END CAPS

40 Series Sliding Door



The 40 series range of sliding doors provides a comprehensive range of aluminium overhead tracks and roller types to suit most sliding doors including glass, wood and aluminium.





40-4 Sliding Track




The 40-4 track is designed for surface mounting to a wall and features a curved snap on cover to conceal the mounting screw holes.

A small selection of roller types, locks and handles is shown here. For further options and information please contact the sales team.




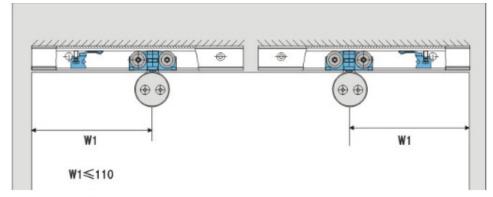


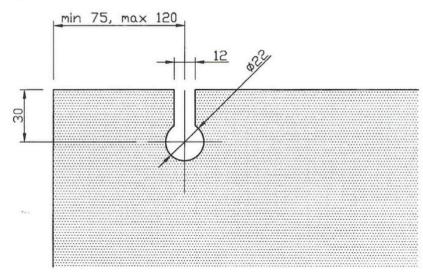

GHAFFSD Face Fix Sliding Door



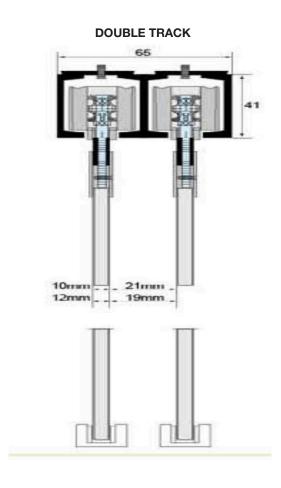

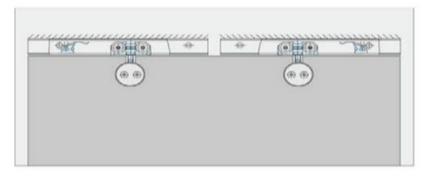





Fittings							
			GLASS CLEARANCES DT-101, 102, 103 DT-104 Top of glass to u/s track Top of glass to u/s track				
CODE		NOTES	NOMINAL GAP		NOMINAL GAP	MAX/MIN GAP	DETAILS
SA-102		End cap for DT-101					
SA-103		Internal stop for all tracks					
SA-104R		End cap for DT-104					
SA-104L		End cap for DT-104					
SA-105	0	Bracket for mounting track DT-101, 102, 103 to wall					
SA-106-CH		Countersunk bracket for mounting all tracks to fixed glass panel					
SA-106-RH		Round head bracket for mounting all tracks to fixed glass panel					
SA-114		Internal 90 degree connection bracket for all tracks					
SA-115		Internal bracket to mount track to wall					
SG-01	6	Floor guide adjustable for 8, 10, 12, 15mm thick glass	10mm	Min 6.5mm Max 16mm	10mm	Min 6.5mm Max 16mm	22mm High 31mm Wide 44mm Long



Tracks			
CODE		NOTES	DETAILS
DT-101		Over head mounted	41mm High 38mm Wide
DT-102	4	Over head mounted double track	41mm high 65mm wide Roller centrelines 31mm
DT-103		Over head mounted side glazing pocket	41mm high 50mm wide Glazing pocket 13.9mm wide
DT-104	n	Wall mounted pre-drilled holes clip on cover	58mm high 48mm wide

Handles / Finger Pulls								
CODE		NOTES	DETAILS					
SH-16		Solid cast handle	73mm High 25mm Wide 33 proud from glass					
SH-17		Solid cast handle	165mm High 24mm Wide 17 proud from glass					
SH-19SQ		Cast square finger pull handle	50mm High 50mm Wide 12 proud from glass					
SH-101		Cast finger pull handle	58mm Diameter 9 proud from glass					



Clamp

Series 220 Sliding Track System									
CODE		DOOR WEIGHT							
SW-222		300kg							
SW-223		400kg							
DT-221		Track Height 49.5mm Width 57.71mm							
A01 Glazing		Patch Height 115mm							

CODE LS-13 LS-13k LS-14k LS-15k



Width 70mm

Sliding Door Locks (Cont'd)							
CODE							
LS-20							
LS-21							
LS-56							
LS-56k							
LS-57							
LS-57k							
LS-58							
LS-58k							



Roller and clamping sets

			GLASS CLEARANCES				
			DT-101, 102, 103 Top of glass to u/s track		DT-104 ack Top of glass to u/s track		
CODE		NOTES	NOMINAL GAP	MAX/MIN GAP	NOMINAL GAP	MAX/MIN GAP	DETAILS
SR-100101-SS			5mm	Min 1mm Max 16mm Can use longer threaded rod	5mm	Min 1mm Max 10mm Can use longer threaded rod	90kg / Door Leaf (2 roller sets)
SR-101102			TBC	No adjustment	TBC	No adjustment	90kg / Door Leaf (2 roller sets)
SR-100103	10	Mounting of aluminium or timber doors / panels	17mm	Min 15mm Max 19mm Can use longer threaded rod	Standard bolt not suited can use longer hex bolt	Standard bolt not suited can use longer hex bolt	90kg / Door Leaf (2 roller sets)
SR-102104	6.0)		5mm	Min 1mm Max 16mm Can use longer threaded rod	5mm	Min 1mm Max 10mm Can use longer threaded rod	90kg / Door Leaf (2 roller sets)
SR-102105	10		40mm	Min 34mm Max 53mm Can use longer threaded rod	40mm	Min 34mm Max 45mm Can use longer threaded rod	90kg / Door Leaf (2 roller sets)
SR-100114			27mm	Min 22mm Max 32mm Can use longer threaded rod	24mm	Min 24mm Max 24mm Can use longer threaded rod	90kg / Door Leaf (2 roller sets)

GHA-L10 Sliding Door Wall and Glass Mounts



WALL MOUNT KIT


- 2 x rollers
- 2 x wall mounts
- 2 x stoppers
- 2 x end rod supports
- 1 x floor guide


GLASS MOUNT KIT


- 2 x rollers
- 2 x glass mounts
- 2 x stoppers
- 2 x end rod supports
- 1 x floor guide




L10 Sliding Glass Door System









SLIDO Soft Close Sliding Door




AVAILABLE FINISHES


Clear anodised

TECHNICAL DETAILS


- 8 or 10mm thick toughened glass
- Glass clamped (no holes)
- Up to 120kg per door

Ceiling installation and wall mounting










Ceiling installation with double running track and clip panel 90 mm





Section guide and trolley hanger





SLIDO

Classic	А	В	С	D	Е	
40-L	940.43.090	940.43.091	940.43.092	940.43.093	940.43.094	
80-L	940.82.140	940.82.141	940.82.142	940.82.143	940.82.144	
120-L	941.25.000	941.25.001			941.25.004	

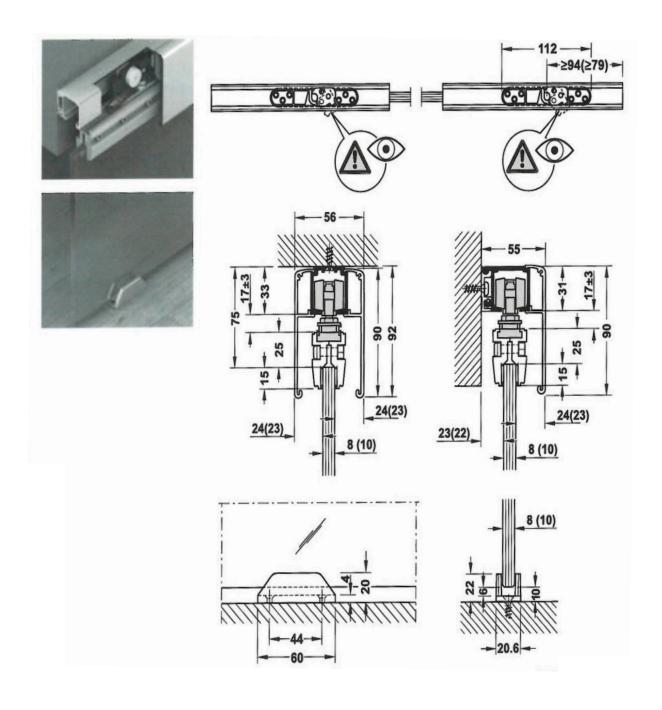


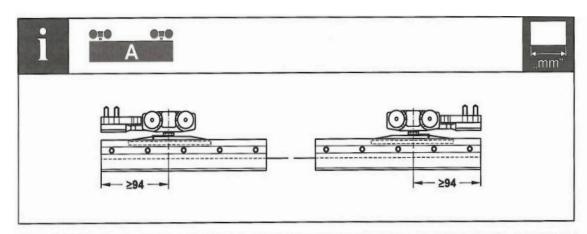


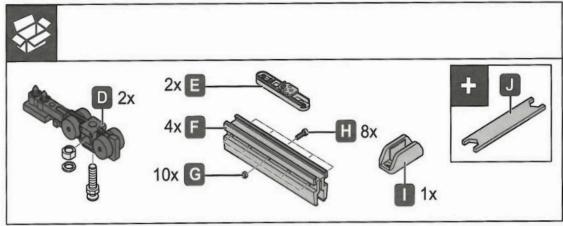


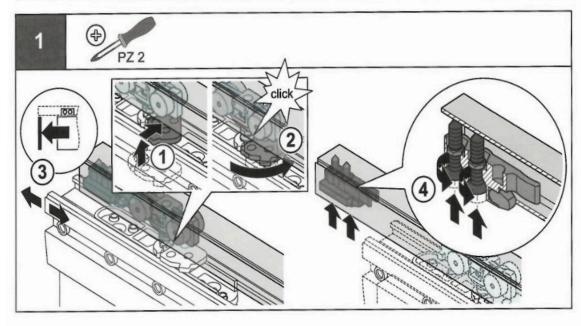





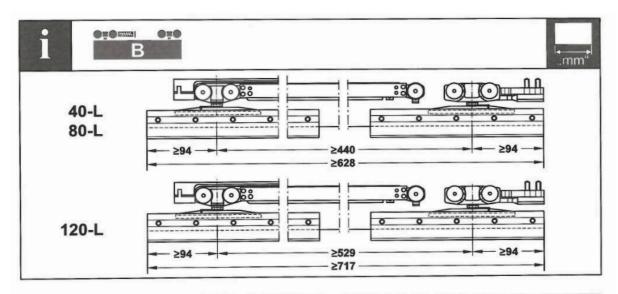


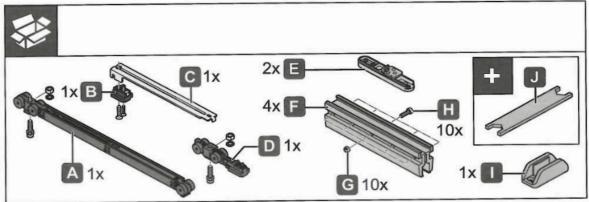

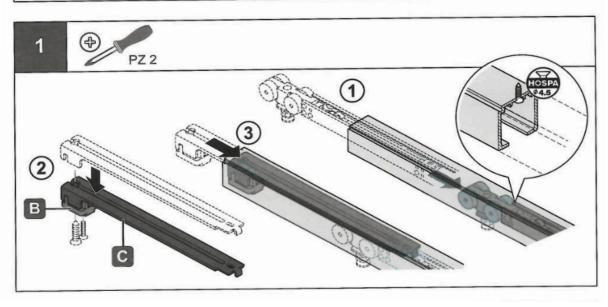


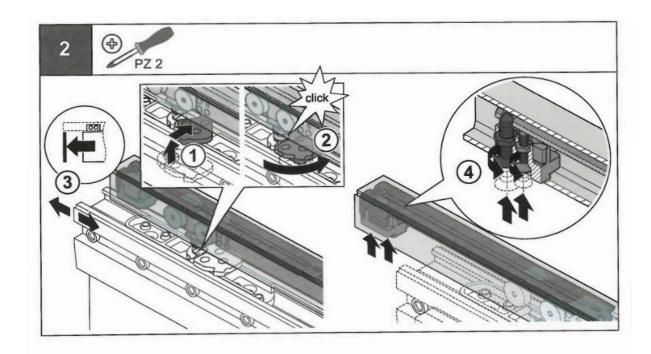


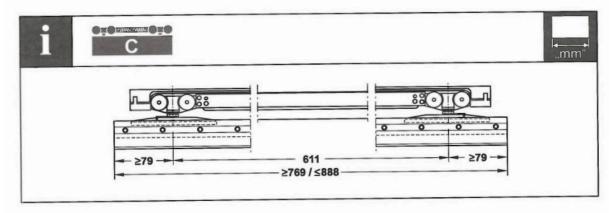

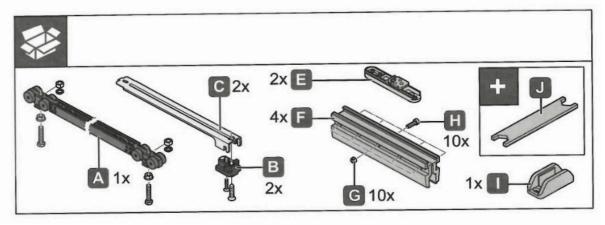





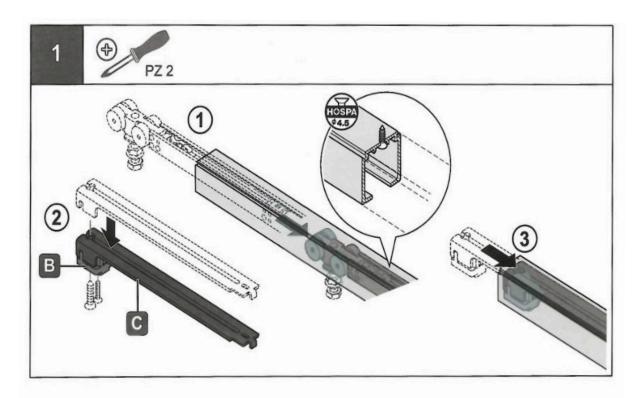


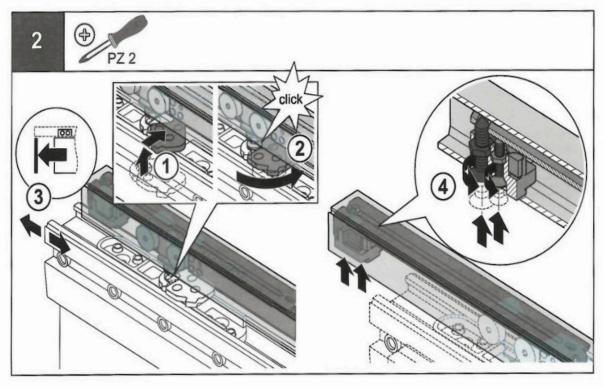




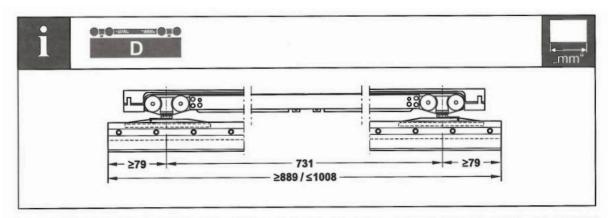


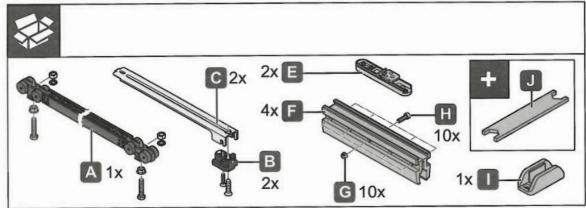


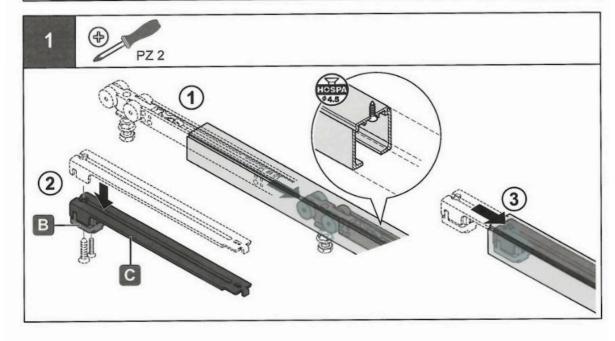





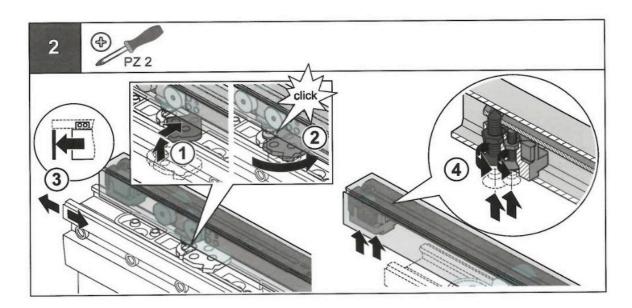


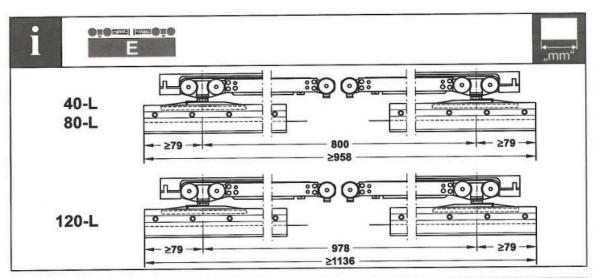

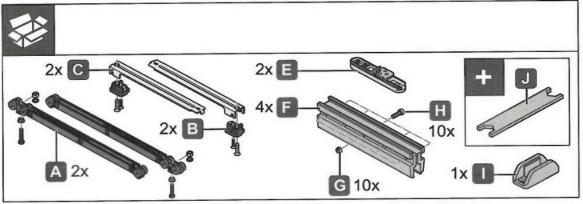

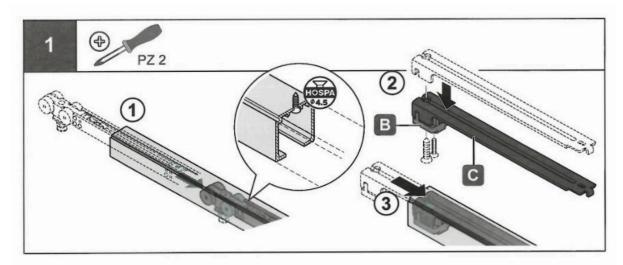

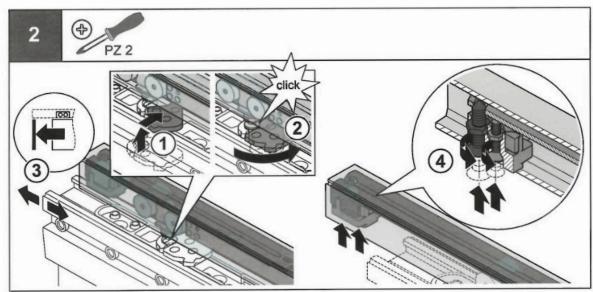

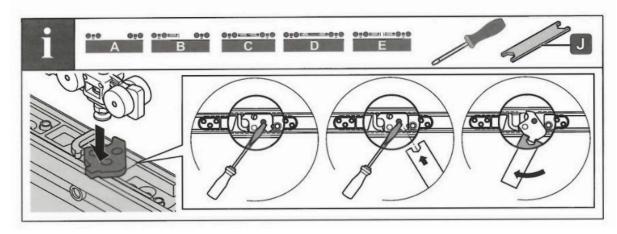




GHA8600I-A



GHA8600I-A Installation Instructions - Single Door Structure

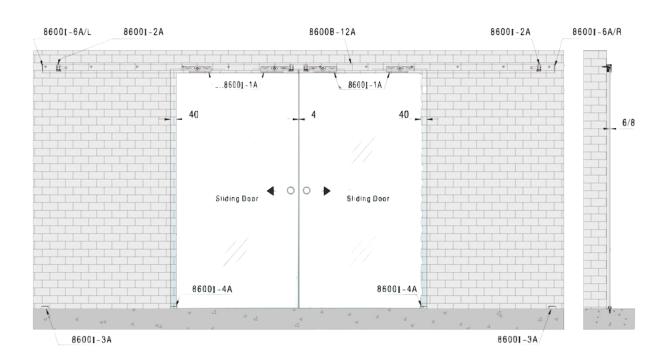

GHA8600I-A Installation




GHA8699I-B





GHA8600I-B Installation Instructions - Single Door Structure

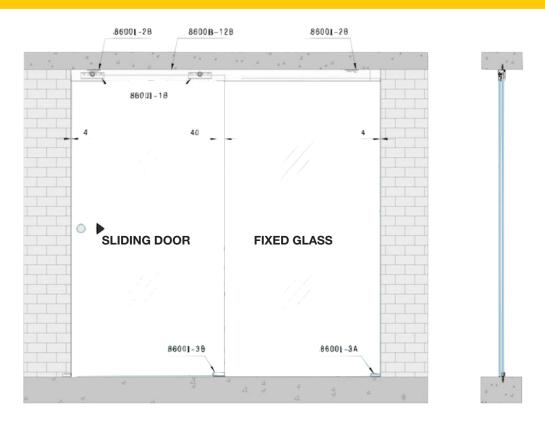


GHA8600I-B Installation







GHA8600E-1

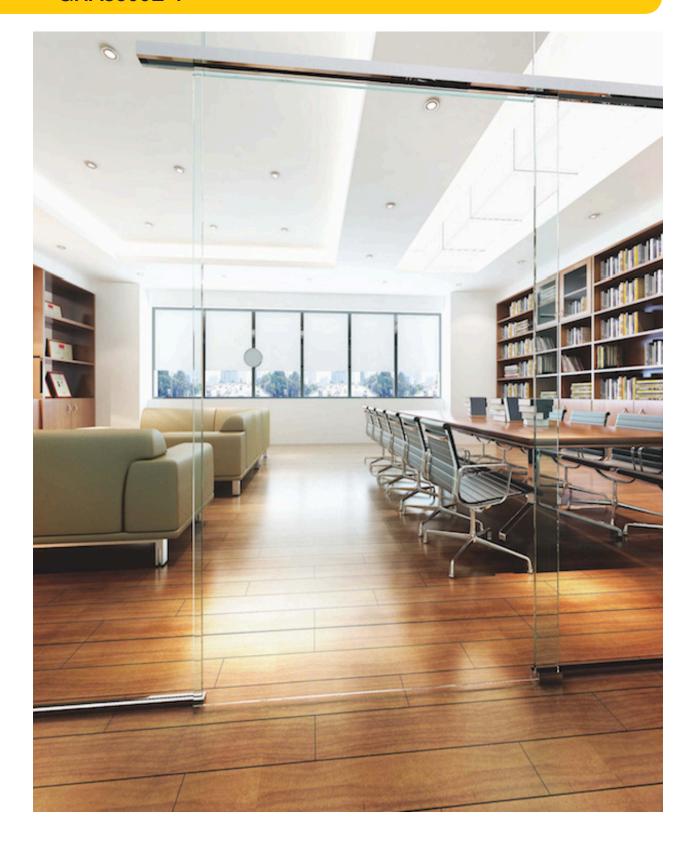



GHA8600E-1 Installation Instructions - Single Door Structure

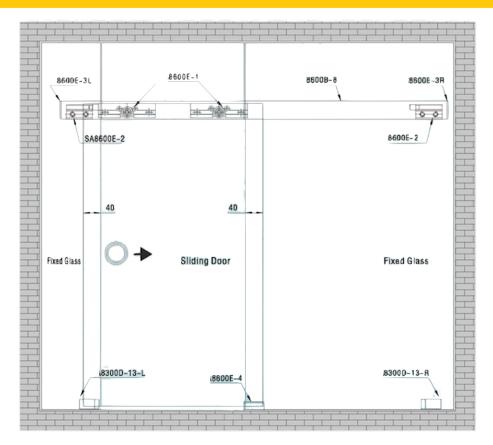



GHA8600E-1 Installation











GHA8600E-1 (2PCS)

GHA8600E-2 (2PCS)

GHA8600E-3L (1PC)

GHA8600E-3R (1PC)

GHA8600E-4 (1PC)











GHA8600E-5 (2PCS)

GHA8600E-6 (7PCS)


GHA8600B-8 (1PCS)

GHA8600B-9 (1PC)


GHA8300D-12L/R (1PC)



GHA8600I-A

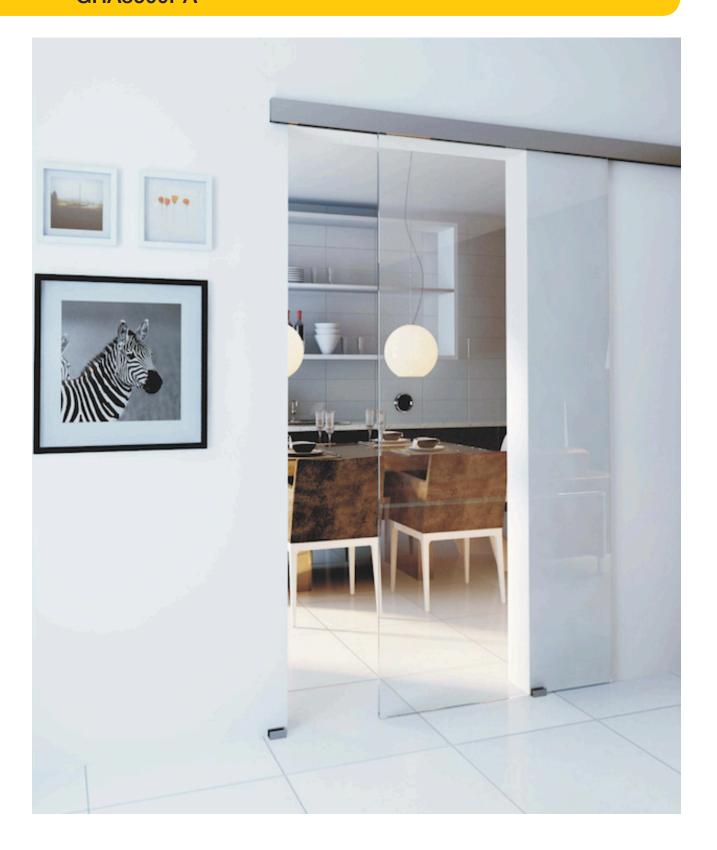

GHA8600I-A Installation Instructions - Single Door Structure

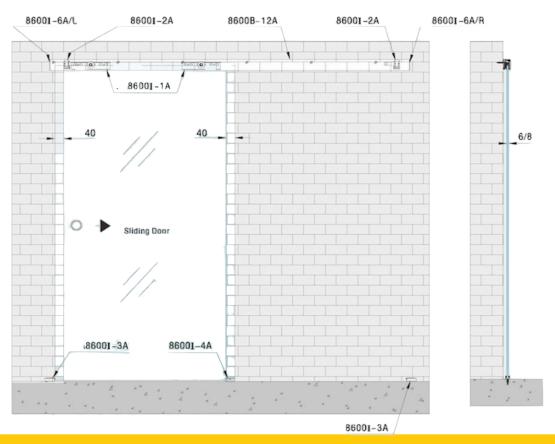

GHA8600I-A Installation Instructions - Single Door Structure



GHA8700








SLIDING DOOR SYSTEM

GHA8700A-4A Frame Mounted Glass Door Hinge








GHA8700A-4B Frame Mounted Glass Door Hinge









GHA8700A-4C Frame Mounted Glass Door Hinge








GHA8700A-4D Frame Mounted Glass Door Hinge












GHA8600B-14 Track to Wall Bracket

DIMENSIONS IN MM/SPECIFICATION

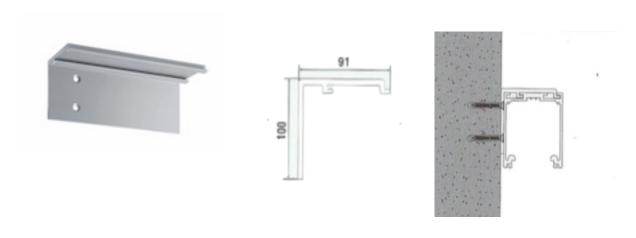

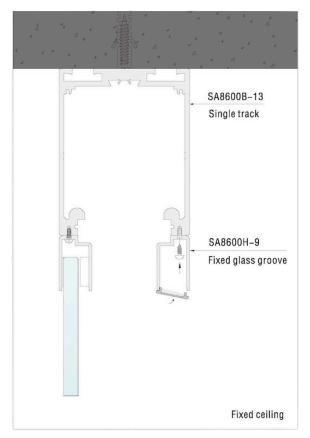

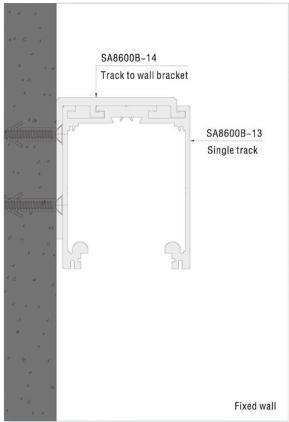

GHATTM Top Track with Mohair

