

## YDG313L Digi-Lock Digital Smart Pad Lock



FRONT

BACK

Introducing a very smart glass door lock...  
the preferred solution to secure your home or office.

The numbered keypad appears on the mirror screen when touched.

### FEATURES

- A simple solution for locking pivot doors
- Quick and easy installation
- Smartpad touch screen with optional card key
- Multi-featured
- Battery operated, including a 9 volt emergency battery back-up
- Automatic locking

### APPLICATIONS

- For internal or external doors
- Residential or commercial applications
- Suits both single and double doors

### AVAILABLE FINISHES

- Polished mirror

### TECHNICAL DETAILS

- No hole or glass cut-out required
- Dual access, either by card or by smart pad screen. Multiple cards can be enabled
- Suits 10mm or 12mm toughened safety glass
- 4x AA batteries will last up to one year
- Used in conjunction with standard Euroglass pivot door fittings
- Strike plate for door jambs available on request

## YDG313K Digital Lock Glass Keeper



FRONT

BACK

### AVAILABLE FINISHES

- Polished mirror

### TECHNICAL DETAILS

- No holes or notches required in glass
- Fits existing doors with minimum 3mm clearance
- Fitted with high bond tape
- Suitable for 10mm or 12 single or double action glass doors

**RCM100 Remote Access Receiver Module****TECHNICAL DETAILS**

- Remote access receiver module
- Required component if remote access is required
- Suitable for smart touch lock YDG313L

**WRC100 Wall Mountable Remote****TECHNICAL DETAILS**

- Lock and unlock function
- Operating range up to 30 metres
- Suitable for use with RCM100 to operate

**PRC100 Key Fob Remote****TECHNICAL DETAILS**

- Unlock function
- Operating range up to 30 metres
- Suitable for smart touch lock YDG313L

**ATS100 Aluminium/Timber Strike Plate****AVAILABLE FINISHES**

- 316 Satin stainless steel


**TECHNICAL DETAILS**

- Suitable for smart touch lock YDG313L


A stylish range of latching lever handles with locks



GLASS CUT-OUT FOR ALL LEVER HANDLE STYLES

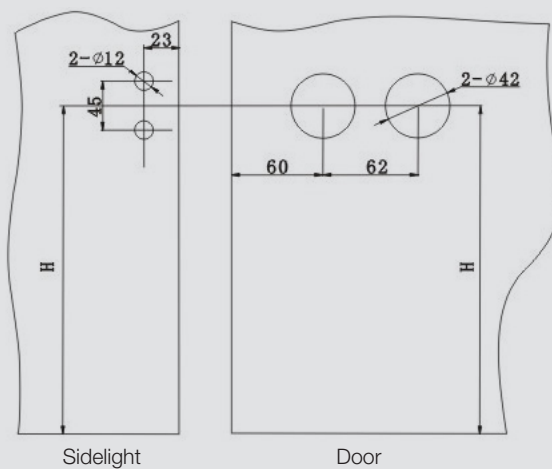

LEVER HANDLE TECHNICAL DIAGRAM

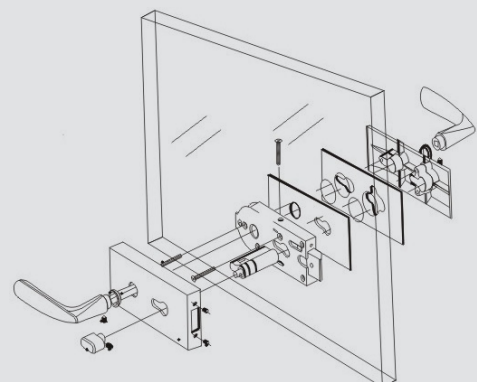

## LL-01K / LL-01-R2-CC



## AVAILABLE FINISHES

- Satin

## LL-19K / LL-19-S1



## AVAILABLE FINISHES

- Satin

## LL-21SP / LL-19-S1-CC



## AVAILABLE FINISHES

- Satin

## LL-05K / LL-05-R1



## AVAILABLE FINISHES

- Satin

## LL-05-R1-CC



## AVAILABLE FINISHES

- Satin

## LA-301 / LA-312K Patch Lock and Patch Keeper



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- LA-301: Patch lock, 210 x 64 series 590 mortice lock with 36mm throw c/w oval cylinders
- LA-312k: Patch keeper, 210 x 64 for LA-301

## FT-40 Overpanel to Side Panel Patch Fitting



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Overpanel to side panel patch fitting
- 15mm pivot

## LT-25 / LT-26K Patch Lock and Patch Keeper




### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Patch lock series T-25
- Patch keeper for LT-25

## LT-50 Patch Lock - Corner Fix



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Patch lock - corner fix, euro cylinder.
- Rectangular bolt and keeper

## LT-51 Patch Lock - Corner Fix



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Patch lock - corner fix series Tc51
- Euro cylinder
- 15mm bolt

## LT-52 / LT-53K Patch Lock and Patch Keeper



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- LT-52: Patch lock, centre fix, c/w euro style cylinder
- LT-53K: Keeper for LT-52 centre fix

## LT-54 / LT-54K Patch Lock and Patch Keeper



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Patch turn bolt lock series T-54
- Patch Keeper for LT-54

## LT-55 / LT-55k Patch Lock and Patch Keeper



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Patch Lock series T-55
- Patch Keeper for LT-55

## LT-56 / LT-57K Patch Lock and Patch Keeper



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Patch lock series T-56
- Patch keeper for LT-56 & 57

## LT-58 Patch Lock



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Patch lock series T-58

## LT-70 / LT-70K Patch Lock and Patch Keeper



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Patch lock series T-70
- Patch keeper for LT-70

## LT-81 / LT-81K Slide On Patch Lock and Patch Keeper



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Slide on patch lock, single sided LT-81
- Slide on patch keeper for LT-81

## LT-82 / LT-82K Slide On Patch Lock and Patch Keeper



## AVAILABLE FINISHES

- Mirror
- Satin

## TECHNICAL DETAILS

- Slide on patch lock, double sided LT-82
- Slide on patch keeper for LT-82



## LR-20 / LR-20L / LR-21K Patch Lock and Patch Keeper - Series R



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Patch lock series R-10
- Patch keeper series R-20
- Patch keeper series R-21

## LR-25 Patch lock - Series R



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Patch lock series R-25

## LR-51 / LR-53K Patch Lock and Patch Keeper - Series R



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Patch lock series R-51
- Patch keeper series R-53

## LR-54 Patch lock - Series R



### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Patch lock series R-54

## LS-13 / LS-13K Sliding Patch Lock and Patch Keeper




## AVAILABLE FINISHES

- Mirror
- Satin

## TECHNICAL DETAILS

- Sliding patch lock S-13
- Sliding patch keeper S-13

## LS-14K Patch Keeper - S



## AVAILABLE FINISHES

- Mirror
- Satin

## TECHNICAL DETAILS

- Patch keeper S-14

## LS-15K Sliding Patch Keeper



## AVAILABLE FINISHES

- Mirror
- Satin

## TECHNICAL DETAILS

- Patch keeper sliding S-15

## LS-20 / LS-21 Sliding Patch Lock and Patch Keeper




## AVAILABLE FINISHES

- Mirror
- Satin

## TECHNICAL DETAILS

- Sliding lock, S-10, c/w cylinder, glass to glass
- Sliding lock, S-21, c/w cylinder, glass to wall

## IL700C Indicator Lock - Door to Wall




### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Indicator lock
- Door to wall
- Glass cut out required

## IL701C Indicator Lock - Door to Sidepanel




### AVAILABLE FINISHES

- Mirror
- Satin

### TECHNICAL DETAILS

- Indicator lock
- Door to sidepanel
- Glass cut out required

## IL600C Indicator Lock - Door to Wall





### AVAILABLE FINISHES


- Mirror
- Satin

### TECHNICAL DETAILS

- Indicator lock
- Door to wall
- NO glass cut out required

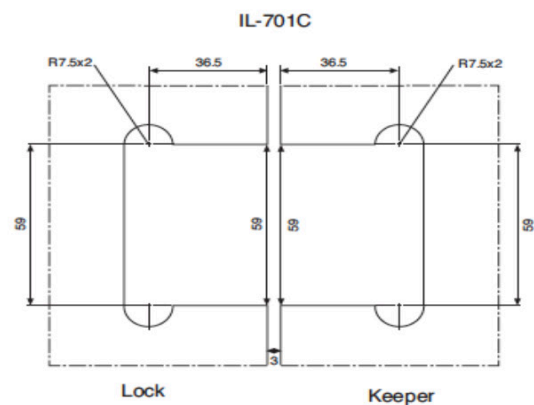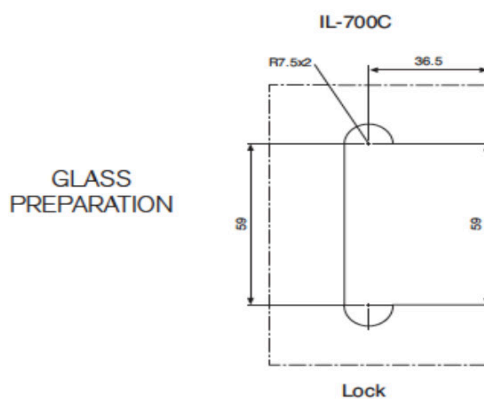

## 342.1 Patch Lock with Covers

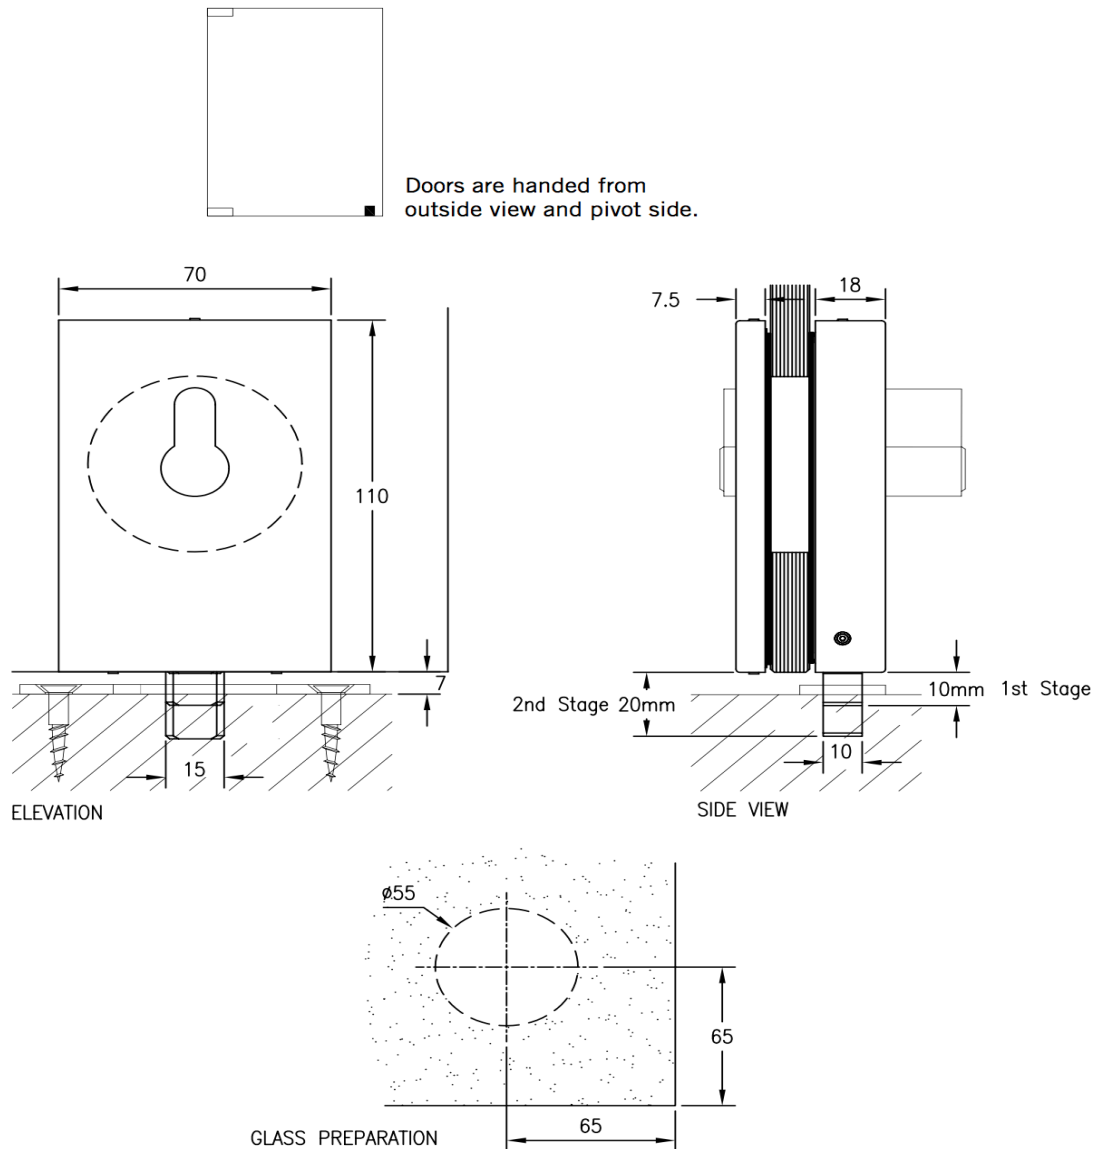


## AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless



## TECHNICAL DETAILS

- Universal 110mm x 70mm
- Lower pin throw patch lock with covers
- Specify glass thickness 10, 12 or 15mm
- Illustrated with 345 Keeper Plate
- Optional: CD 68 Cylinder

## 343.1 Patch Lock



Doors are handed from outside view and pivot side.

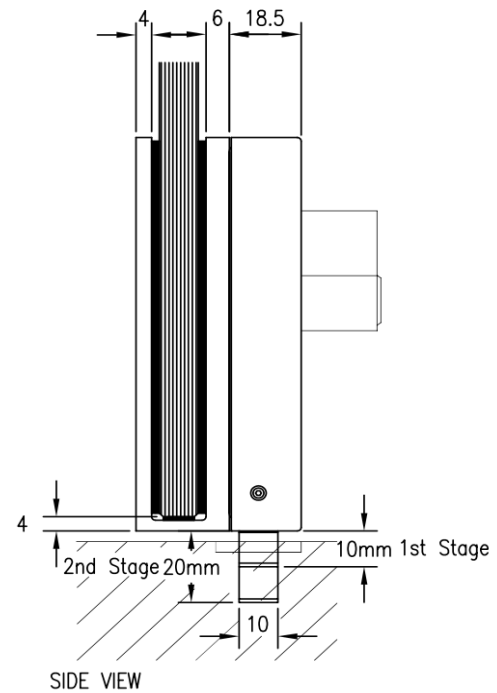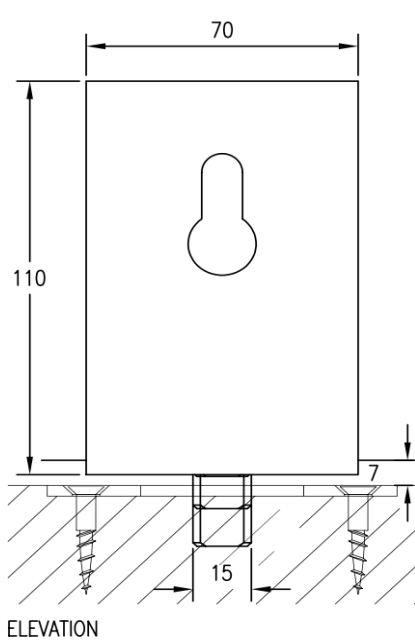


### AVAILABLE FINISHES

- Aluminium: SAA

### TECHNICAL DETAILS

- Universal 110mm x 70mm
- Lower pin throw slide over patch lock
- Specify glass thickness 10 or 12mm
- Illustrated with 345 Keeper Plate
- Optional: CD 68 Cylinder

## M14.400 Patch Lock

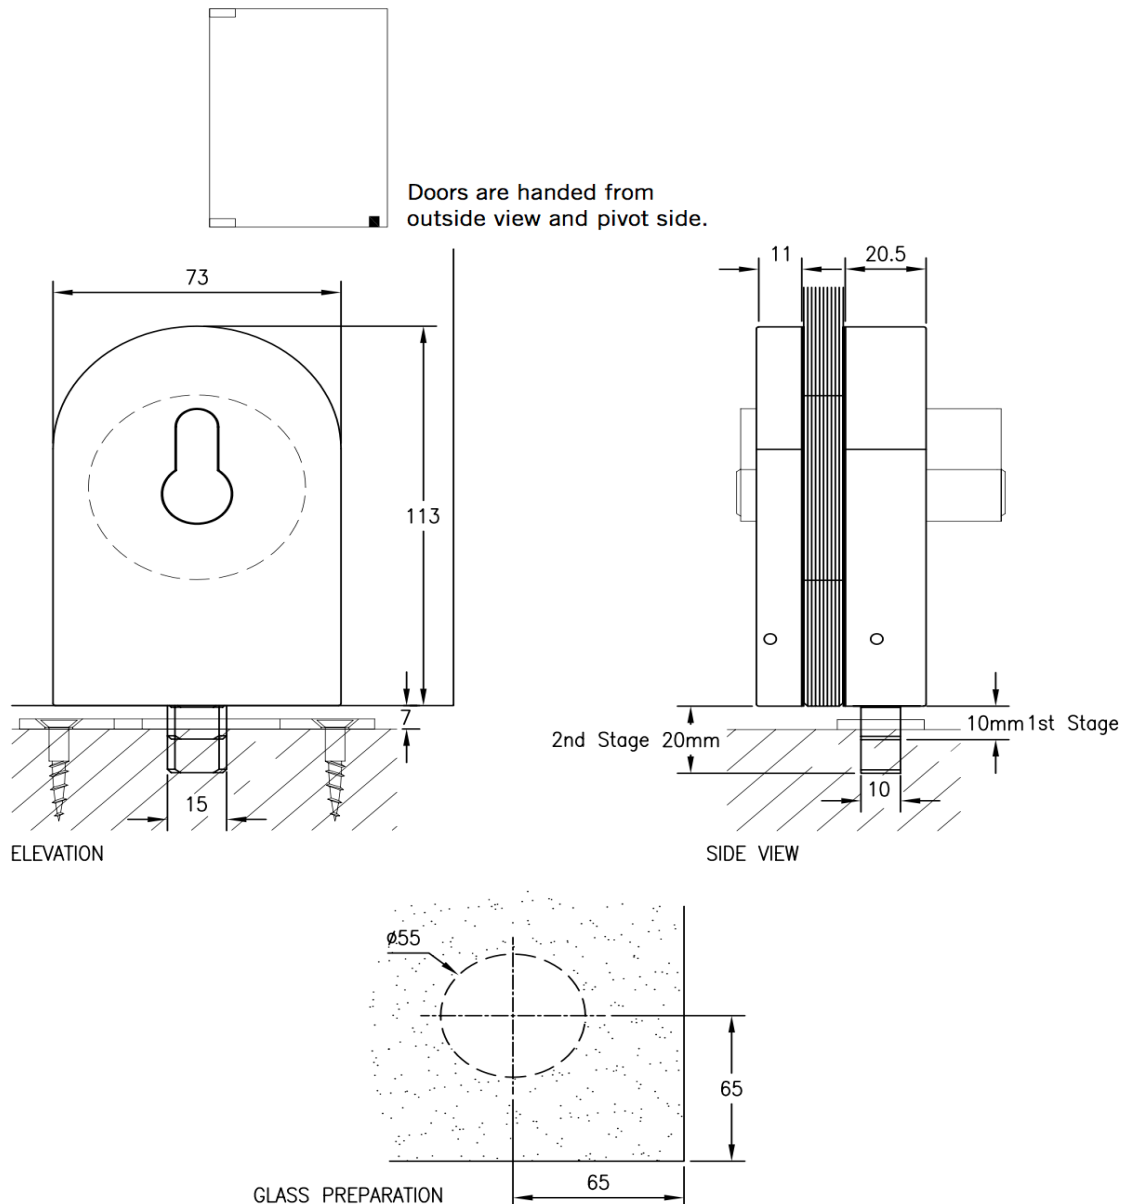


## AVAILABLE FINISHES

- Stainless: SSS, PSS

## TECHNICAL DETAILS


- Universal 110mm x 70mm
- Lower pin throw patch lock with covers
- Specify glass thickness 10, 12 or 15mm
- Illustrated with 345 Keeper Plate
- Optional: CD 68 Cylinder

## US10 Patch Lock

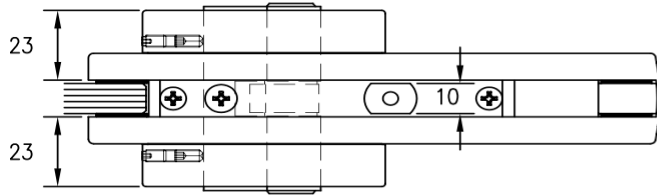


Doors are handed from outside view and pivot side.


REFLECTED PLAN

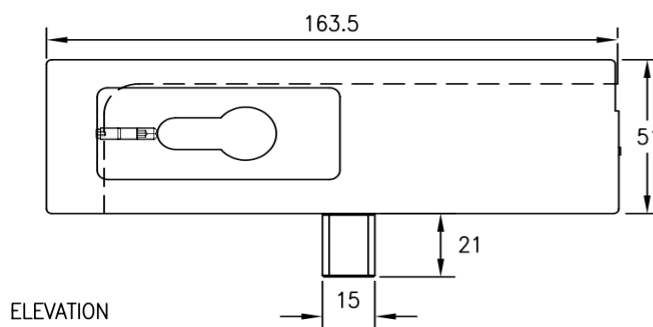

ELEVATION

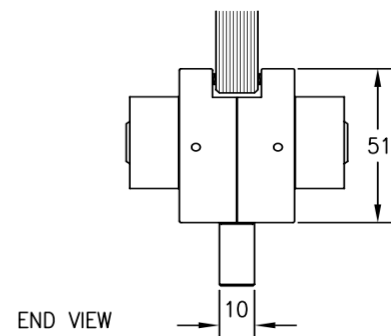

END VIEW

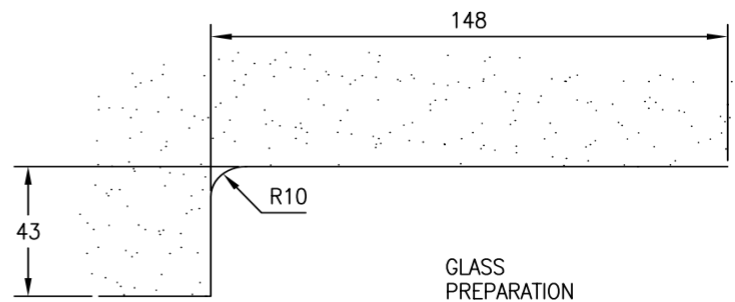

GLASS  
PREPARATION


### AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS


### TECHNICAL DETAILS

- Universal 164mm x 51mm
- Lower pin throw patch lock
- Specify glass thickness 10, 12 or 15mm
- Optional: CD 68 Cylinder


## US20 / GK50 Patch Lock




Doors are handed from outside view and pivot side.

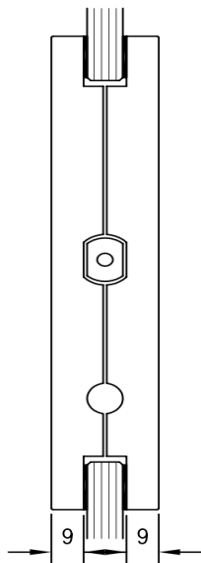


US 20 SIDE VIEW

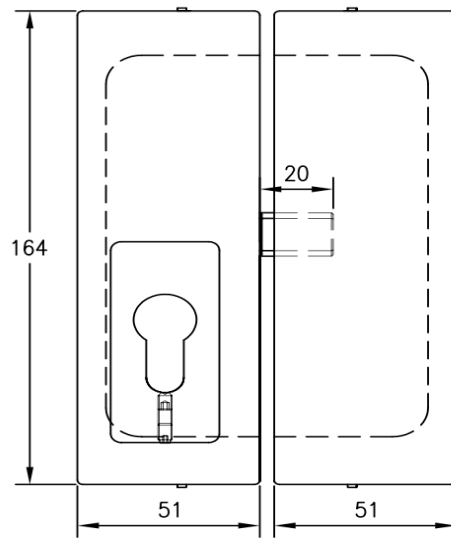


ELEVATION

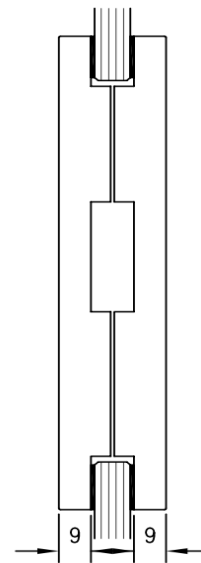

GK50 SIDE VIEW

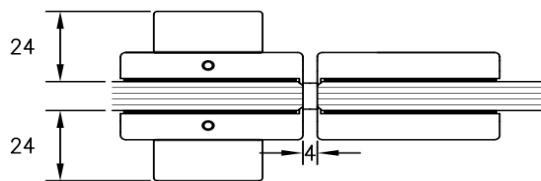

PLAN



GLASS PREPARATION US 20 &amp; GK 50

## AVAILABLE FINISHES



- Aluminium: Mill, SAA
- Stainless: SSS, PSS

## TECHNICAL DETAILS

- Universal 164mm x 51mm
- Side mount pin throw patch lock and GK50 side mount patch keeper to suit US20
- Specify glass thickness 10, 12 or 15mm
- Optional: CD 68 Cylinder




## CD351A Patch Lock

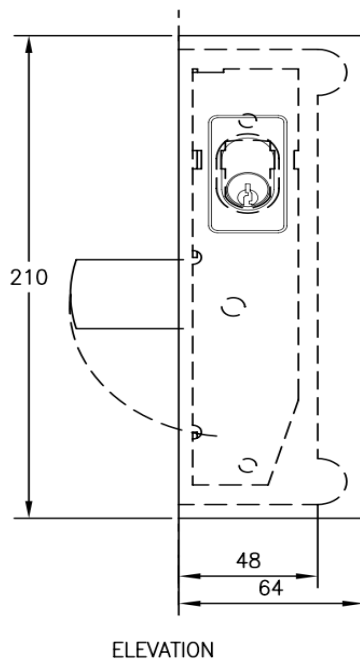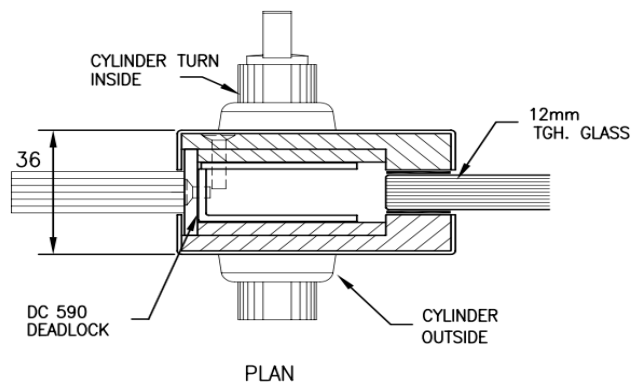


### AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS




Doors are handed from outside view and pivot side.

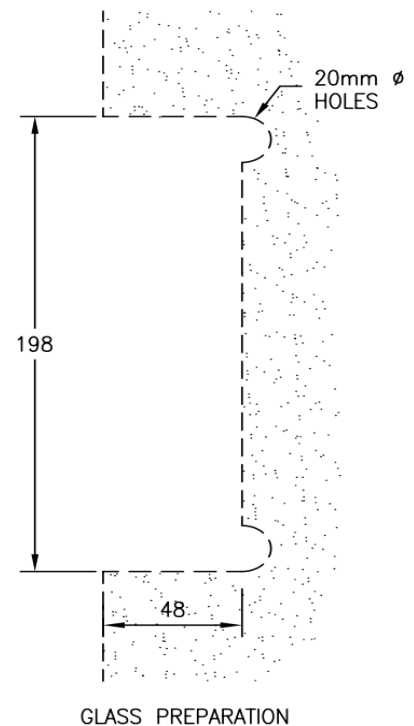


### TECHNICAL DETAILS

- ON-EAZI side fix patch lock complete with door lock (DC 590)
- Specify lock operation cylinder, double cylinder or cylinder and turn
- Note: Add CD351K if matching patch keeper is required.
- Specify glass thickness 10, 12 or 15mm


## CD351K Patch Lock




Doors are handed from outside view and pivot side.

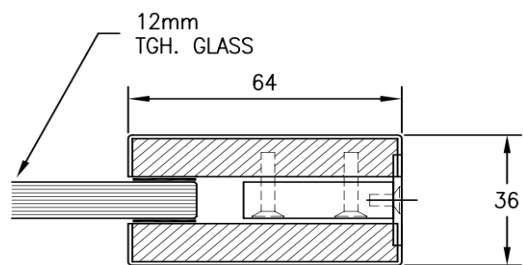

PLAN

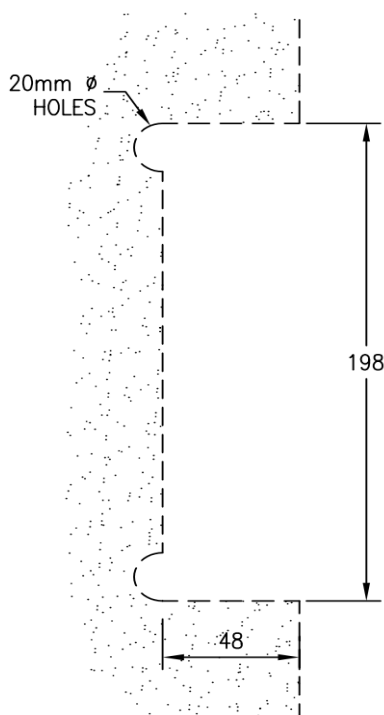

GLASS PREPARATION

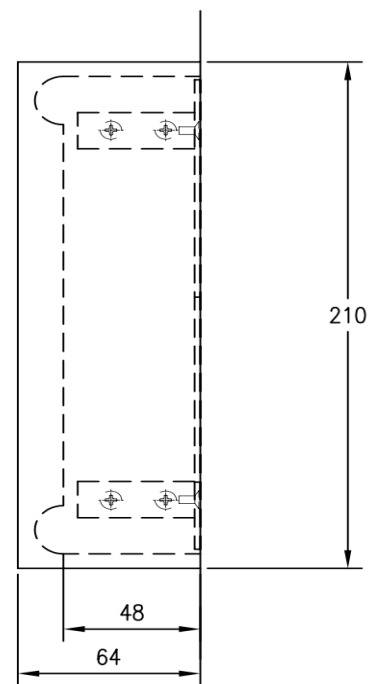

ELEVATION


#### AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS



#### TECHNICAL DETAILS

- ON-EAZI side fix patch keeper to suit CD351A with door lock
- Specify glass thickness 10, 12 or 15mm

## CD351B Patch Lock

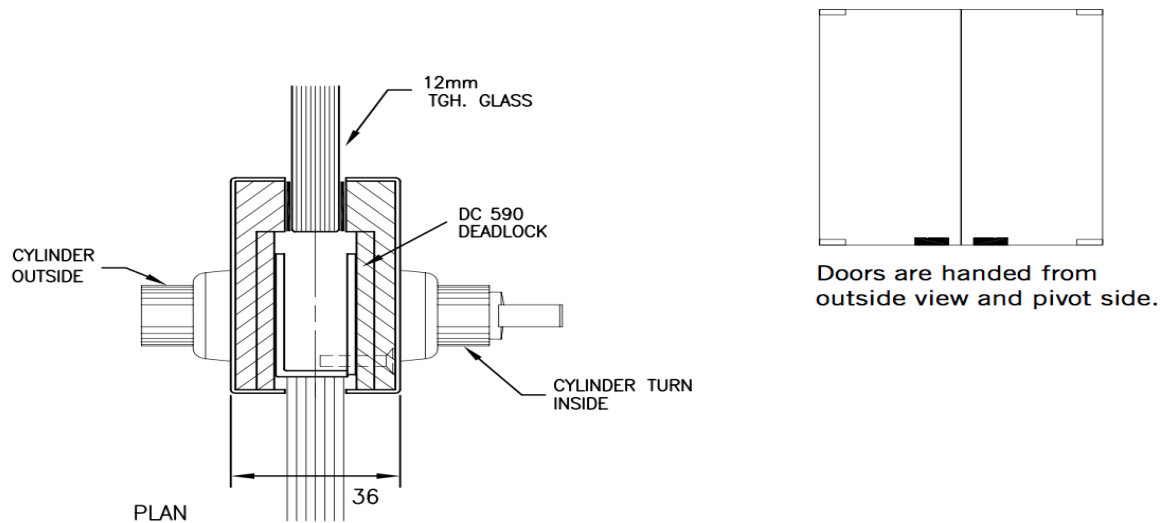

Doors are handed from outside view and pivot side.

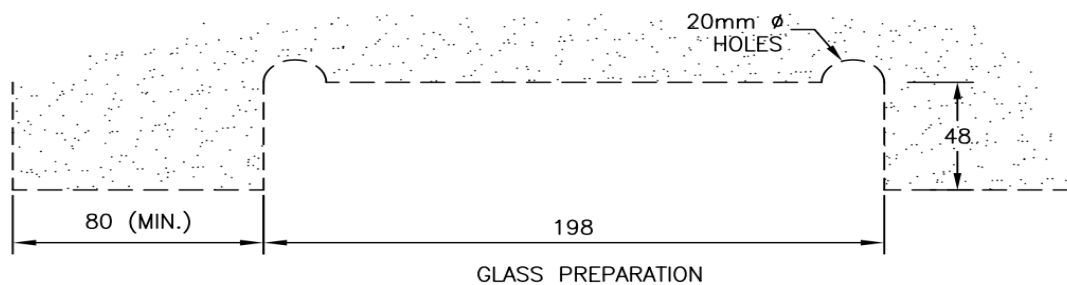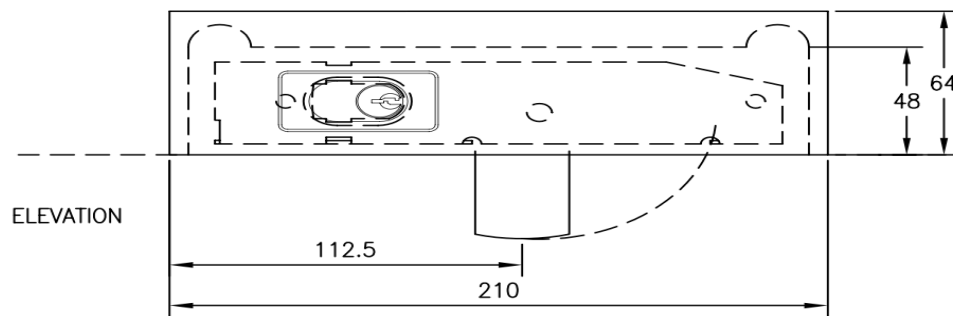


### AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS



### TECHNICAL DETAILS

- ON-EAZI bottom fix patch lock complete with door lock
- Specify lock operation single cylinder, double cylinder or cylinder and turn
- Add CD353 lock trough floor keeper if required
- Specify glass thickness 10, 12 or 15mm


## CD351S Patch Lock



Doors are handed from outside view and pivot side.

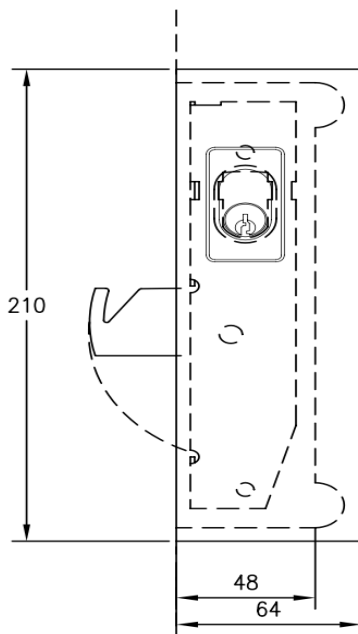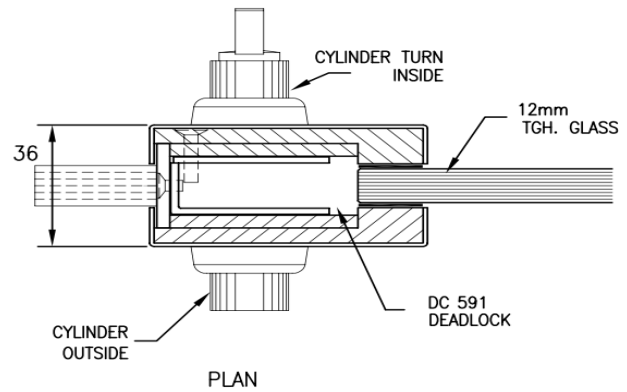

ELEVATION

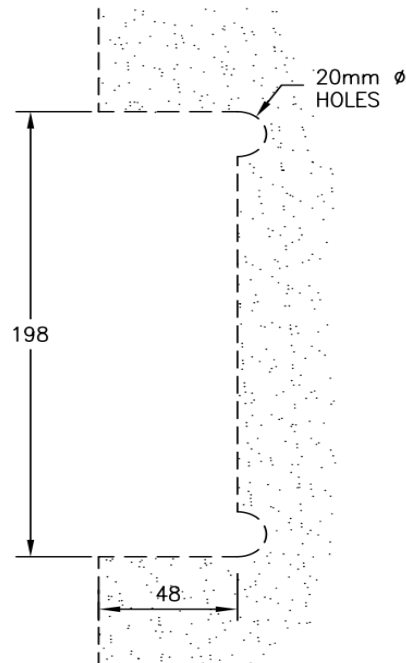

GLASS PREPARATION




## AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

## TECHNICAL DETAILS


- ON-EAZI sliding door side fix patch
- Lock complete with door lock
- Specify lock operation single cylinder, double cylinder or cylinder and turn
- Add CD351KS if matching patch keeper if required
- Specify glass thickness 10, 12 or 15mm

## CD351KS Patch Lock

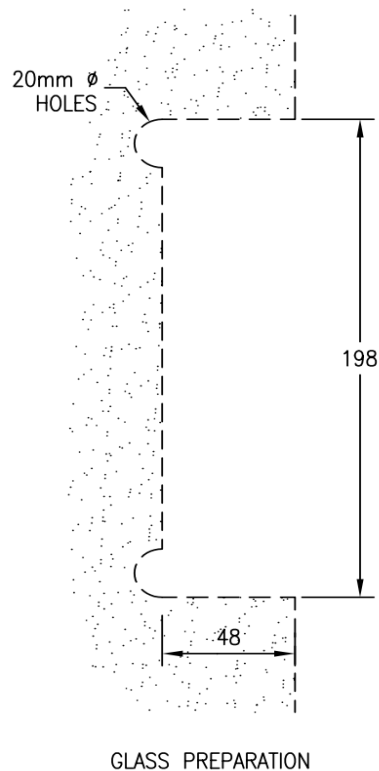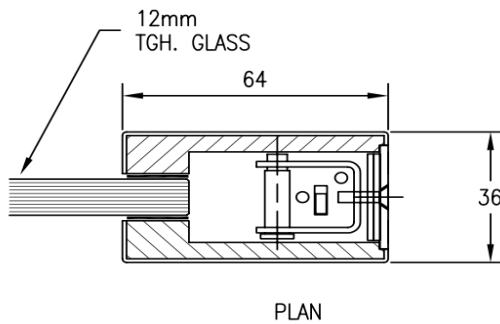

### AVAILABLE FINISHES



- Aluminium: Mill, SAA
- Stainless: SSS, PSS

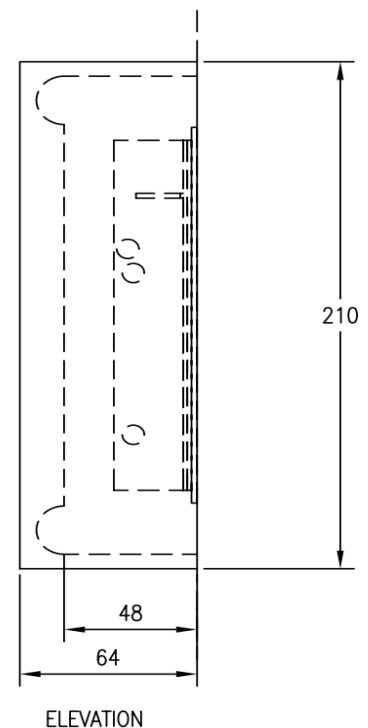



### TECHNICAL DETAILS

- ON-EAZI sliding door side fix patch keeper to suit CD351S with door lock
- Specify glass thickness 10, 12 or 15mm

## CD451 Patch Lock

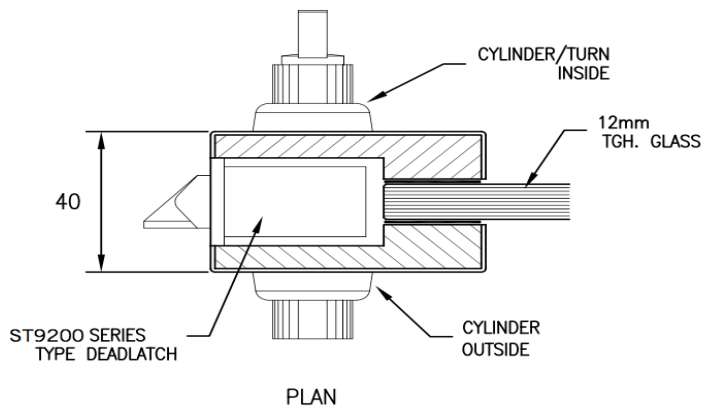

Doors are handed from outside view and pivot side.

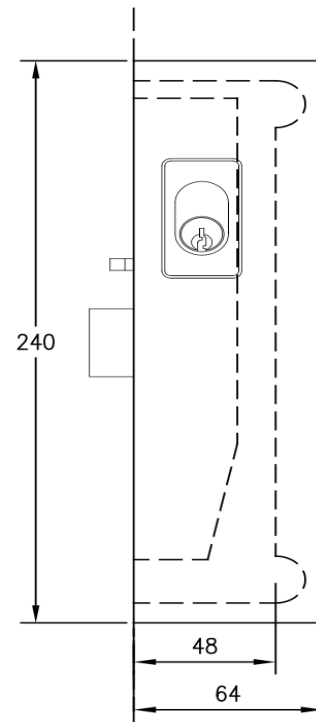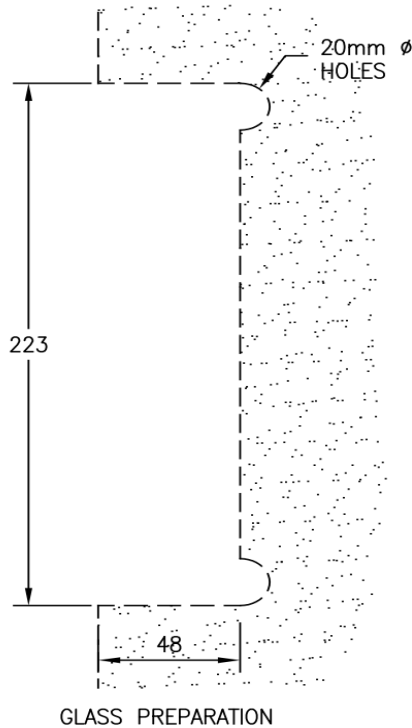


## AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

## TECHNICAL DETAILS

- ON-EAZI side fix patch lock complete with ST9210 lock
- Specify lock operation single cylinder, double cylinder or cylinder and turn. Specify hand of door.
- Add CD451K if matching keeper if required
- Specify glass thickness 10, 12 or 15mm

## CD451E Patch Lock

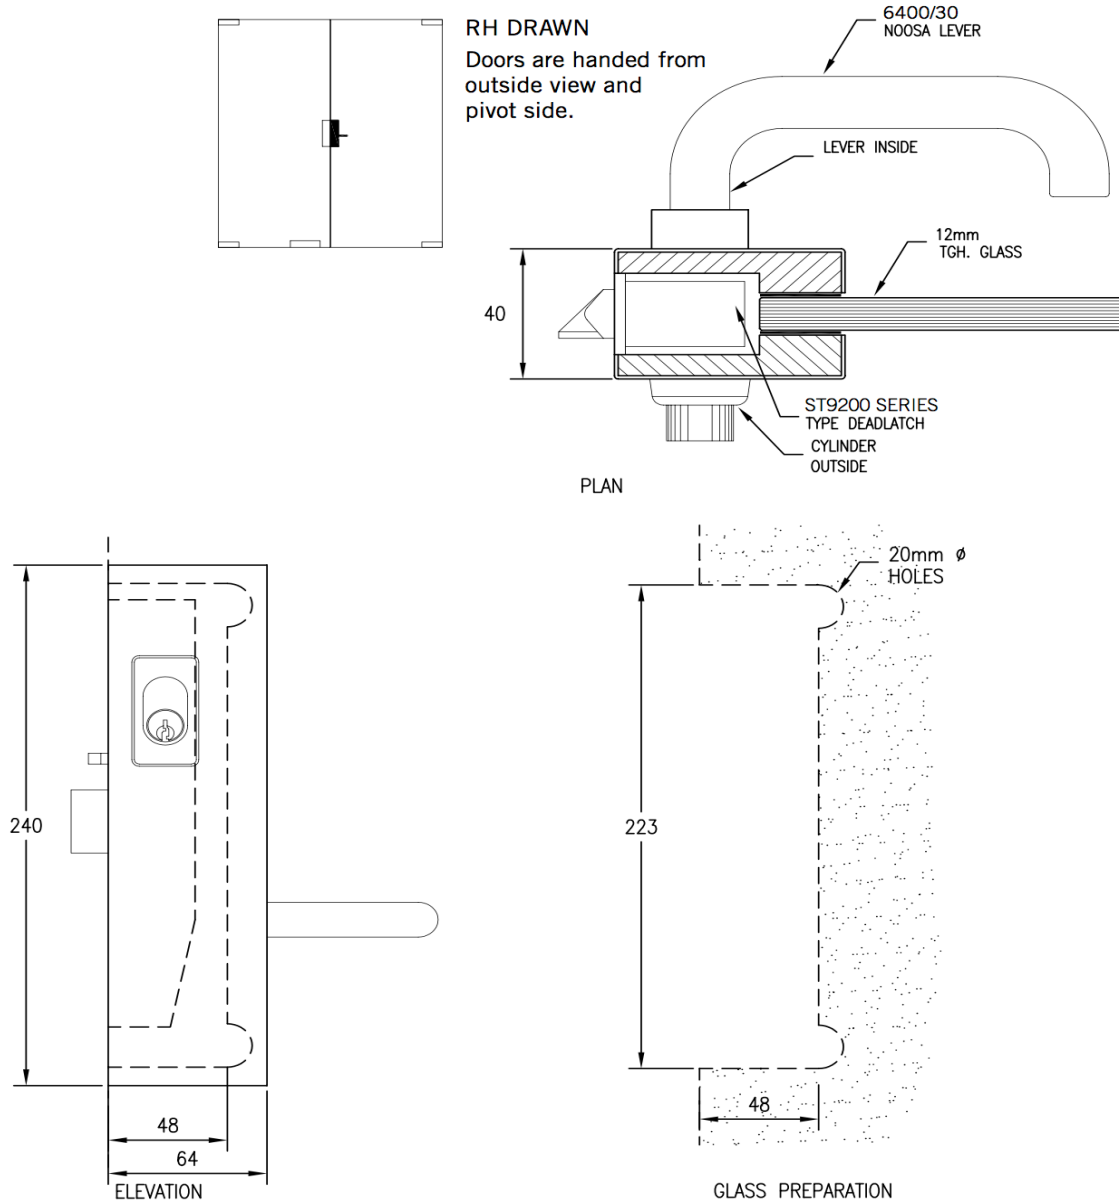



### AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

### TECHNICAL DETAILS


- ON-EAZI side fix EGRESS patch lock complete with ST9212 lock and series lever furniture
- Specify lock operation, free lever inside only, cylinder or blank outside
- Specify hand of door
- Add CD451K if matching patch keeper is required
- Specify glass thickness 10, 12 or 15mm

## CD451F Patch Lock

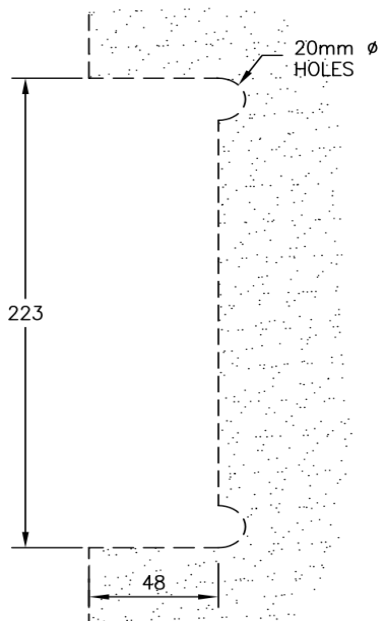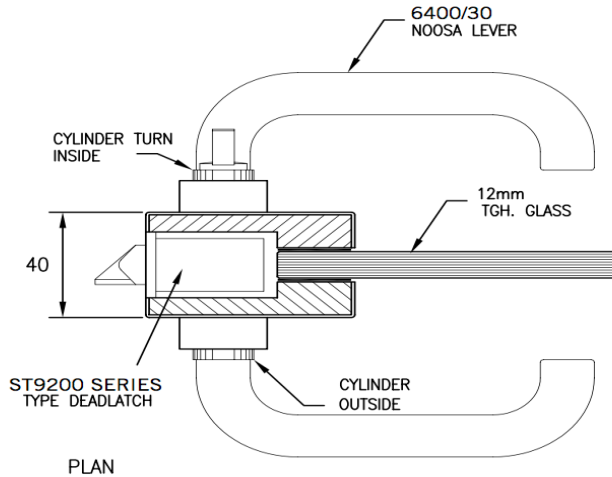


## AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS



## RH DRAWN

Doors are handed from outside view and pivot side.

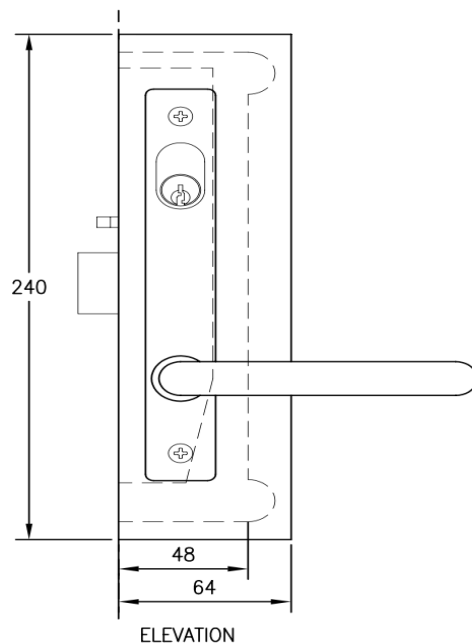


## TECHNICAL DETAILS




- ON-EAZI side fix patch lock complete with ST9212 lock and 6400 series lever furniture
- Specify lock operation single cylinder, double cylinder or cylinder and turn with double levers
- Specify hand of door
- Add 451K if matching patch keeper is required
- Specify glass thickness 10, 12 or 15mm



## CD451K Patch Lock



Doors are handed from outside view and pivot side.

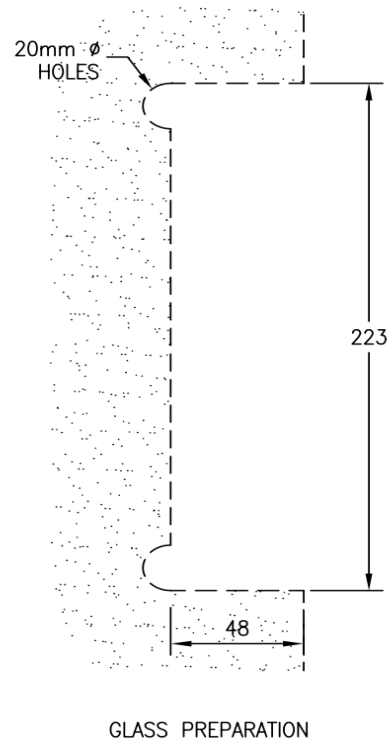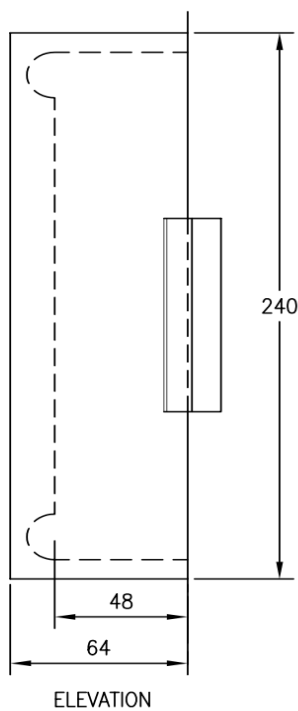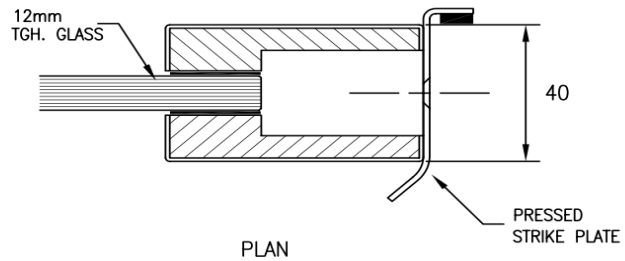



### AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

### TECHNICAL DETAILS

- ON-EAZI side fix patch lock keeper to suit CD451
- CD451E and CD451F with ST9200 series locks
- Specify glass thickness 10, 12 or 15mm



## CD451KE Patch Lock

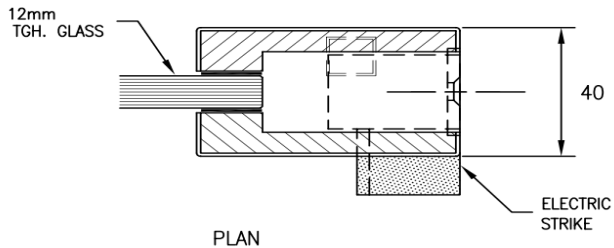

LH DRAWN

Note: state open in or open out at the time of order

Doors are handed from outside view and pivot side.

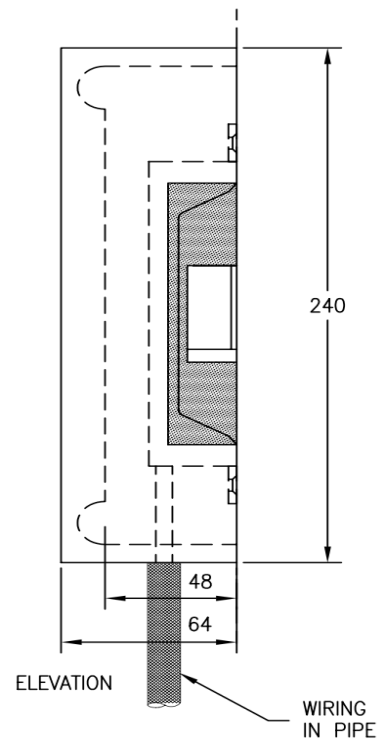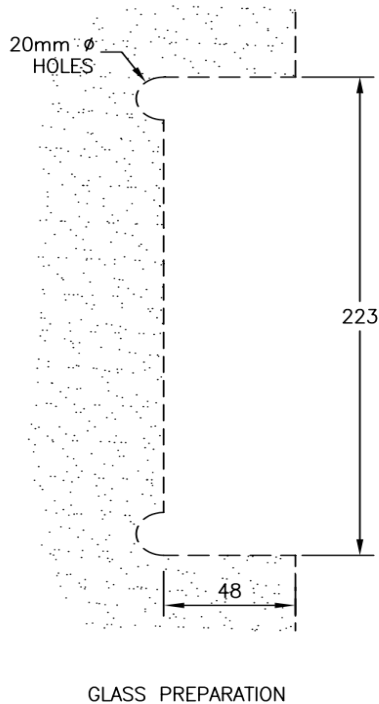


## AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

## TECHNICAL DETAILS


- ON-EAZI side fix patch keeper incorporating FSH FES20M electric strike to suit CD451, CD451E and CD451F with ST9200 series locks
- Note: wiring possibilities include surface pipe, edge channel or horizontal silicone joint
- Note: wiring by surface pipe indicated on drawing
- Specify glass thickness 10, 12 or 15mm
- Specify handing

## CD451/3540 Patch Lock



### RH DRAWN


Doors are handed from outside view and pivot side.

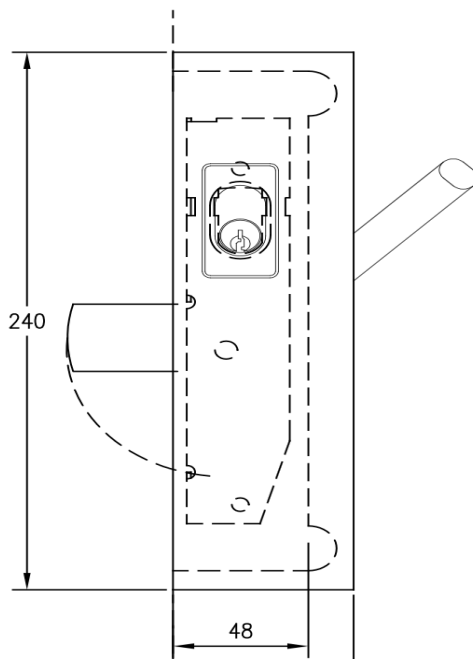


ELEVATION

### AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

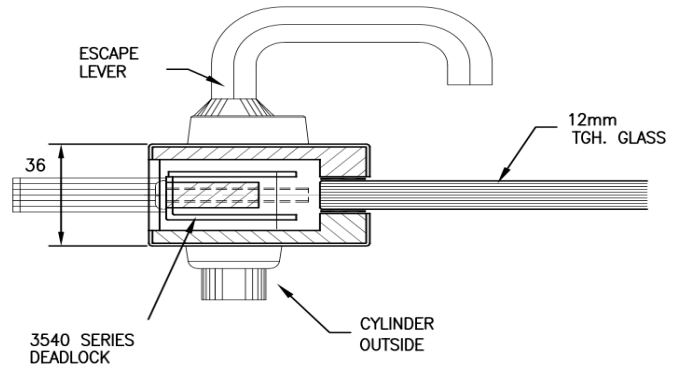

PLAN

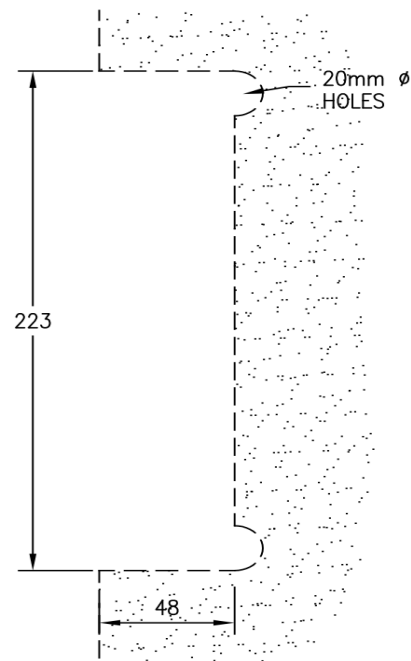


GLASS PREPARATION

### TECHNICAL DETAILS




- ON-EAZI side fix patch lock complete with door lock (3542 long throw) or (3542 short throw)
- Specify lock operation cylinder outside nad lever inside or lever inside only
- Specify hand of door
- Specify CD451/3542 for long throw or CD451/3540 for short throw or CD451/3541 for sliding lock
- Note: Add CD451 K/3540 if matching patch keeper is required.
- Specify glass thickness 10, 12 or 15mm

## CD451K/3540 Patch Lock



NON HANDED

Doors are handed from outside view and pivot side.

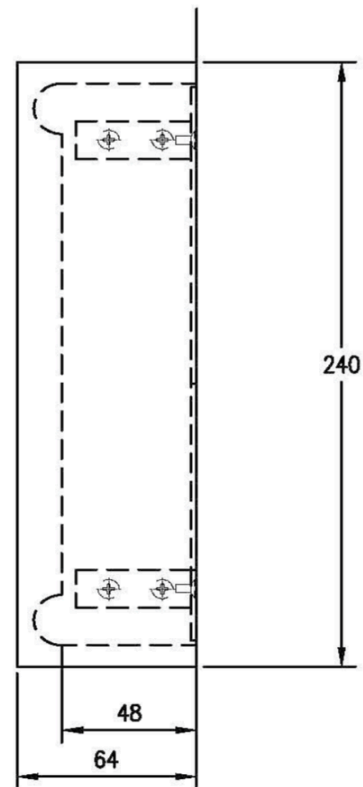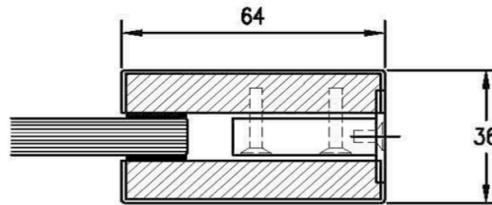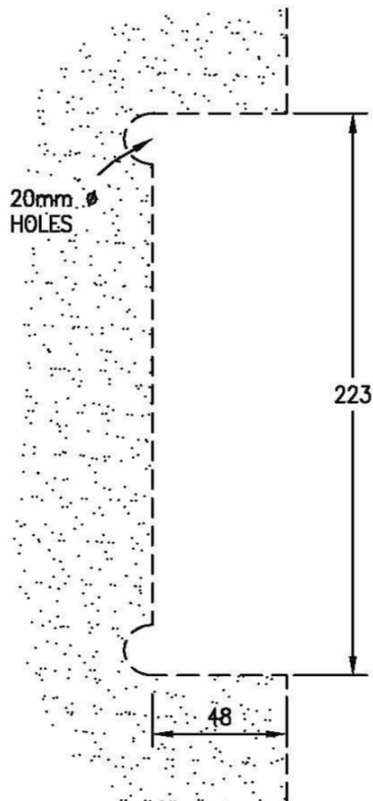


## AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

## TECHNICAL DETAILS


- ON-EAZI side fix patch keeper to suit CD451/3540 door lock
- Specify glass thickness 10, 12 or 15mm

## CD1050 Patch Lock




### NON HANDED


Doors are handed from outside view and pivot side.

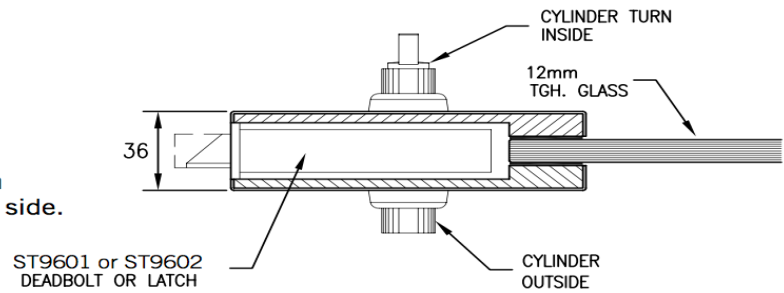

PLAN

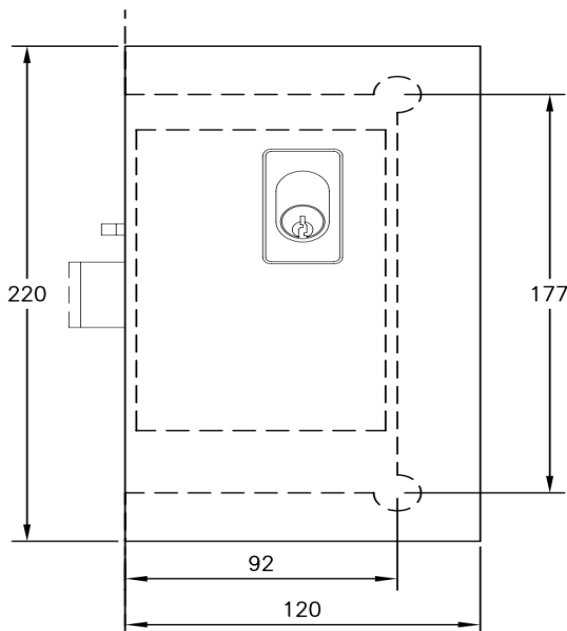

ELEVATION

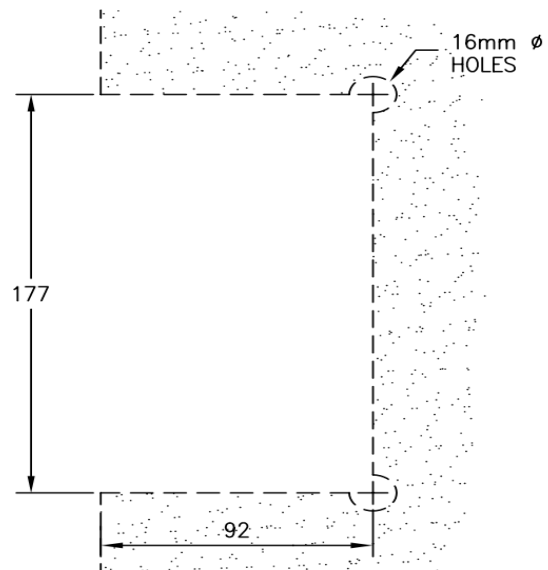

GLASS PREPARATION



### AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

### TECHNICAL DETAILS


- ON-EAZI side fix patch lock complete with wide backset door lock (ST9601 or ST9602)
- Specify lock operation single cylinder, double cylinder or cylinder and turn
- Specify hand of door
- Note: Add CD1051K or CD1050K if matching patch keeper required
- Specify glass thickness 10, 12 or 15mm
- Specify lock type ST9601, Deadbolt/ST9602 or Deadlatch

## CD1050E Patch Lock

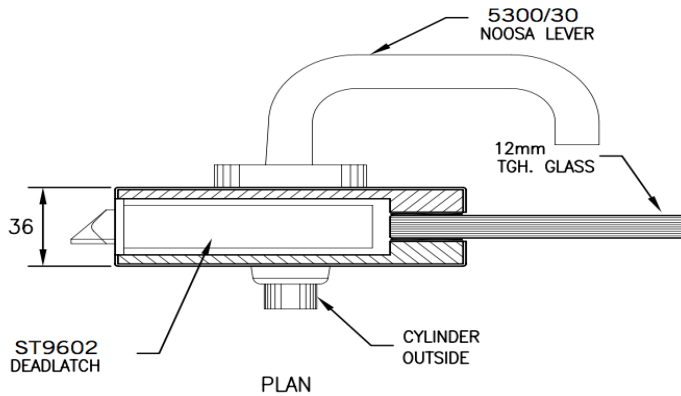


RH DRAWN

Doors are handed from outside view and pivot side.

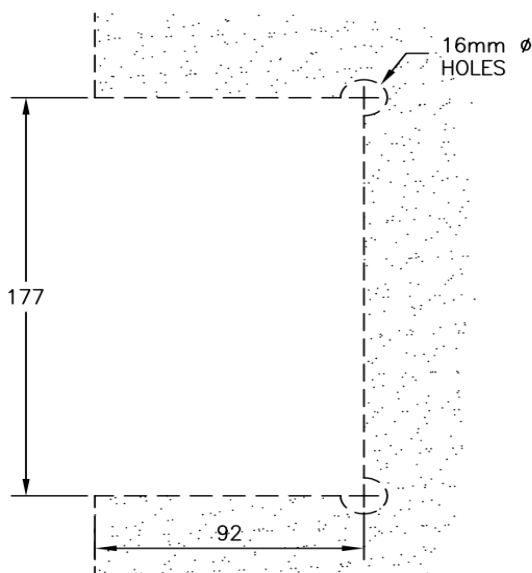

GLASS PREPARATION

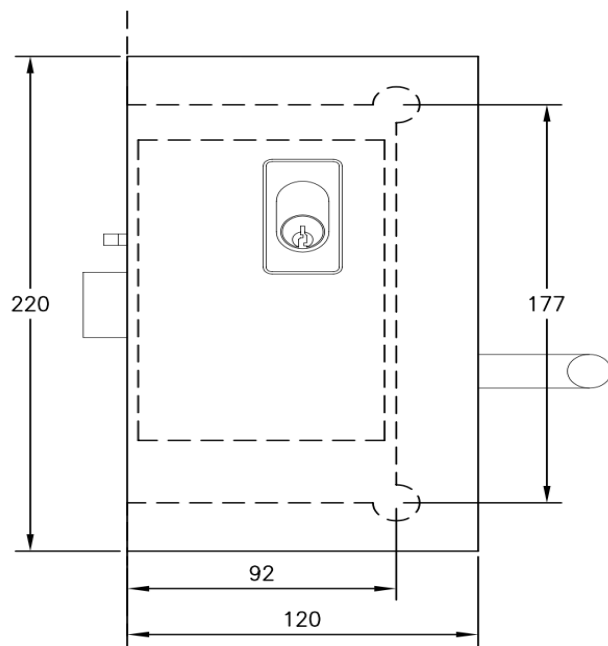

ELEVATION


## AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

## TECHNICAL DETAILS



- ON-EAZI side fix EGRESS latch lock complete with wide backset door lock (ST9602) and lever furniture inside only.
- Specify lock operation free lever inside always, cylinder or blank outside
- Specify hand of door
- Note: Add CD1051K or CD1050K if matching patch keeper required
- Specify glass thickness 10, 12 or 15mm

## CD1050F Patch Lock




### RH DRAWN

Doors are handed from outside view and pivot side.

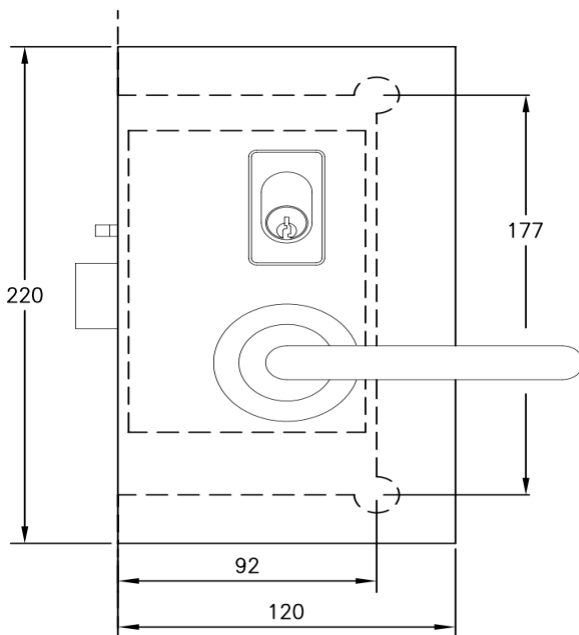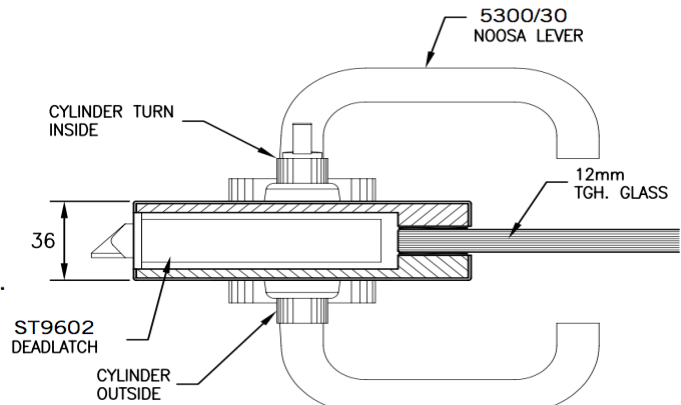

ELEVATION

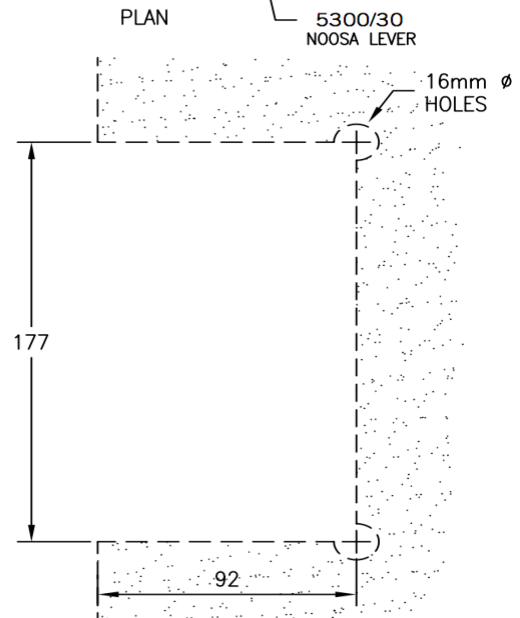

GLASS PREPARATION



### AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

### TECHNICAL DETAILS


- ON-EAZI side fix patchlock complete with wide backset door lock (ST9602) and lever furniture
- Specify lock operation single cylinder, double cylinder or cylinder and turn with double levers.
- Specify hand of door
- Note: Add 1051K or CD1050K if matching patch keeper required
- Specify glass thickness 10, 12 or 15mm

## 1050K Patch Lock

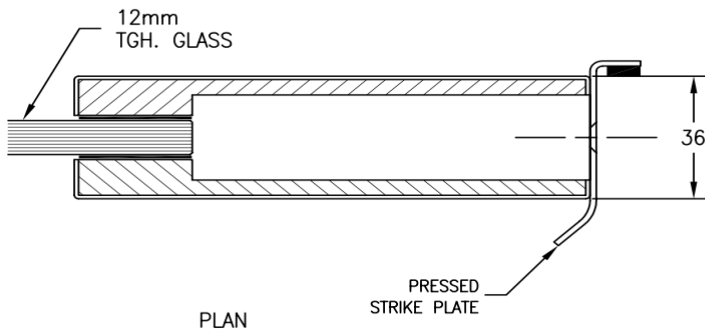

## NON HANDED


Doors are handed from outside view and pivot side.

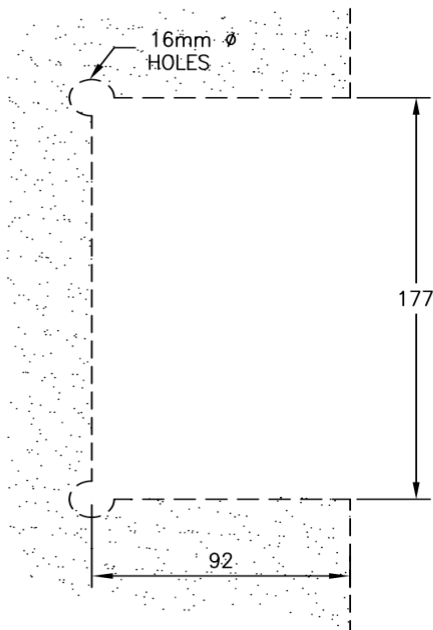

## GLASS PREPARATION

## AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

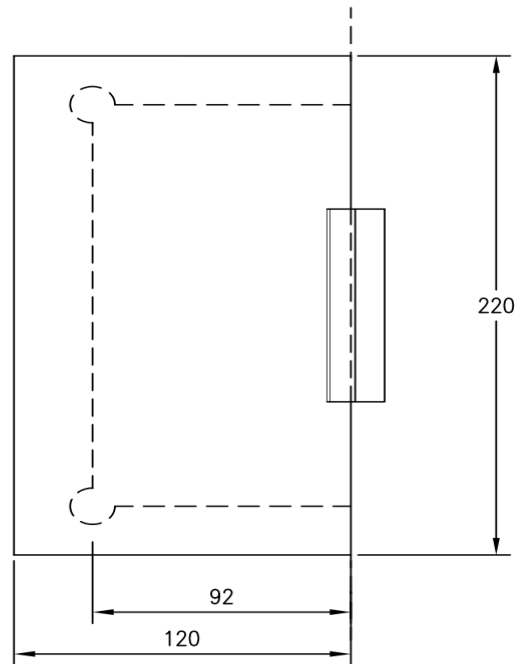


## ELEVATION

## TECHNICAL DETAILS

- ON-EAZI side fix patch keeper to suit CD1050, CD1050E and CD1050F with door lock (ST9601 or ST9602)
- Note: This patch fitting is used generally on pairs of doors to match patch lock
- Specify glass thickness 10, 12 or 15mm





## 1051K Patch Lock




### NON HANDED

Doors are handed from outside view and pivot side.

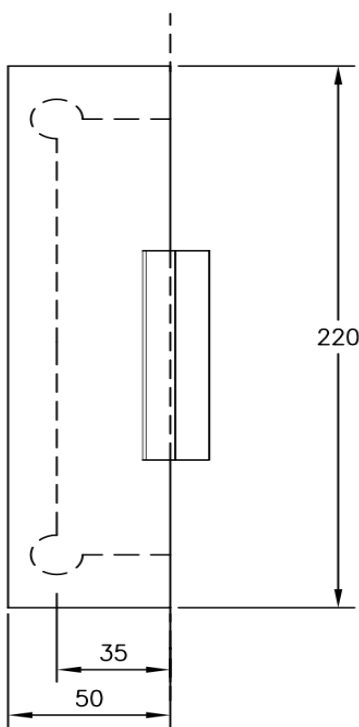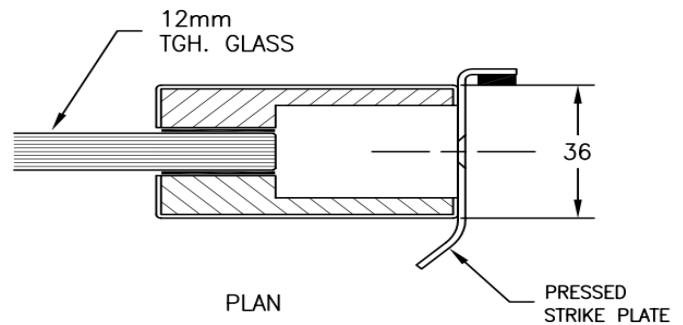

ELEVATION

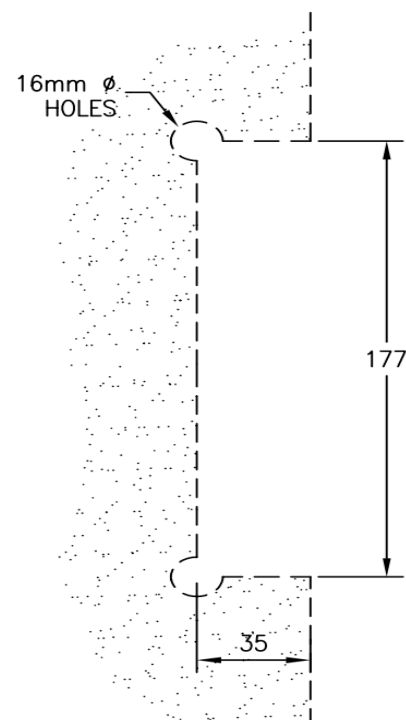

GLASS PREPARATION



### AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

### TECHNICAL DETAILS

- ON-EAZI side fix patch keeper to suit CD1050, CD1050E and CD1050F with door lock (ST9601 or ST9602)
- Note: This patch fitting is used generally on side panels
- Specify glass thickness 10, 12 or 15mm



## CD1050KE Patch Lock

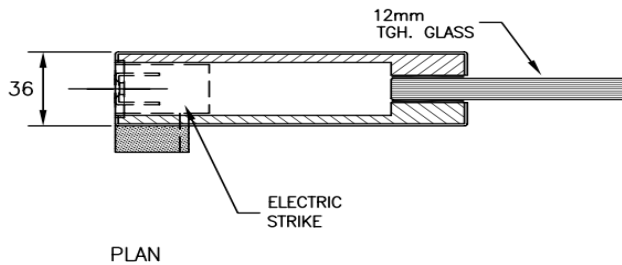

NON HANDED

Note: state open in or open out at the time of order

Doors are handed from outside view and pivot side.

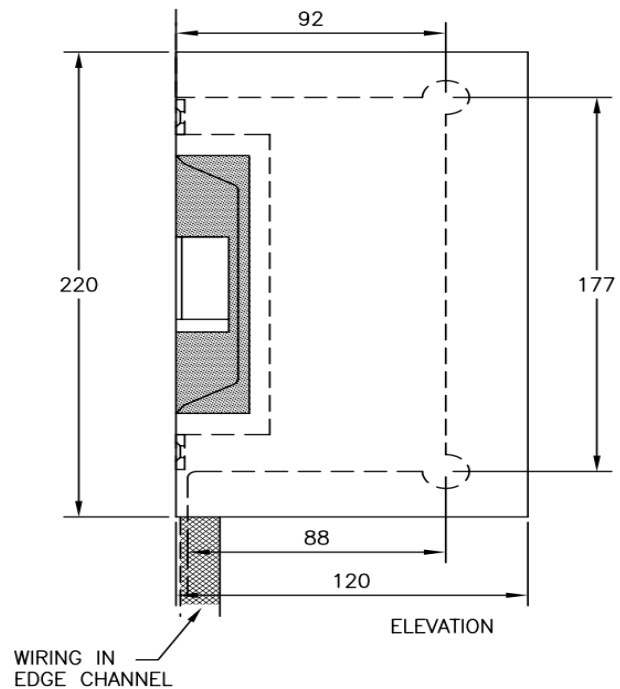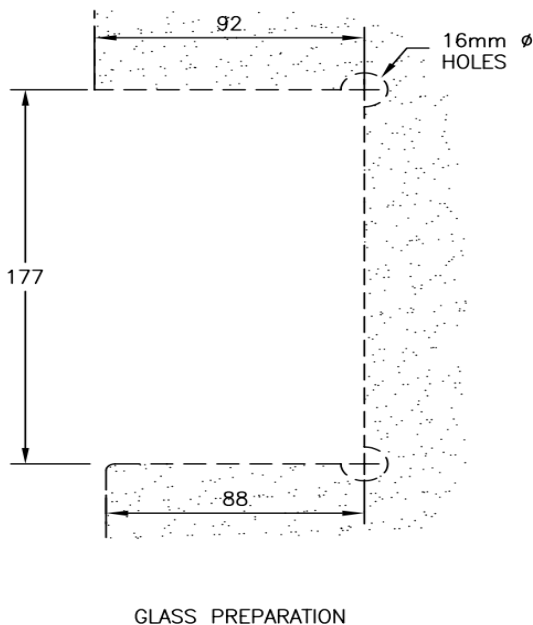


## AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

## TECHNICAL DETAILS

- ON-EAZI side fix electric strike patch keeper to suit CD1050, CD1050E and CD1050F, incorporating FSH FES20M electric strike
- Note: Wiring possibilities include surface pipe, edge channel or horizontal silicone joint
- Note: wiring by edge channel indicated on drawing
- Specify glass thickness 10, 12 or 15mm
- Specify hand of door



## CD1051KE Patch Lock




### NON HANDED

Note: state open in or open out at the time of order

Doors are handed from outside view and pivot side.

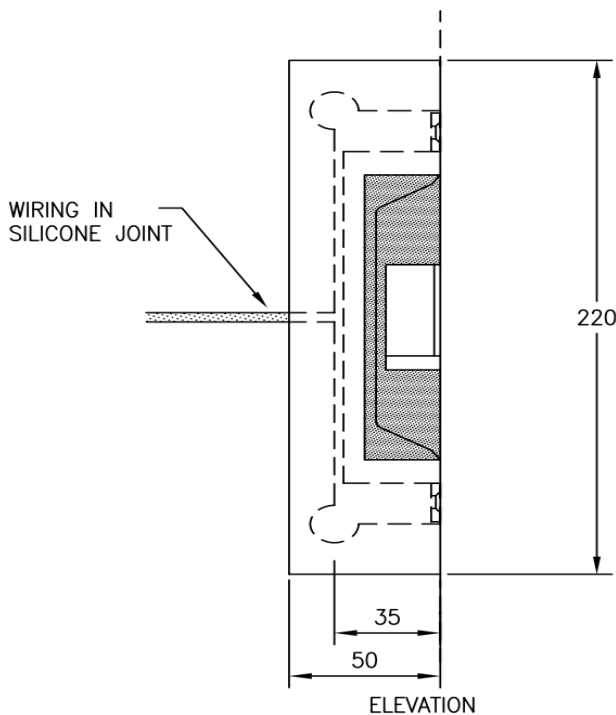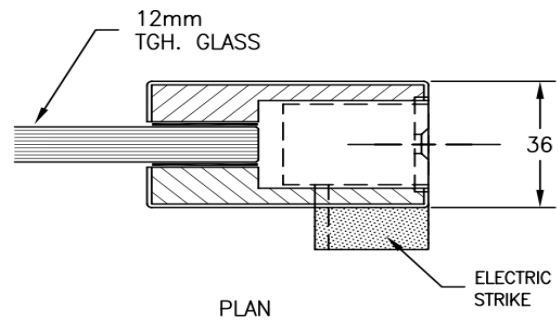

ELEVATION

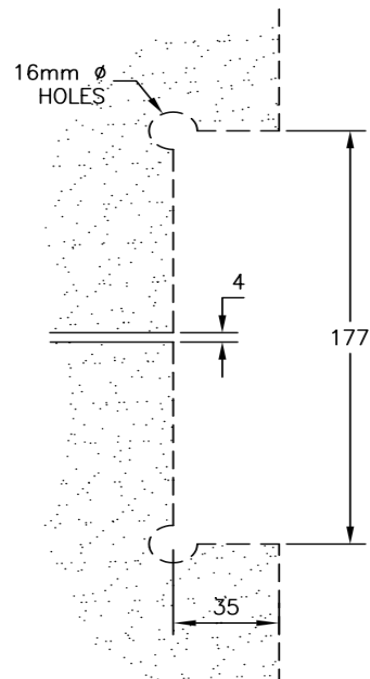

GLASS PREPARATION


### AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

### TECHNICAL DETAILS



- ON-EAZI side fix electric strike patch keeper to suit CD1050, CD1050E and CD1050F, incorporating FSH FES20M electric strike
- Note: Wiring possibilities include surface pipe, edge channel or horizontal silicone joint
- Note: wiring in silicone joint indicated on drawing
- Specify glass thickness 10, 12 or 15mm
- Specify hand of door

## CD49 Patch Lock




## NON HANDED


Doors are handed from outside view and pivot side.

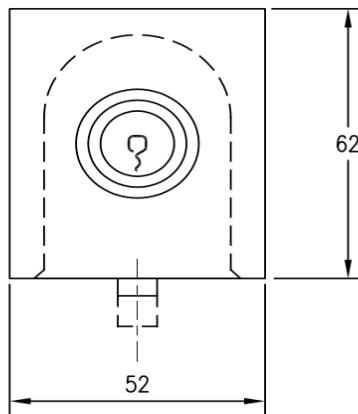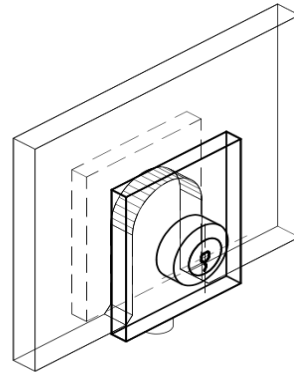


ELEVATION

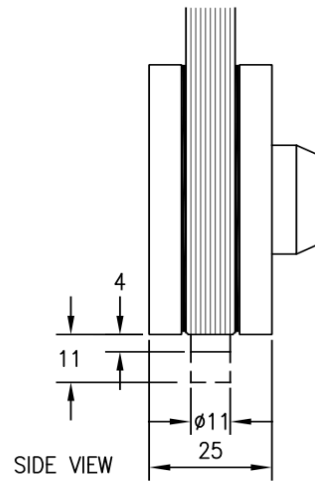

SIDE VIEW

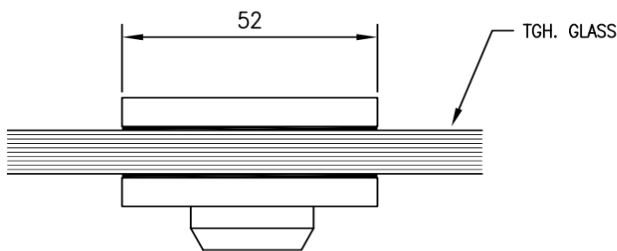

PLAN

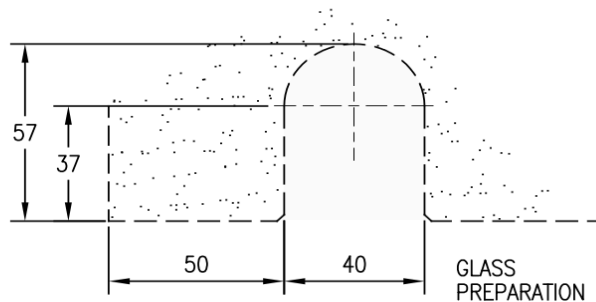


## AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

## TECHNICAL DETAILS





- ON-EAZI Euro type mini patch lock for showcase or small locking door
- Key operation from one side only
- Specify glass thickness 8 or 10mm
- Note: Add CD60-A floor keeper if required

## CD56TP Patch Lock



### NON HANDED

Doors are handed from outside view and pivot side.

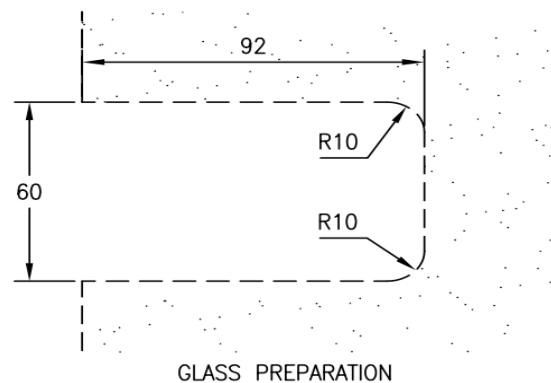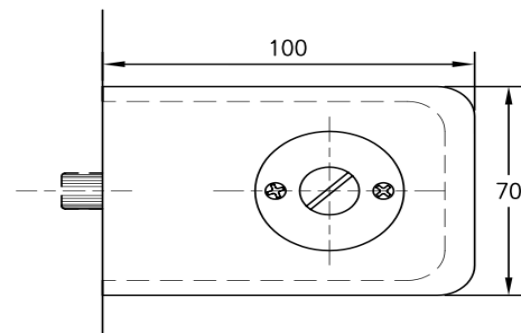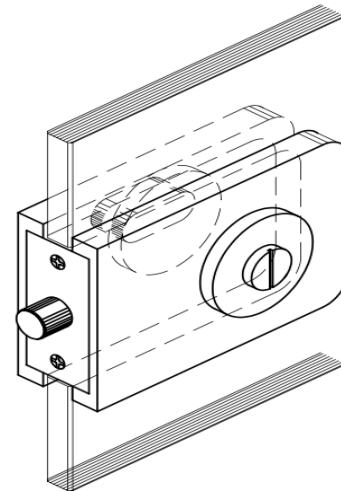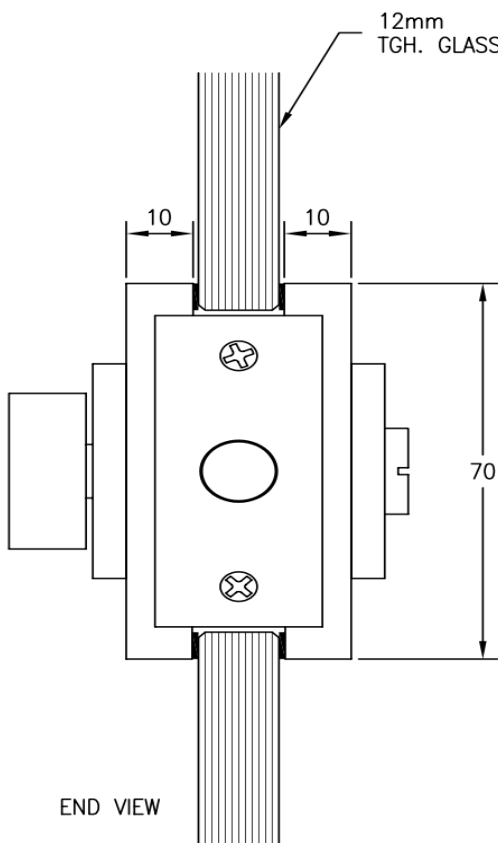


### AVAILABLE FINISHES

- Aluminium: Mill, SAA
- Stainless: SSS, PSS

### TECHNICAL DETAILS


- ON-EAZI toilet door centre patch lock with privacy bolt set
- Specify glass thickness 8, 10, 12 or 15mm
- Note: Add CD56TPK matching patch keeper if required

## CD56TPK Patch Lock

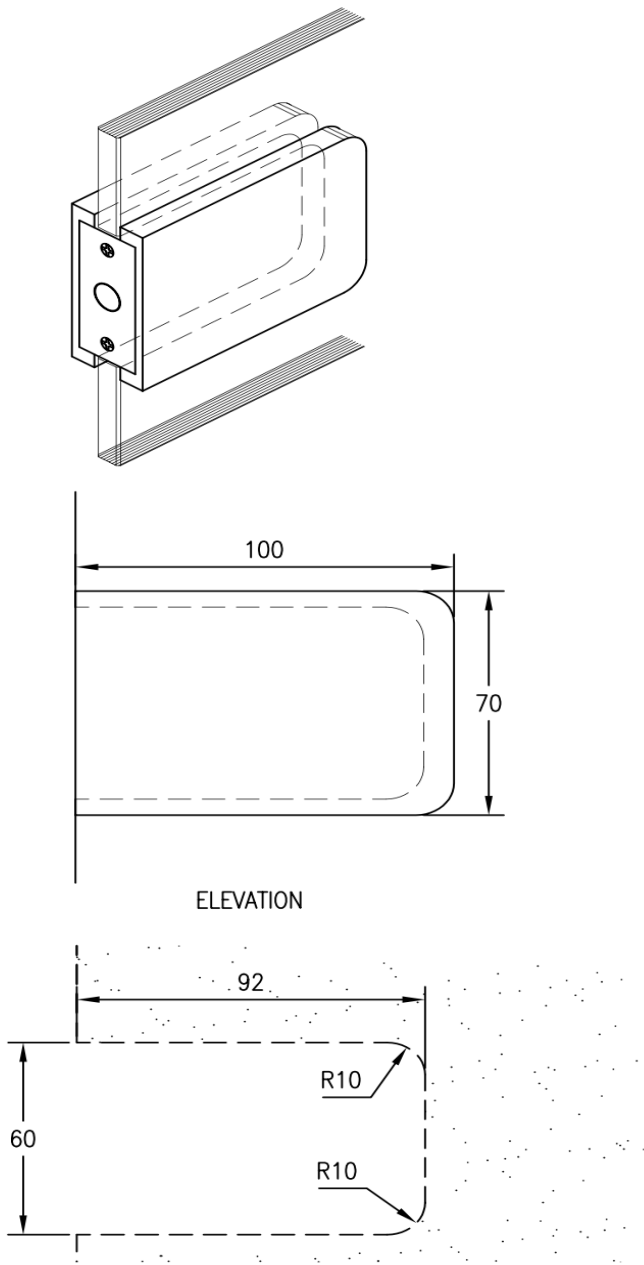


## AVAILABLE FINISHES

- Stainless: SSS, PSS




**NON HANDED**  
Doors are handed from outside view and pivot side.

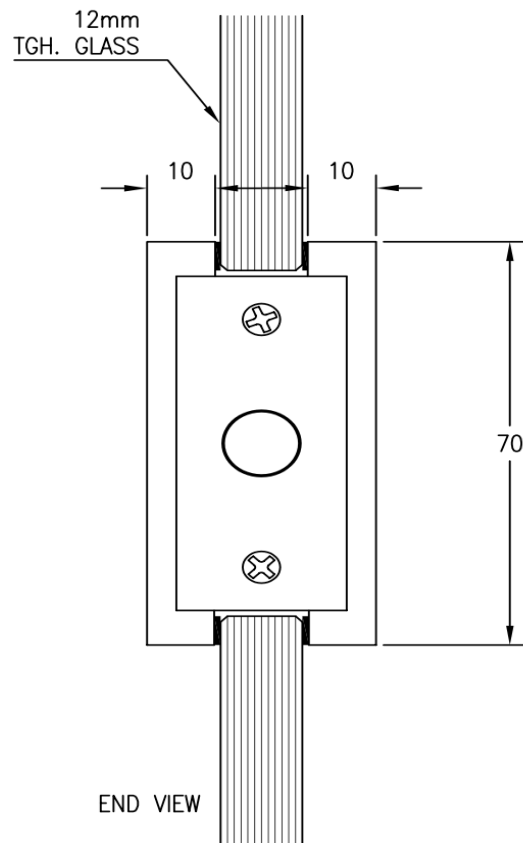


## TECHNICAL DETAILS

- ON-EAZI toilet door centre patch lock keeper
- Specify glass thickness 8 or 10 or 12mm
- Note: CD56TP matching patch lock


## CD353 / CD353C / CD353C/S Patch Lock

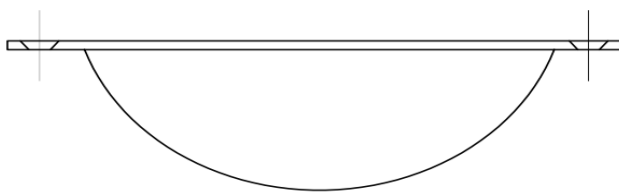

SIDE VIEW





END VIEW

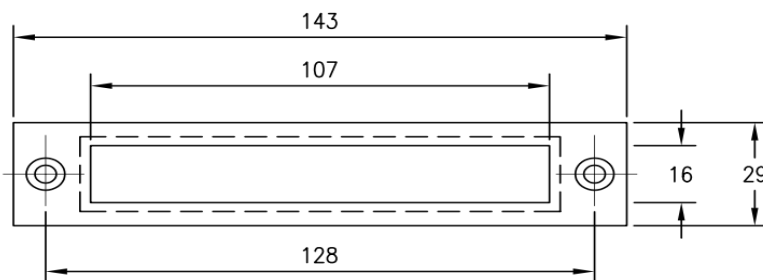

### CD 353



LOCK TROUGH

PLAN

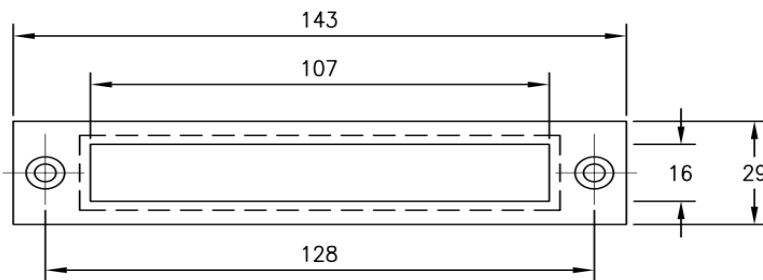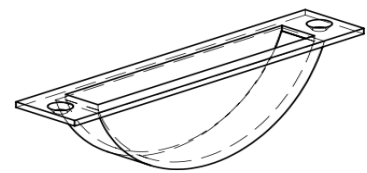

### CD 353C

PLAN, FOR SWING DOOR

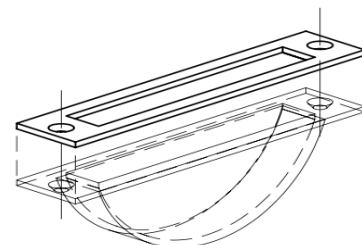

### CD 353C/S

PLAN, FOR SLIDING DOOR

#### AVAILABLE FINISHES

- Stainless: SSS, PSS





#### TECHNICAL DETAILS

- CD353: Cast lock trough floor keeper to suit DC590 long throw dead lock, finished in SCP
- CD353C: Lock trough cover plate to provide special finishes for CD353 lock trough
- CD353C/S: Lock trough cover plate to provide restricted trough opening for sliding door application

## KEEPERS

**CD 60**


TOP HAT KEEPER

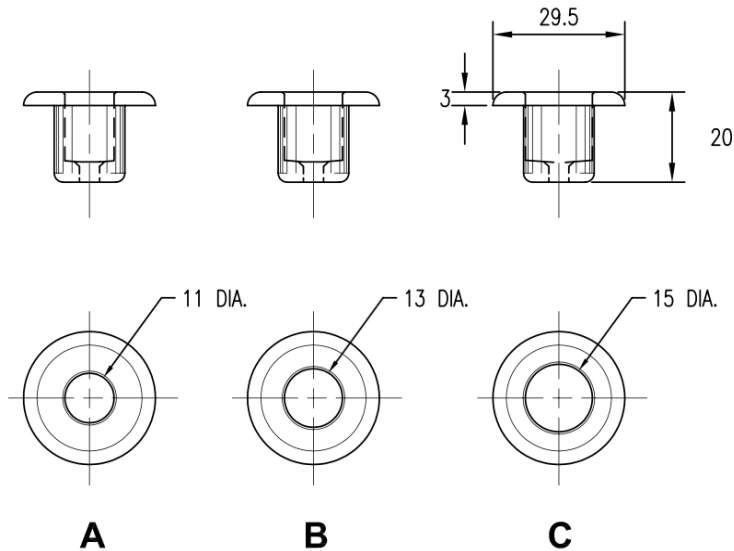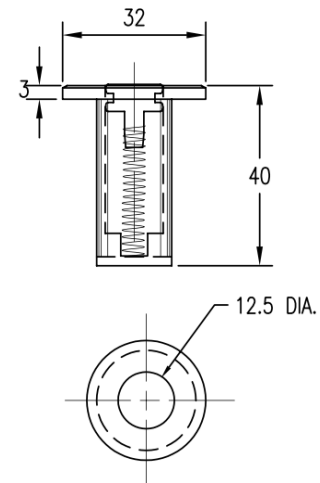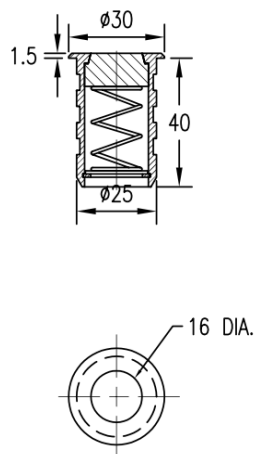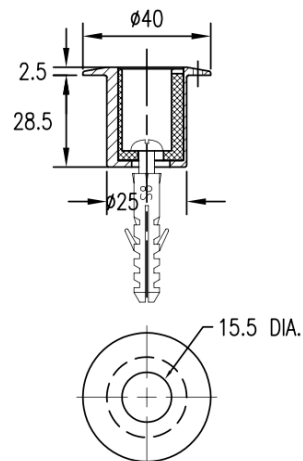**CD 60S**TOP HAT KEEPER  
WITH DUST COVER**H80519300099**TOP HAT KEEPER WITH  
SPRING LOADED COVER**M05.194**UNIVERSAL ECCENTRIC  
BUSH KEEPER**AVAILABLE FINISHES**

- CD60 - Aluminium: Mill, SAA
- CD60S - Brass: SCP
- M05.193 - Aluminium: SAA
- M05.194 - Stainless: SSS



## 48700 Corner Lock

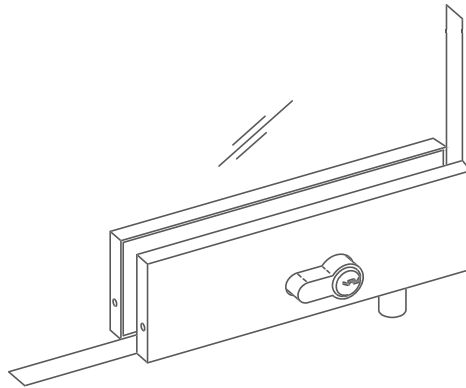


### AVAILABLE FINISHES

- Satin silver anodised
- Polished stainless steel
- Satin stainless steel
- Polished brass


### TECHNICAL DETAILS

- Corner pin lock – CASMA
- Maximum glass hold 150kg
- Recommended torque for fixing screws  
Nm 14-16
- Euro style cylinder


DETAIL

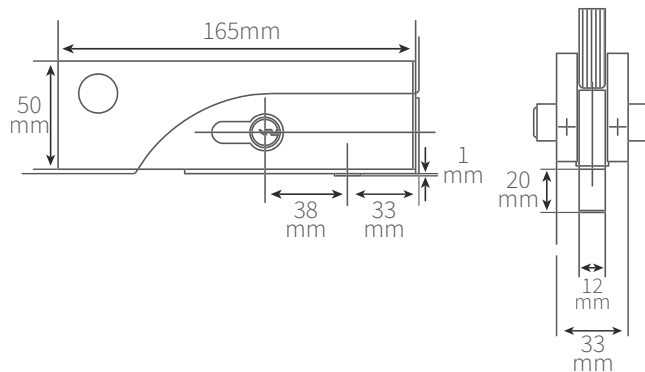

INSITU APPLICATION

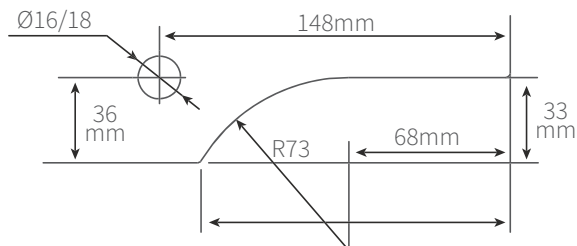

## 14600 /14700 Internal cylinder / snib lock

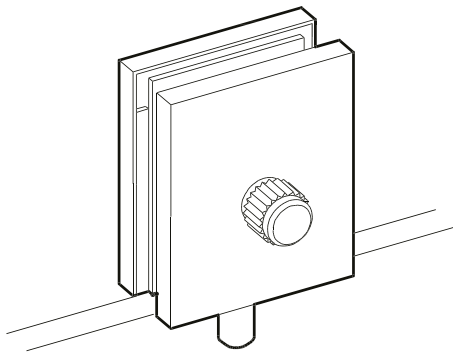




## AVAILABLE FINISHES

- Polished stainless steel
- Satin stainless steel





## TECHNICAL DETAILS

- Bottom pin lock with thumbturn (14700) or lock (14600)
- Internal single snib lock
- Maximum glass hold 90kg


DETAIL

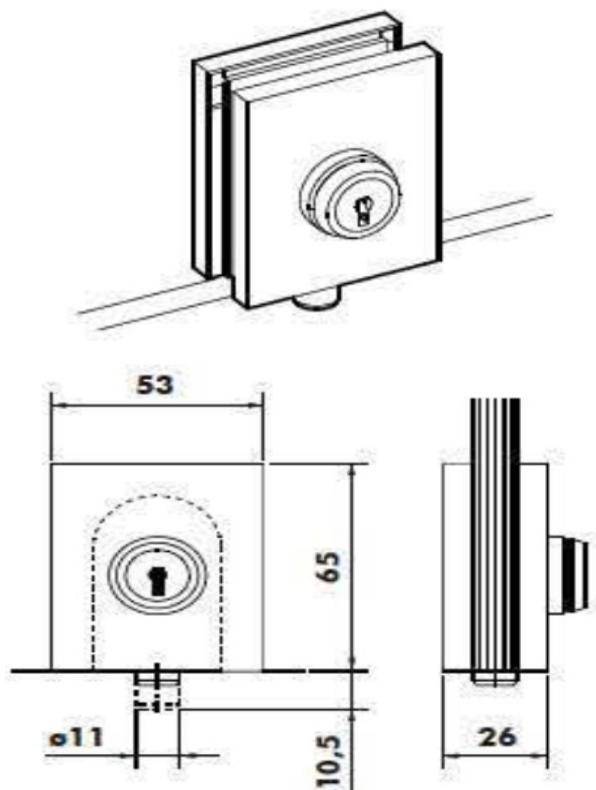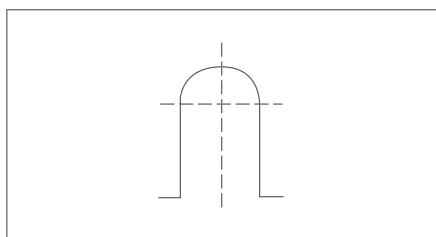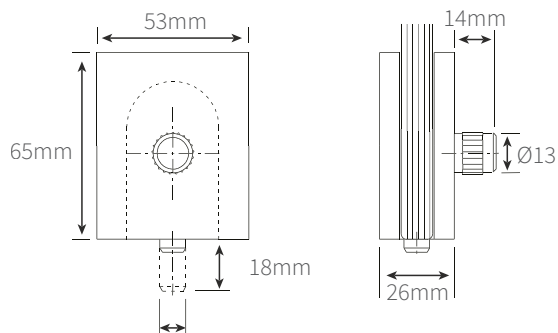

## 15501 / 15502 Floor Ferule

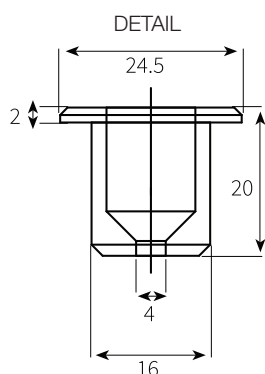

INSITU APPLICATION




### AVAILABLE FINISHES

- Natural anodised

### TECHNICAL DETAILS

- To be used in flooring or structure with pin locks
- Use with 10, 12 and 13 diameter pin style locks in show cases

## 15519 Floor Ferule Elongated Hole




DETAIL

## AVAILABLE FINISHES

- Satin stainless steel

## TECHNICAL DETAILS

- To be used in flooring or structure with pin locks
- Elongated hole for adjustment with lock on site
- Suitable for eurostyle pin locks in floor

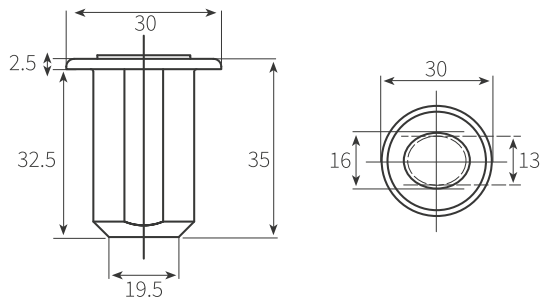

INSITU APPLICATION

